


REV	DESCRIPTION	MARK
XI	first edition	

### SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1.0A AC/DC (AWG#28)
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100M  $\Omega$  min
- Temperature range: -25 °C - +85 °C
- Contact resistance: 20m $\Omega$

### HOUSING

- Poles: 2-20
- Material: Thermoplastic UL94V-0
- Q'TY: 1000 pcs/bag

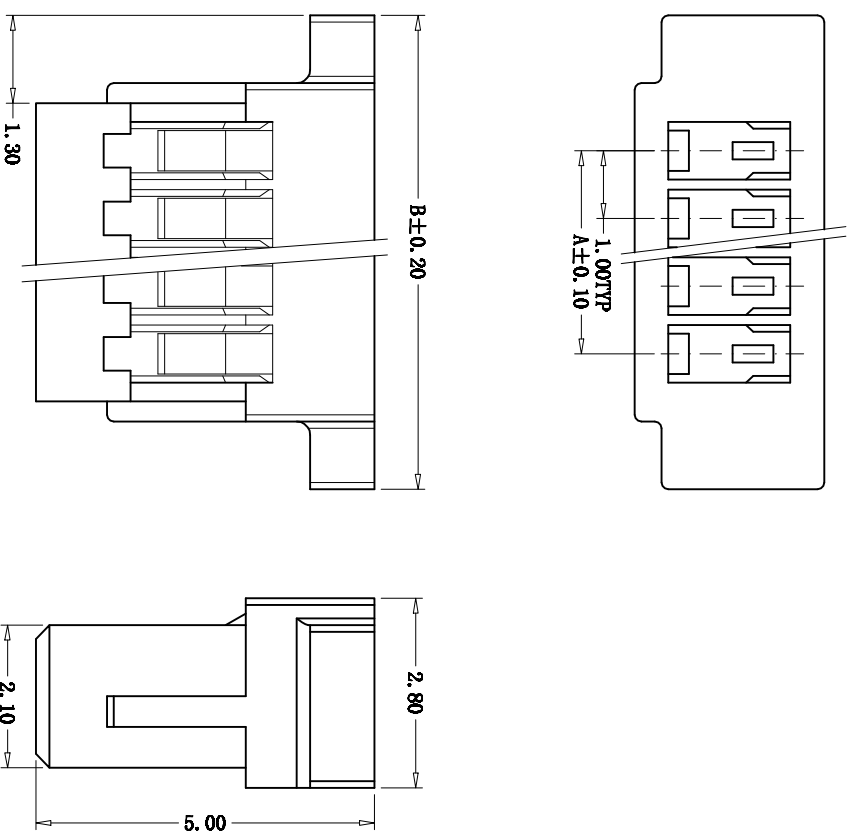

NO	DIMENSION (mm)		NO	DIMENSION (mm)	
	A	B		A	B
1	1.00	5.00	12	11.00	15.00
2	2.00	6.00	13	12.00	16.00
3	3.00	7.00	14	13.00	17.00
4	4.00	8.00	15	14.00	18.00
5	5.00	9.00	16	15.00	19.00
6	6.00	10.00	17	16.00	20.00
7	7.00	11.00	18	17.00	21.00
8	8.00	12.00	19	18.00	22.00
9	9.00	13.00	20	19.00	23.00
10	10.00	14.00			
11					

<b>钰赛实业(深圳)有限公司</b> JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		<b>TITLE:</b> 1.0T-1-nY	
<b>MAT'L</b> MAT'L Phenolic bronze	<b>USE:</b>	<b>PART NO.:</b>	
<b>FINISH</b> Tin Plated	<b>APPD:</b>	<b>DWG NO.:</b>	
<b>CHKD:</b>	<b>DR:</b>	<b>SCALE</b> 1:1	<b>SHEET</b> 1/1
<b>UNITS:</b>	<b>Q'TY</b>	<b>REV.</b> XI	