
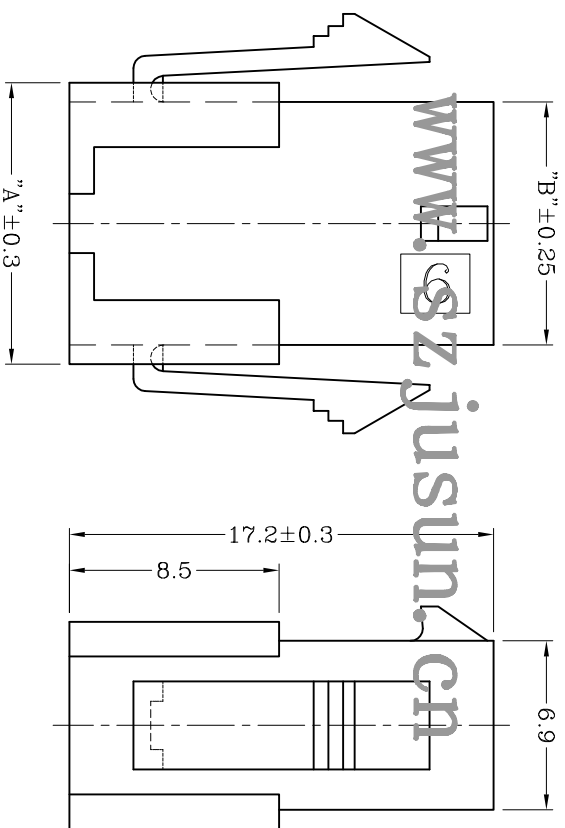


DIM.	DIM. A	DIM. B	DIM. C
Poles			
2x1	5.4	3.85	—
2x2	8.4	6.85	3.00
2x3	11.4	9.85	6.00
2x4	14.4	12.85	9.00
2x5	17.4	15.85	12.00
2x6	20.4	18.85	15.00
2x7	23.4	21.85	18.00
2x8	26.4	24.85	21.00
2x9	29.4	27.85	24.00
2x10	32.4	30.85	27.00
2x11	35.4	33.85	30.00
2x12	38.4	36.85	33.00

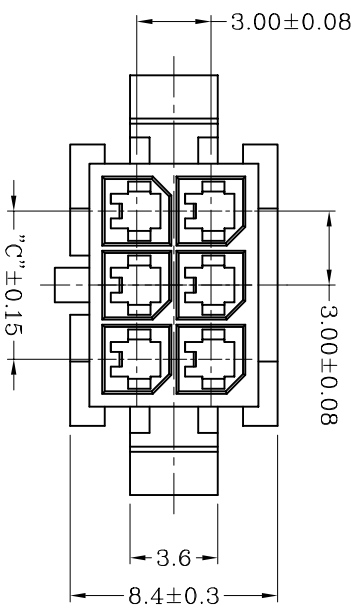

- 技术参数 SPECIFICATIONS
- ◆ 适用线规: AWG#24~#20
- ◆ Applicable Wire: AWG#24~#20
- ◆ 额定电压: 250V DC,AC(rms)
- ◆ Rated voltage: 250V DC,AC(rms)
- ◆ 额定电流: 5.0A
- ◆ Rated Current: 5.0A
- ◆ 耐压值: 1000V AC/minute
- ◆ Withstand voltage: 1000V AC/min.
- ◆ 工作温度: -40°C ~ +105°C
- ◆ Working Temp: -40°C ~ +105°C
- ◆ 绝缘电阻: ≥1000 MΩ
- ◆ Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤10mΩ
- ◆ Contact resistance: ≤10mΩ

■ 材料 MATERIAL

- ◆ 塑胶: 尼龙66 (Nylon66), UL94-V0

		GENERAL TOLERANCE		SCALE: 3.5:1		DRAWN:		DATE:		DWG. NO. :		TITLE:		REV.	
		XX ±0.40		UNIT: mm	CHECK:	DATE:	E:\DWG\Production\3001	塑胶图		A					
X ±0.30		SIZE: A4	APPROVE:	DATE:	PARTS NO. :	3001-2xNR		SHEET:		1/1					
X ±0.25	X° ± 2°														
.XX ±0.15	X° ± 1°														

恒泰实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD