
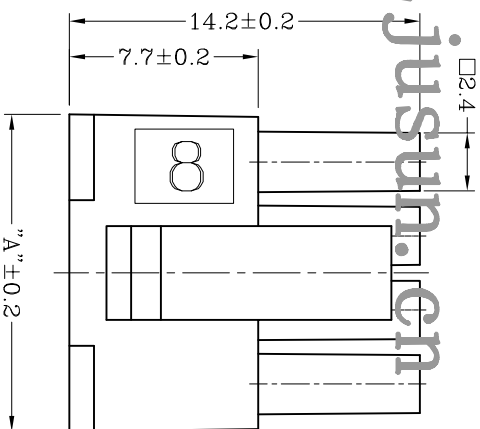
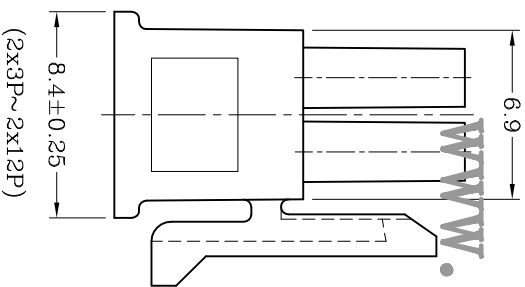
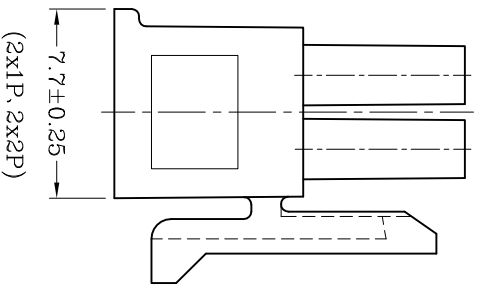


POLES	DIM.A	DIM.B
2x1P	—	3.85
2x2P	3.00	6.85
2x3P	6.00	9.85
2x4P	9.00	12.85
2x5P	12.00	15.85
2x6P	15.00	18.85
2x7P	18.00	21.85
2x8P	21.00	24.85
2x9P	24.00	27.85
2x10P	27.00	30.85
2x11P	30.00	33.85
2x12P	33.00	36.85

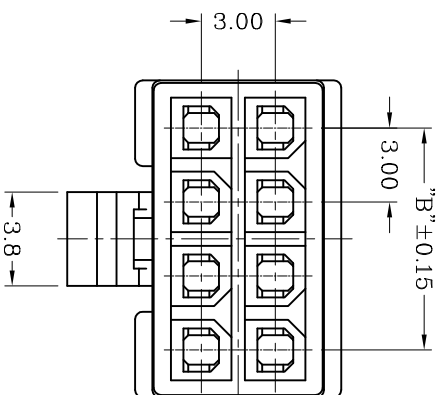

### 技术参数 SPECIFICATIONS

- ◆ 间距: 3.0 Pitch: 3.0
- ◆ 极数: 2-24 Poles: 2-24
- ◆ 适用线规: AWG#30~#20
- ◆ Applicable Wire: AWG#30~#20
- ◆ 额定电压: AC, DC, 250V (有效值)
- ◆ Voltage rating: AC, DC, 250V (rms)
- ◆ 额定电流: 3.0A AC, DC
- ◆ Rated Current: 3.0A AC, DC
- ◆ 耐压值: 1000V AC/minute
- ◆ Withstand voltage: 1000V AC/min.
- ◆ 工作温度: -25° C ~ +85° C
- ◆ Working Temp: -25° C ~ +85° C
- ◆ 绝缘电阻: ≥1000 MΩ
- ◆ Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤20mΩ
- ◆ Contact resistance: ≤20mΩ

### 材料 MATERIAL

- ◆ 塑胶: 尼龙 (Nylon), UL94-V0

### 包装方式 PACKAGE

- ◆ 袋装 Bag Package

 恒泰实业(深圳)有限公司 JUSUN INDUSTRIAL (SHENZHEN) CO.,LTD		GENERAL TOLERANCE		SCALE: 3.5:1		DRAWN:		DATE:		DWG. NO. :		TITLE:		REV.	
		XX. ±0.25	XXX. ±0.40	UNTT:	mm	CHECK:	DATE:	E:\DWG\Production\3001	塑胶图	A					
X. ±0.20	.XXX ±0.05	SIZE:	A4	APPROVE:	DATE:	PARTS NO. :	3001-2NY	SHEET:	1/1						
.XX ±0.15	X.° ± 2°														
.XX ±0.08	X.° ± 1°														