




REV	DESCRIPTION	MARK
II	first edition	

SPECIFICATIONS

- Voltage rating: 50V AC, DC
 - Current rating: 1.0A AC/DC (AWG#28)
 - Withstanding voltage: 500V AC/minute
 - Insulation resistance: 100M Ω /min
 - Temperature range: -25°C - +85°C
 - Contact resistance: 20m Ω max
- WAFER**
- Poles: 2-20
 - Material: Phos. Bronze, Tin Plated
 - Q' TY: 1000 pcs/Tape & Reel
- Base: Thermoplastic UL94V-0

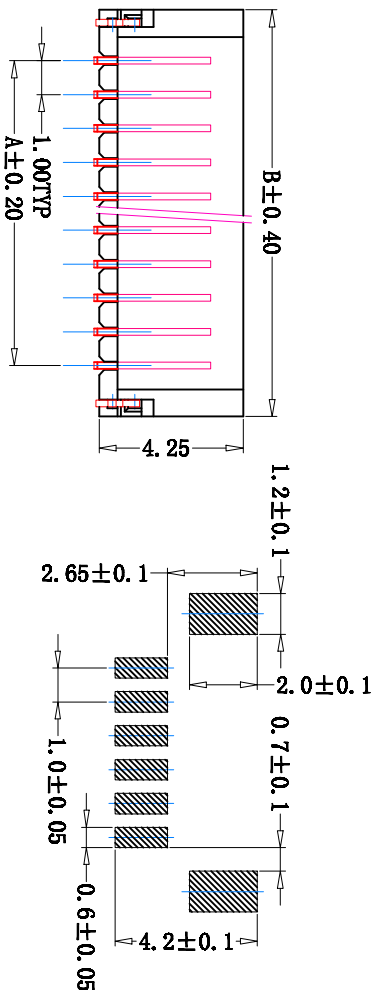

www.szjusun.cn

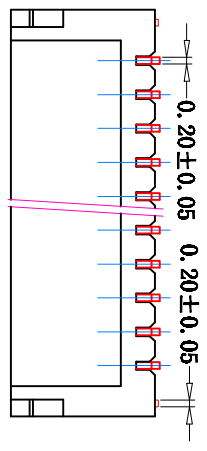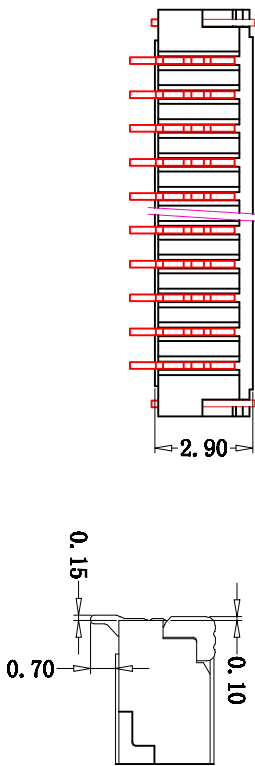

Poles	DIMENSION (mm)		Poles	DIMENSION (mm)	
	A	B		A	B
2	1.00	4.00	12	11.00	14.00
3	2.00	5.00	13	12.00	15.00
4	3.00	6.00	14	13.00	16.00
5	4.00	7.00	15	14.00	17.00
6	5.00	8.00	16	15.00	18.00
7	6.00	9.00	17	16.00	19.00
8	7.00	10.00	18	17.00	20.00
9	8.00	11.00	19	18.00	21.00
10	9.00	12.00	20	19.00	22.00
11	10.00	13.00			

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

APPD: MAT'L: FINISH: CHRD: DR:

Q' TY: DR:

SCALE: 1:1

SHEET: 1/1

REV: XI

PART NO.: 1.0T-1-ABV立贴

CUS PART NO.:

DATE: 2017.07.31

VERSION: VI.0