

REV	DESCRIPTION	MARK
II	first edition	




**■ SPECIFICATIONS**

- Voltage rating: 50V AC, DC
- Current rating: 1.0A AC/DC (AWG#28)
- Withstanding voltage: 500V AC/minute
- Insulation resistance: 100M  $\Omega$  min
- Temperature range: -25°C - +85°C
- Contact resistance: 20m $\Omega$  max

**■ WAFER**

- Poles: 2-20
- Material: Contact: Phos. Bronze, Tin Plated
- Base: Thermoplastic UL94V-0
- Q'TY: 1000 pcs/Tape & Reel

www.szjusun.cn

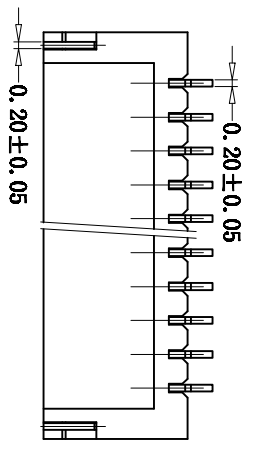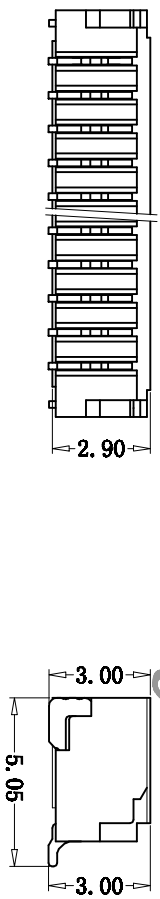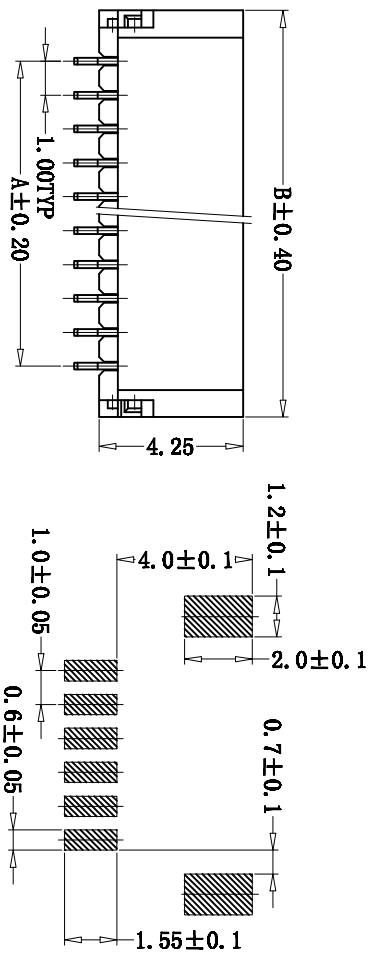

Poles	DIMENSION (mm)		Poles	DIMENSION (mm)	
	A	B		A	B
2	1.00	4.00	12	11.00	14.00
3	2.00	5.00	13	12.00	15.00
4	3.00	6.00	14	13.00	16.00
5	4.00	7.00	15	14.00	17.00
6	5.00	8.00	16	15.00	18.00
7	6.00	9.00	17	16.00	19.00
8	7.00	10.00	18	17.00	20.00
9	8.00	11.00	19	18.00	21.00
10	9.00	12.00	20	19.00	22.00
11	10.00	13.00			

		<b>炬赛实业(深圳)有限公司</b> JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		<b>PART NO.:</b> 1.0T-1-PAWB贴片	
<b>APPD:</b>		<b>FINISH:</b>		<b>DATE:</b> 2017.07.31	
<b>APPD:</b>		<b>CHRD:</b>		<b>VERSION:</b> V1.0	
<b>UNITS:</b>		<b>Q'TY:</b>		<b>SCALE:</b> 1:1	
<b>DR:</b>		<b>DR:</b>		<b>SHEET:</b> 1/1	
<b>REVISION:</b>		<b>REVISION:</b>		<b>REV.:</b> XI	