
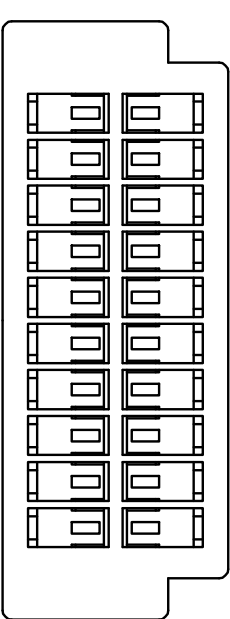
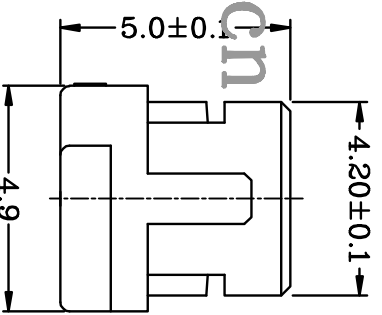
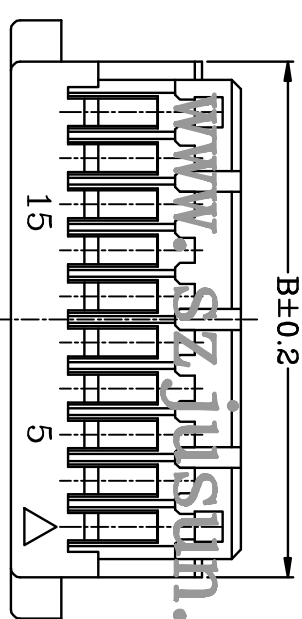



极数	A尺寸	B尺寸	C尺寸
10	9.00	11.20	13.00
15	14.00	16.20	18.00
20	19.00	21.20	23.00
25	24.00	26.20	28.00

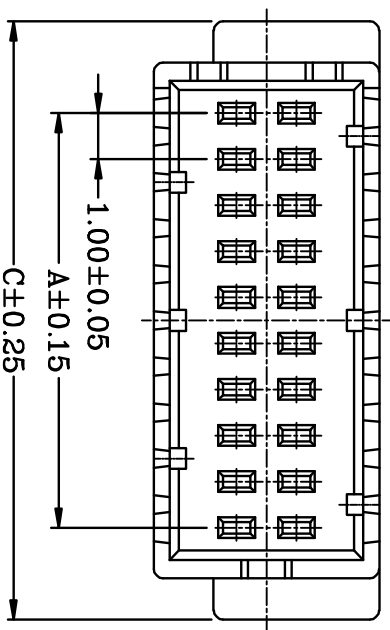

技术参数 SPECIFICATIONS

- ◆ 额定电压: AC/DC, 50V
Voltage rating: AC/DC, 50V
- ◆ 额定电流: 10A, AC/DC
Current rating: 10A, AC/DC
- ◆ 耐压值: 500V AC/minute
Withstand voltage: 500V AC/minute
- ◆ 工作温度: -25℃ ~ +85℃
Working Temperature: -25℃ ~ +85℃
- ◆ 绝缘电阻: > 100 MΩ
Insulation resistance: > 100 MΩ
- ◆ 接触电阻: < 0.02 Ω
Contact resistance: < 0.02 Ω
- ◆ 本体材质: 尼龙66 UL94V-0
Welder Material: Nylon66 UL94V-0

包装方式 PACKAGE

- ◆ 编带包装 Tape and Reel Package
- ◆ 管装 Pipe Package
- ◆ 袋装 Bag Package

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO., LTD

X ±	X' ±	MAT'L	USE:	TITLE:
X ± 0.25	X' ±	FINISH	APP'D:	1.0T-2-2XnY
XX ± 0.15	XX' ±	CHKD:	DR:	PART NO.:
XXX ± 0.05	XXX' ±	UNIT	SCALE	SHEET
UNIT	mm	Q'TY	1:1	1/1
			REV.	X1

REV	DESCRIPTION	MARK
X1	First edition	