
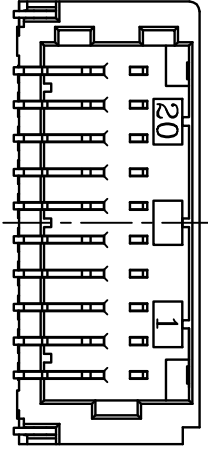




REV	DESCRIPTION	MARK
X1	First edition	

**技术参数 SPECIFICATIONS**

- ◆ 额定电压: AC,DC,50V  
Voltage rating: AC,DC,50V
- ◆ 额定电流: 1.0A,AC,DC (AWG#28)  
Current rating: 1.0A,AC,DC(AWG#28)
- ◆ 耐压值: 500V AC/minute  
Withstand voltage: 500V AC/minute
- ◆ 工作温度: -25℃~+85℃  
Working Temperature: -25℃~+85℃
- ◆ 绝缘电阻: > 100 MΩ  
Insulation resistance: > 100 MΩ
- ◆ 接触电阻: < 0.02 Ω  
Contact resistance: < 0.02 Ω
- ◆ 本体材质: 尼龙9T UL94V-0  
Wafar Material: Nylon9T UL94V-0
- ◆ 接触件材质: 磷青铜  
Contact Material: Phosphor Bronze

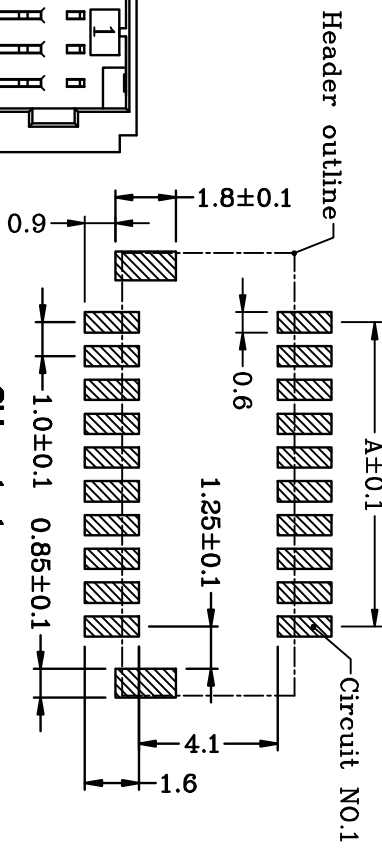

**Side entry type**

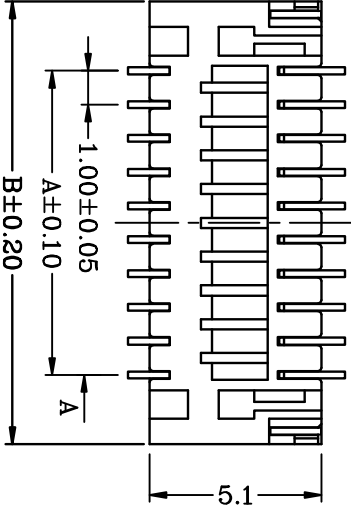

极数	A尺寸	B尺寸
10	9.00	13.1
15	14.00	18.1
20	19.00	23.1
25	24.00	28.1

**包装方式 PACKAGE**

- ◆ 编带包装 Tape and Reel Package
- ◆ 管装 Pipe Package
- ◆ 袋装 Bag Package

www.szjustun.cn

**JUSUN 钜赛实业(深圳)有限公司**  
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

X ±	X' ±	MAT'L	USE:	TITLE:	PART NO.:	
X ± 0.25	X' ±	FINISH	APPD:	1.0T-2XnAWB		
XX ± 0.15	XX' ±	CHKD:	DR:	DWG NO.:	SCALE	SHEET
XXX ± 0.05	XXX' ±	UNIT	DR:	1:1	1/1	REV.
		mm				X1