

REV	DESCRIPTION	DATE
X1	First edition	


技术参数 SPECIFICATIONS

- ◆ 极数: 2~30 Poles: 2~30
- ◆ 额定电压: AC, DC, 125V
- ◆ Rated voltage: AC, DC, 125V
- ◆ 额定电流: 1.0A AC, DC
- ◆ Rated Current: 1.0A AC, DC
- ◆ 耐压值: 500V AC/minute
- ◆ Withstand voltage: 500V AC/minute
- ◆ 工作温度: -25° C ~ +85° C
- ◆ Working Temperature: -25° C ~ +85° C
- ◆ 绝缘电阻: ≥100 MΩ
- ◆ Insulation resistance: ≥100 MΩ
- ◆ 接触电阻: ≤20mΩ
- ◆ Contact resistance: ≤20mΩ

材料 MATERIAL

- ◆ 针座: 尼龙9T (Nylon9T), UL94-V0
- ◆ 插针: 磷青铜 (Phosphor bronze)
- ◆ 接地片: 磷青铜 (Phosphor bronze)

Part No.	DIMENSIONS		
	DIM.A	DIM.B	DIM.C
1.25T-4-2AWB	1.25	7.65	7.65
1.25T-4-3AWB	2.50	8.90	8.90
1.25T-4-4AWB	3.75	10.15	10.15
1.25T-4-5AWB	5.00	11.40	11.40
1.25T-4-6AWB	6.25	12.65	12.65
1.25T-4-7AWB	7.50	13.90	13.90
1.25T-4-8AWB	8.75	15.15	15.15
1.25T-4-9AWB	10.00	16.40	16.40
1.25T-4-10AWB	11.25	17.65	17.65
1.25T-4-11AWB	12.50	18.90	18.90
1.25T-4-12AWB	13.75	20.15	20.15
1.25T-4-13AWB	15.00	21.40	21.40
1.25T-4-14AWB	16.25	22.65	22.65
1.25T-4-15AWB	17.50	23.90	23.90
1.25T-4-20AWB	23.75	30.15	30.15
1.25T-4-30AWB	36.25	42.65	42.65

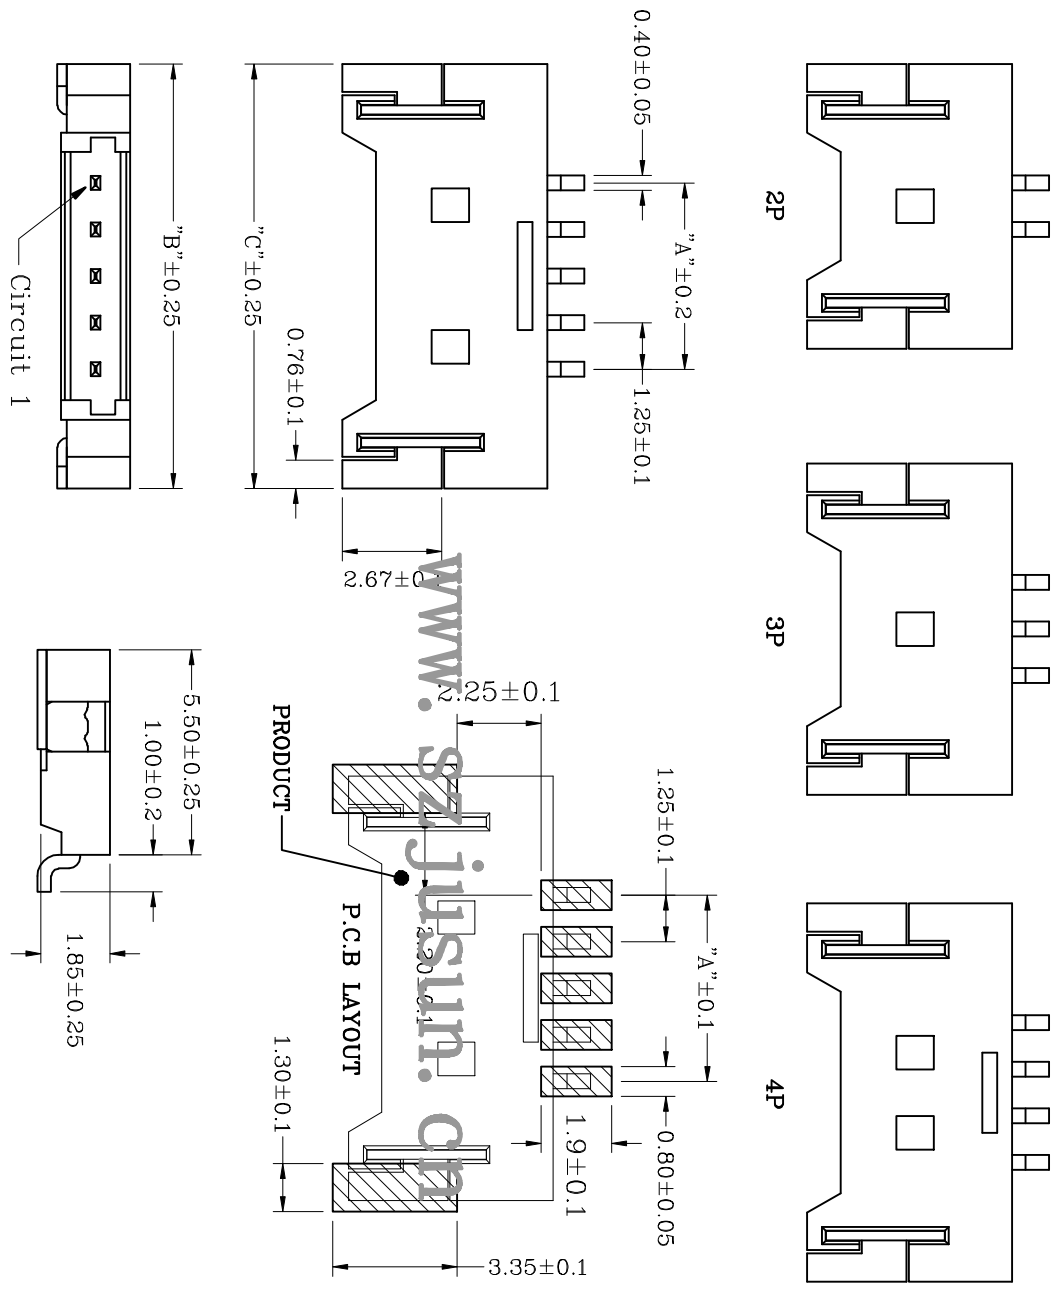

JUSON 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: 1.25T-4-nAWB H=1.85mm
PART NO.:

USE: MAT'L

FINISH

APPD:

CHEKD:

SCALE 1:1

DR:

UNITS: mm

Q'TY

SCALE 1:1

REV. X1