
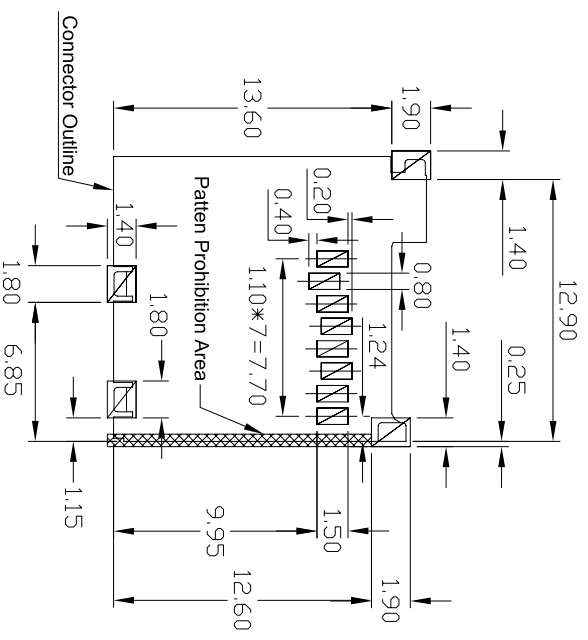
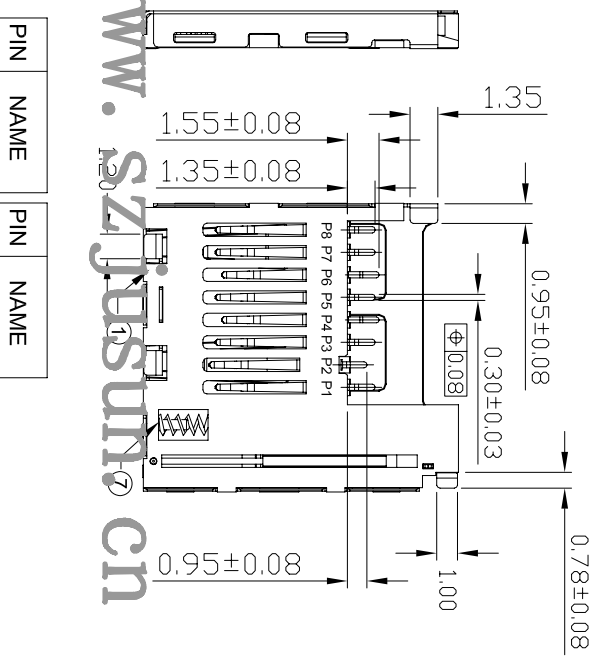
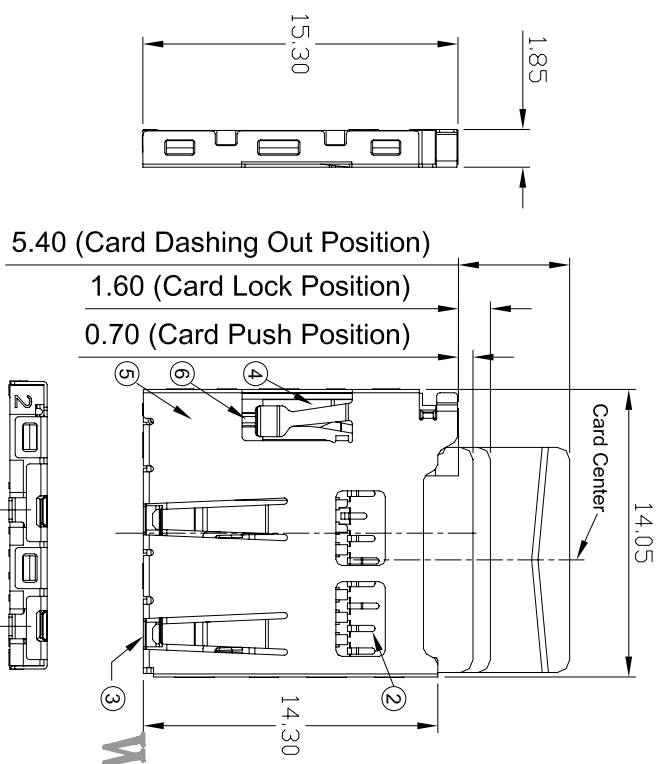


REV: A0	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
					HANG

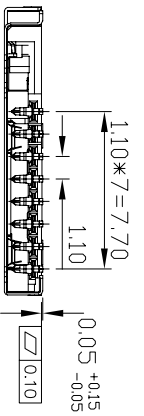


P.C.B Layout

PIN	NAME	PIN	NAME
P1	DATA2	P5	CLK
P2	CD/DAT3	P6	VSS
P3	CMD	P7	DAT0
P4	VDD	P8	DAT1 ²

- ELETRICAL**
- 1、Contact resistance: 100m ohms max
 - 2、Dielectric Withstanding Voltage: 500VAC/1 minute
 - 3、Current rating: 0.5A
 - 4、Insulation resistance: 1000M ohms min. at 250VDC
 - 5、Operating voltage: 250V (AC/DC)
 - 6、Operating Temperature: -20+65
 - 7、Mating Cycle: 10000 cycles, spring is not breaking

ITEM	DESCRIPTION	QTY	MATERIAL	REMARK
①	Housing	1Pcs	LCP E471i	UL94V-0, COLOR BLACK
②	Contact	8Pcs	C5191-1/2H	50U"NI, Selective gold on contact area, Tin 160U"
③	Ground	1Pcs	C2680-H	50U"NI, Tin 160U"
④	Carrier	1Pcs	PA9T	UL94V-0, COLOR BLACK
⑤	Shell	1Pcs	SUS304-H	50U"NI, Gold Flash
⑥	Hook	1Pcs	SUS304-H	
⑦	Spring	1Pcs	SWP-B	



巨赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

DRAW NO.: 070-02D-08 DATE: 070506

DESIGN: HANG 070505

CHECK: WANGCH 070506

APPROVED: HUXX 070506

DRAW NAME: T-Flash Card Connector Push Type 内模

P/N NO. 070-02D-08XX

UNIT: mm SHEET: N/A

MODEL: REV. A0 SCALE N/A