
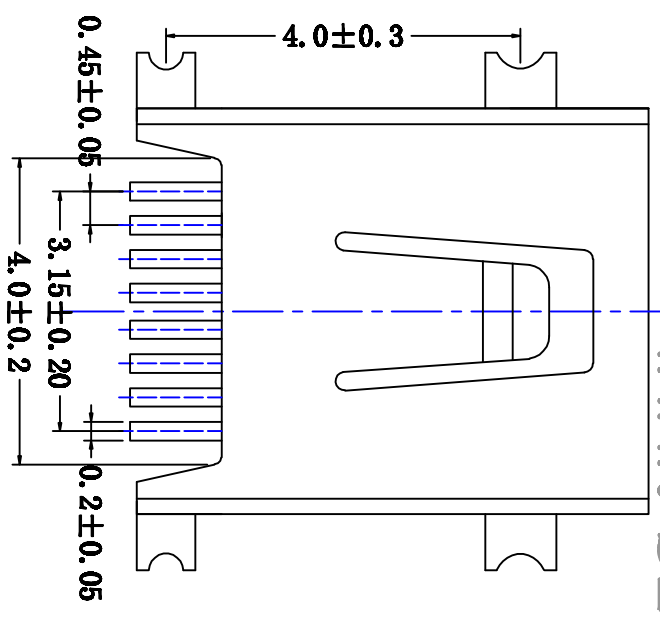
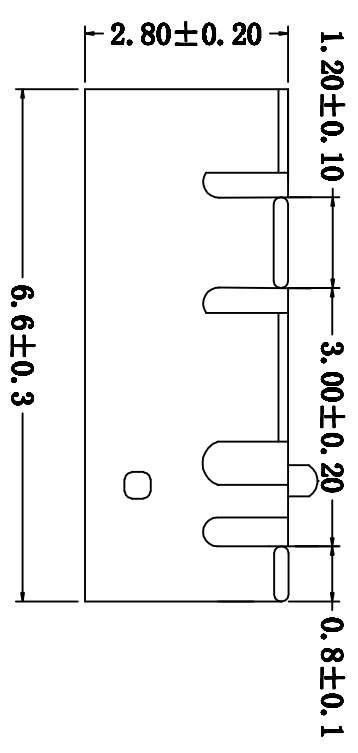


REV	DESCRIPTION	MARK
X1	first edition	

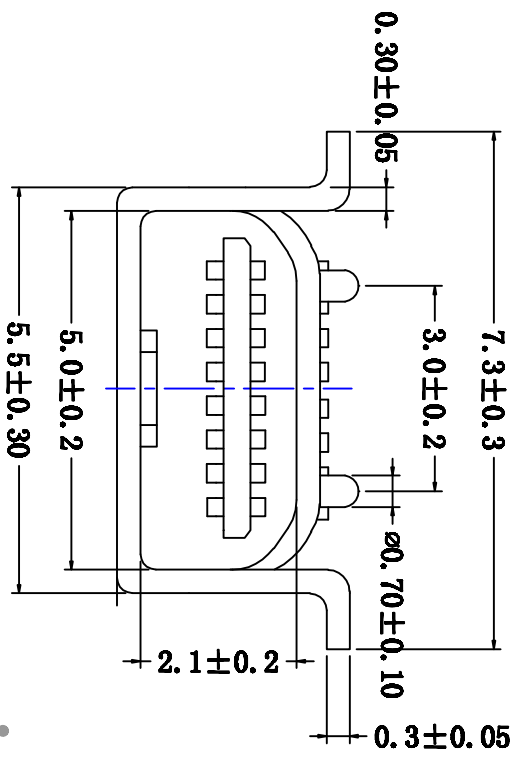

www.szjusun.cn

二. 电气性能:

- 1-1 额定负荷: 1A 30V DC
- 1-2 接触电阻: 30mΩ
- 1-3 绝缘电阻: 1000MΩ/min
- 1-4 耐电压: 500V AC/min

三. 物理特性:

- 2-1. 温度范围: -20℃~85℃
- 2-2. 外观: 参考图纸具体见实物.
- 三. 材质: 塑胶件: LCP,
外壳: 黄铜H65, 镀锡
端子: 黄铜, 镀锡

		炬赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: MINI USB-8P SMT Female	
K ±	K' ±	MAT'L	USE:	PART NO.:	
.X ± 0.25	.X' ±		APPD:	DWG NO.:	
.XX ± 0.10	.XX' ±	FINISH	CHD:	SCALE	1:1
.XXX ±	.XXX' ±		DR:	SHEET	1/1
UNITS: mm			Q'TY	REV.	X1