
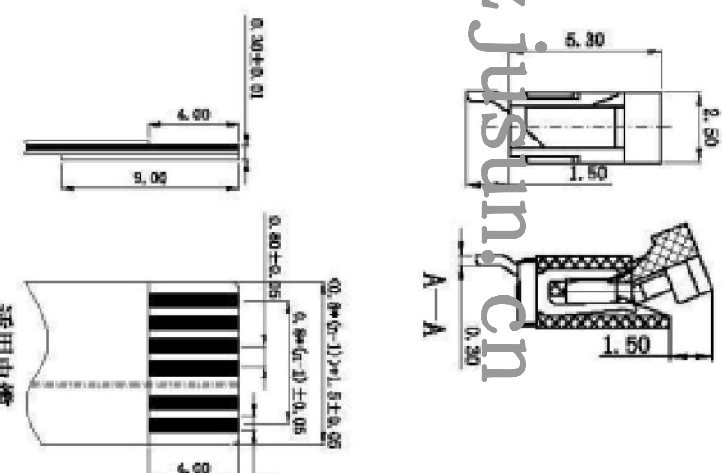


REV	DESCRIPTION	MARK
X1	first edition	

性能:
 额定电流: 0.5A
 额定电压: 50V
 耐电压: 500V
 绝缘电阻: 800MΩ
 接触电阻: 20mΩ
 工作温度: -20℃~+65℃

材料:
 塑件 (材质): LCP, UL94V-0
 铜条 (材质): PPS, UL94V-0
 铜簧 (材质): 磷青铜, 镀锡;
 铜片 (材质): 磷青铜, 镀锡;

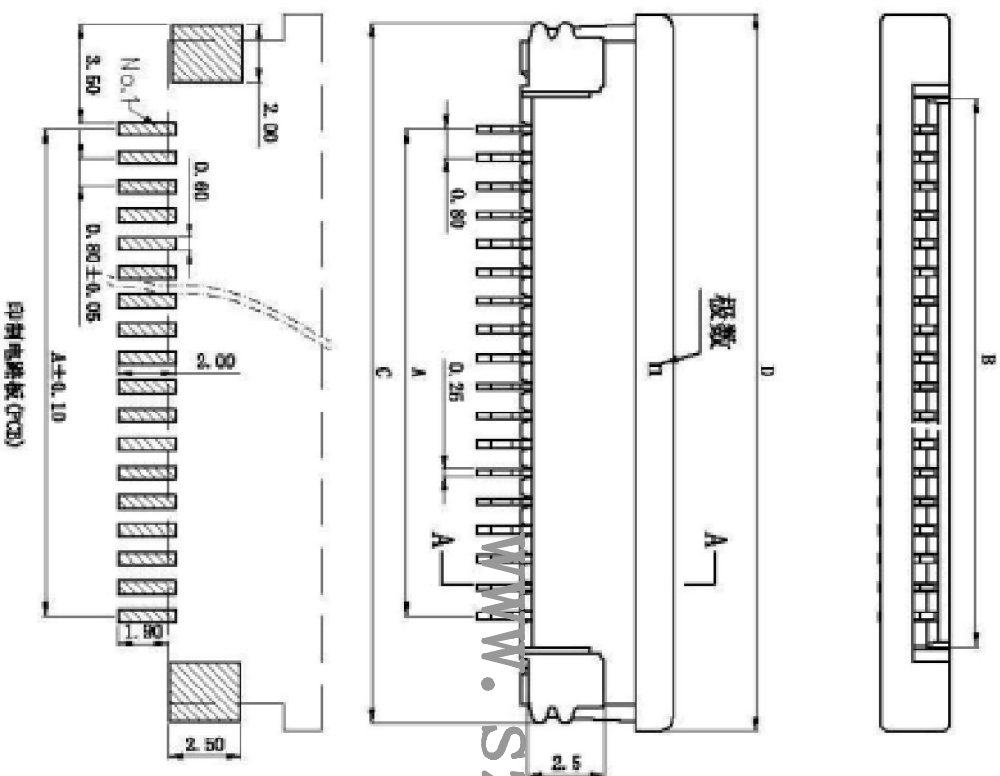

孔位	A	B	C	D
1	2.4	4	9.6	10.3
2	3.2	4.8	10.4	11.1
3	4	5.6	11.2	11.9
4	4.8	6.4	12	12.7
5	5.6	7.2	12.8	13.5
6	6.4	8	13.6	14.3
7	7.2	8.8	14.4	15.1
8	8	9.6	15.2	15.9
9	8.8	10.4	16	16.7
10	9.6	11.2	16.8	17.5
11	10.4	12	17.6	18.3
12	11.2	12.8	18.4	19.1
13	12	13.6	19.2	19.9
14	12.8	14.4	20	20.7
15	13.6	15.2	20.8	21.5
16	14.4	16	21.6	22.3
17	15.2	16.8	22.4	23.1
18	16	17.6	23.2	23.9
19	16.8	18.4	24	24.7
20	17.6	19.2	24.8	25.5
21	18.4	20	25.6	26.3
22	19.2	20.8	26.4	27.1
23	20	21.6	27.2	27.9
24	20.8	22.4	28	28.7
25	21.6	23.2	28.8	29.5
26	22.4	24	29.6	30.3
27	23.2	24.8	30.4	31.1
28	24	25.6	31.2	31.9
29	24.8	26.4	32	32.7
30	25.6	27.2	32.8	33.5
31	26.4	28	33.6	34.3
32	27.2	28.8	34.4	35.1
33	28	29.6	35.2	35.9
34	28.8	30.4	36	36.7
35	29.6	31.2	36.8	37.5

JUSUN 钜赛实业(深圳)有限公司
 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: 0.8S-1S-nPW/B
 CUS PART NO.:

X ±	X' ±	MAT'L	USE:	SCALE	SHEET	REV.
X ± 0.1	X' ±	FINISH	APPD:	1:1	1/1	X1
XX ± 0.05	XX' ±	CHKD:	DR:			
XXX ±	XXX' ±	UNITS: mm	Q'TY			