

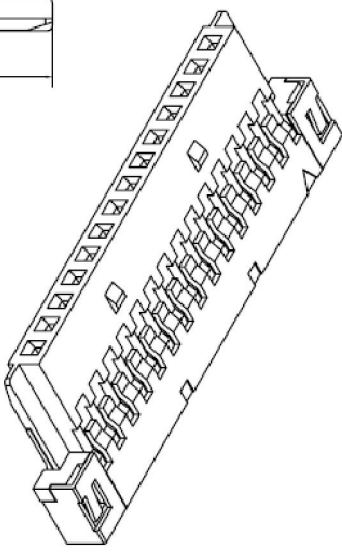
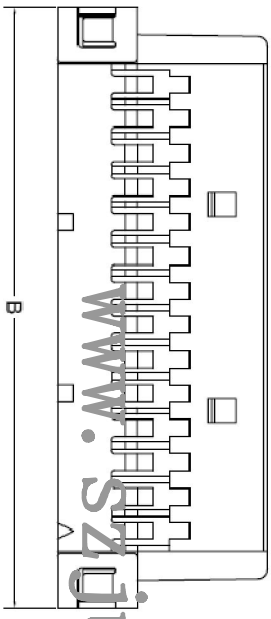


REV	DESCRIPTION	MARK
X1	first edition	

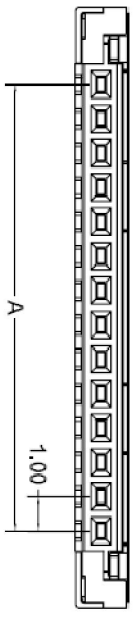

Poles	Dimensions	
	A	B
8	7.00	11.50
14	13.00	17.50
20	19.00	23.50
30	29.00	33.50

SPECIFICATIONS
 Current rating: 1A AC, DC
 Voltage rating: 50V AC, DC
 Temperature range: -25° C ~ +85° C
 Insulation resistance: 500MΩ/min.
 Withstanding voltage: 500V AC/ minute.
 Contact resistance: 20m Ω/ max.
 MATERIAL : NYLON , UL94V-0
 SHELL-PHOSPHOR BRONZE/TIN-PLATED
 SUITABLE KR1002-T SERIES TERMINAL
 MATES WITH KR1002WR SERIES WAFER
 MOC:1,000PCS

www.szjusun.cn

巨赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: DF19-1Y (Housing)
X ± 0.50 X ± 0.30 .XX ± 0.10 .XXX ±	X° ± . X° ± 0.1° .XX° ± 0.05° .XXX° ±	MAT'L FINISH CHKD: DR:
UNITS: mm	Q'TY DR:	CUS PART NO.: DATE 2017.04.23 SCALE 1:1
		VERSION V1.0 REV. X1