
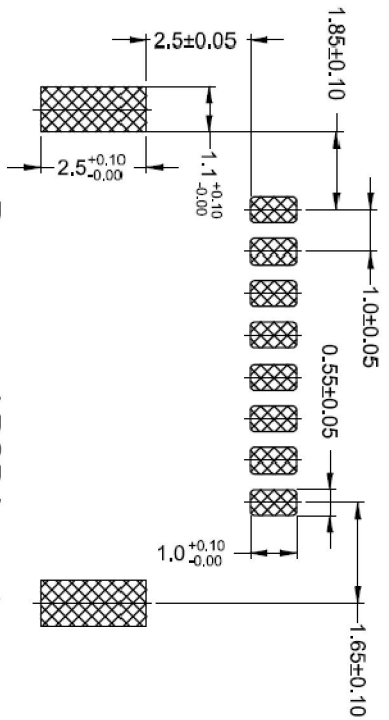
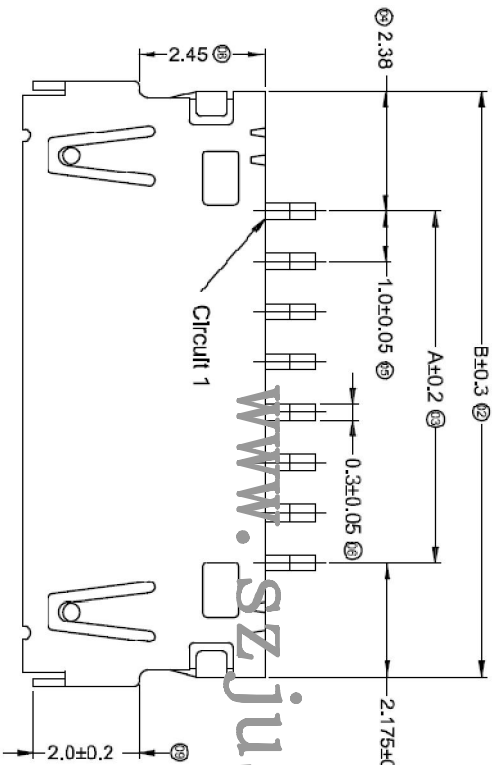
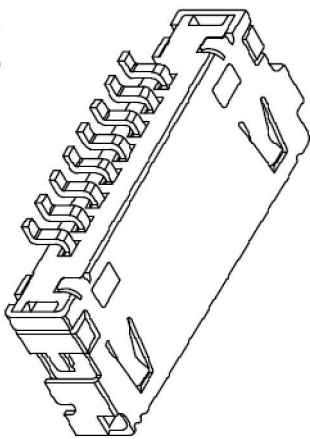


REV	DESCRIPTION	MARK
X1	first edition	

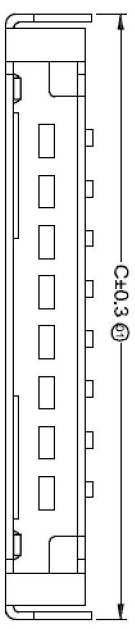

Recommend PCB Layout

- Specifications :
- Voltage rating: 100V AC / DC
 - Current rating: 1A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥500MΩ
 - Contact resistance: ≤30mΩ
 - After environmental testing : ≤40mΩ

Poles	Dimensions(mm)		
	A	B	C
8	7.00	11.50	11.95
14	13.00	17.50	17.95
20	19.00	23.50	23.95
30	29.00	33.50	33.95

巨赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: DF19-nAMB
X. ± 0.50 X ± 0.30 .XX ± 0.10 .XXX ±	X* ± . X* ± 0.1* .XX* ± 0.05* .XXX* ±	MAT'L APPD: FINISH CHKD: Q'TY DR:
	UNITS: mm	CUS PART NO.: DATE 2017.04.23 SCALE 1/1
		VERSION V1.0 SHEET 1/1 REV. X1