


版次	日期	变更内容	变更单号	变更者
1.0				

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 1A, AC, DC (AWG28)
- Withstanding voltage: 500V AC/minute
- Insulation resistance: 500M Ω min
- Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
- Contact resistance: 20m Ω max

■ HOUSING

- Poles: 2-30
- Material: Nylon 66+15% Glass Fibre, UL94V-0
- Q'TY: 1,000 pcs/reel

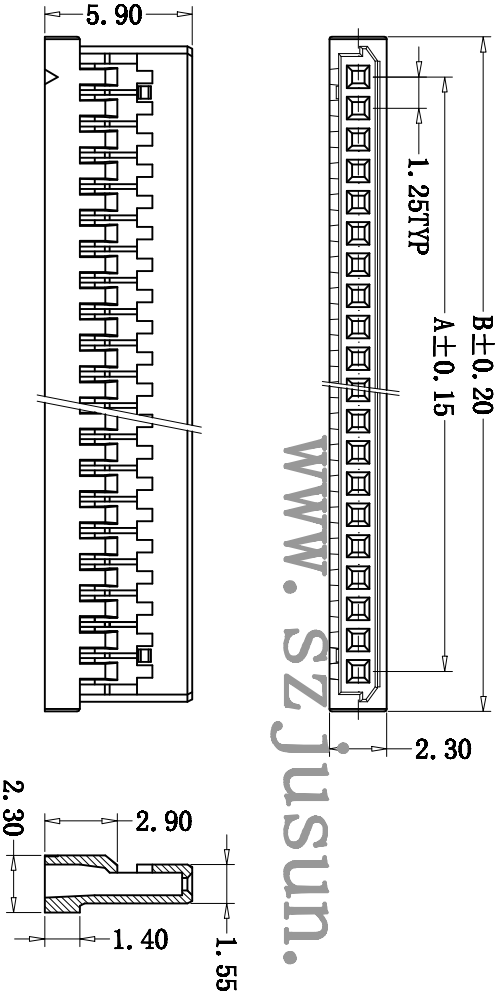

Poles	DIMENSION (mm)		Poles	DIMENSION (mm)	
	A	B		A	B
2	1.25	4.45	17	20.00	23.20
3	2.50	5.70	18	21.25	24.45
4	3.75	6.95	19	22.50	25.70
5	5.00	8.20	20	23.75	26.95
6	6.25	9.45	21	25.00	28.20
7	7.50	10.70	22	26.25	29.45
8	8.75	11.95	23	27.50	30.70
9	10.00	13.20	24	28.75	31.95
10	11.25	14.45	25	30.00	33.20
11	12.50	15.70	26	31.25	34.45
12	13.75	16.95	27	32.50	35.70
13	15.00	18.20	28	33.75	36.95
14	16.25	19.45	29	35.00	28.20
15	17.50	20.70	30	36.25	39.45
16	18.75	21.95			

				矩赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD				TITLE: DF14-nY					
L ±		L' ±		MAT'L		USE:		PART NO.:					
.X ± 0.25		.X' ±											
.XX ± 0.10		.XX' ±		FINISH		APPD:		DWG NO.:					
.XXX ±		.XXX' ±				CHKD:							
		UNITS: mm		Q'TY		DR:		SCALE 1:1		SHEET 1/1		REV. XI	