





版次	日期	变更内容	变更单号	变更者
1.0				

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 1A, AC, DC (AWG#28)
- Withstanding voltage: 500V AC/minute
- Insulation resistance: 500M Ω min
- Temperature range: -25 $^{\circ}$ C - +85 $^{\circ}$ C
- Contact resistance: 20m Ω max


■ WAFER

- Poles: 2-30
- Material: Nylon 6T, UL94V-0
- Contact: Brass, Tin plated
- Q' TY: 1,500 pcs/reel

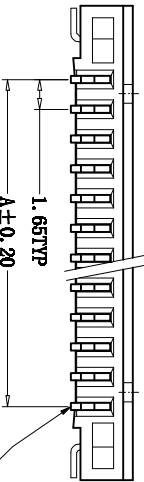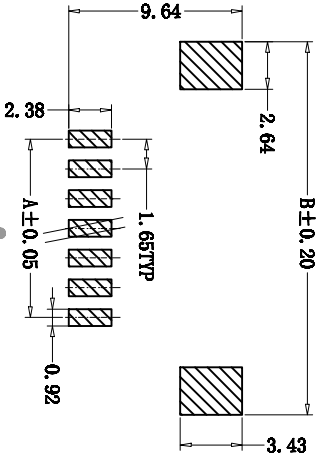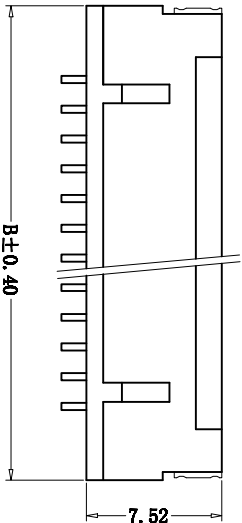

TERMINAL

Poles	DIMENSION (mm)		Poles	DIMENSION (mm)	
	A	B		A	B
2	1.25	7.45	17	20.00	26.20
3	2.50	8.70	18	21.25	27.46
4	3.75	9.95	19	22.50	28.70
5	5.00	11.20	20	23.75	29.96
6	6.25	12.45	21	25.00	31.20
7	7.50	13.70	22	26.25	32.45
8	8.75	14.95	23	27.50	33.70
9	10.00	16.20	24	28.75	34.95
10	11.25	17.45	25	30.00	36.20
11	12.50	18.70	26	31.25	37.45
12	13.75	19.95	27	32.50	38.70
13	15.00	21.20	28	33.75	39.95
14	16.25	22.45	29	35.00	41.20
15	17.50	23.70	30	36.25	42.45
16	18.75	24.95			

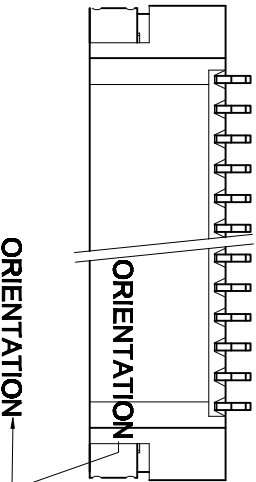

ORIENTATION

JUSUN		钜赛实业(深圳)有限公司		TITLE: DF14-NAWB	
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		USE:		PART NO.:	
L ±		MAT'L		DWG NO.:	
.X ± 0.25		APPD:		SCALE	
.XX ± 0.10		FINISH		SHEET	
.XXX ±		CHKD:		REV.	
UNITS: mm		DR:		1/1	
		Q' TY		XI	

www.szjusun.cn
Recommend PCB Layout