

www.szjusun.cn

Specifications:

Electrical

Rated Voltage: 100V AC,DC

Rated Current: 1A

Withstand Voltage: 250V AC/minute

Contact Resistance: 20mΩ (MAX.)

Insulation Resistance: 100MΩ (MIN.)

Temperature Range: -25°C~+85°C

Material and Finish:

Circuits: 02-10

Material: NYLON 66 UL94V-0

Use With: C1250TOP

Dimensional & Ordering Information:

cir- cuits	PCrt No.	Dimension mm			BAG/pcs
		A	B	C	
02	C1250H00-02	1.25	2.95	4.25	1000
03	C1250H00-03	2.50	4.20	5.50	1000
04	C1250H00-04	3.75	5.45	6.75	1000
05	C1250H00-05	5.00	6.70	8.0	1000
06	C1250H00-06	6.25	7.95	9.25	1000
07	C1250H00-07	7.50	9.20	10.50	1000
08	C1250H00-08	8.75	10.45	11.75	1000
09	C1250H00-09	10.00	11.70	13.00	1000
10	C1250H00-10	11.25	12.95	14.25	1000

PRODUCT NO.	REVISION	DATE	DESCRIPTION	UNIT: mm	 钜赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD	DRAWING	CHECKED	APPROVAL
HOUSING	A	2015.08.25		TOLERANCE :				
PART NO				.000 :±0.08				
C1250H00				.00 :±0.13				
				.0 :±0.25				

Specifications:

Electrical

Rated Voltage: 100V AC,DC

Rated Current: 1A

Withstand Voltage: 250V AC/minute




Contact Resistance: 20mΩ (MAX.)

Insulation Resistance: 100MΩ (MIN.)



Temperature Range: -25°C~+85°C

Material and Finish:

Use With:C1250H00

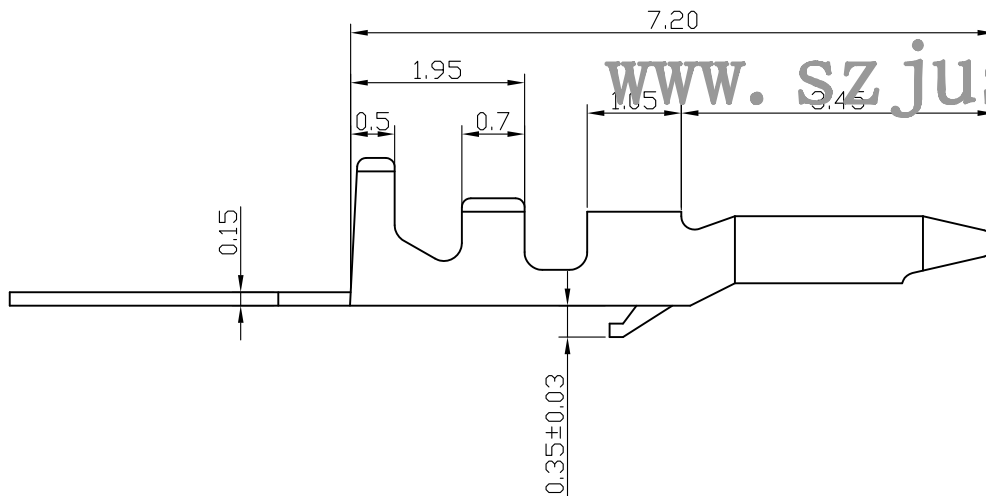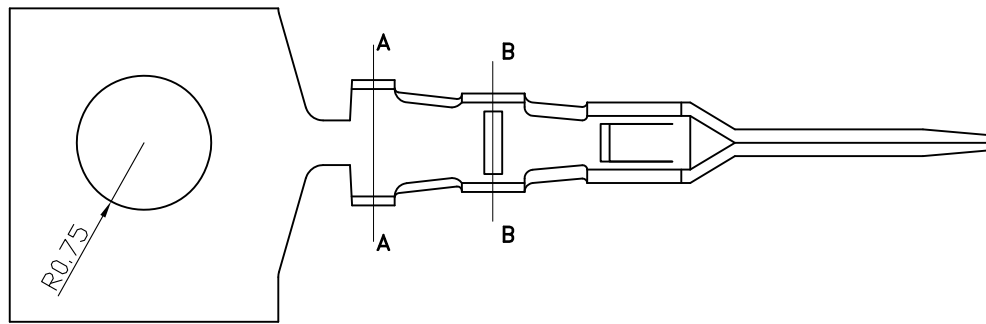

SEC:B-B



SEC:A-A

Material	Finish	Wire Range	Insulation O.D	Qty/reel
Phosphor bronze	Tin-plated	AWG#28-#32	1.2~1.05mm	15,000pcs

PRODUCT NO.	REVISION	DATE	DESCRIPTION	UNIT:mm	 钜赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD	DRAWING	CHECKED	APPROVAL
TERMINAL	A	2015.08.25		TOLERANCE:				
PART NO.				.000±0.08				
C1250TOP				.00±0.13 .0 ±0.25				