


Poles	DIM.A	DIM.B
2P	1.5	3.6
3P	3.0	5.1
4P	4.5	6.6
5P	6.0	8.1
6P	7.5	9.6
7P	9.0	11.1
8P	10.5	12.6
9P	12.0	14.1
10P	13.5	15.6
11P	15.0	17.1
12P	16.5	18.6
13P	18.0	20.1
14P	19.5	21.6
15P	21.0	23.1

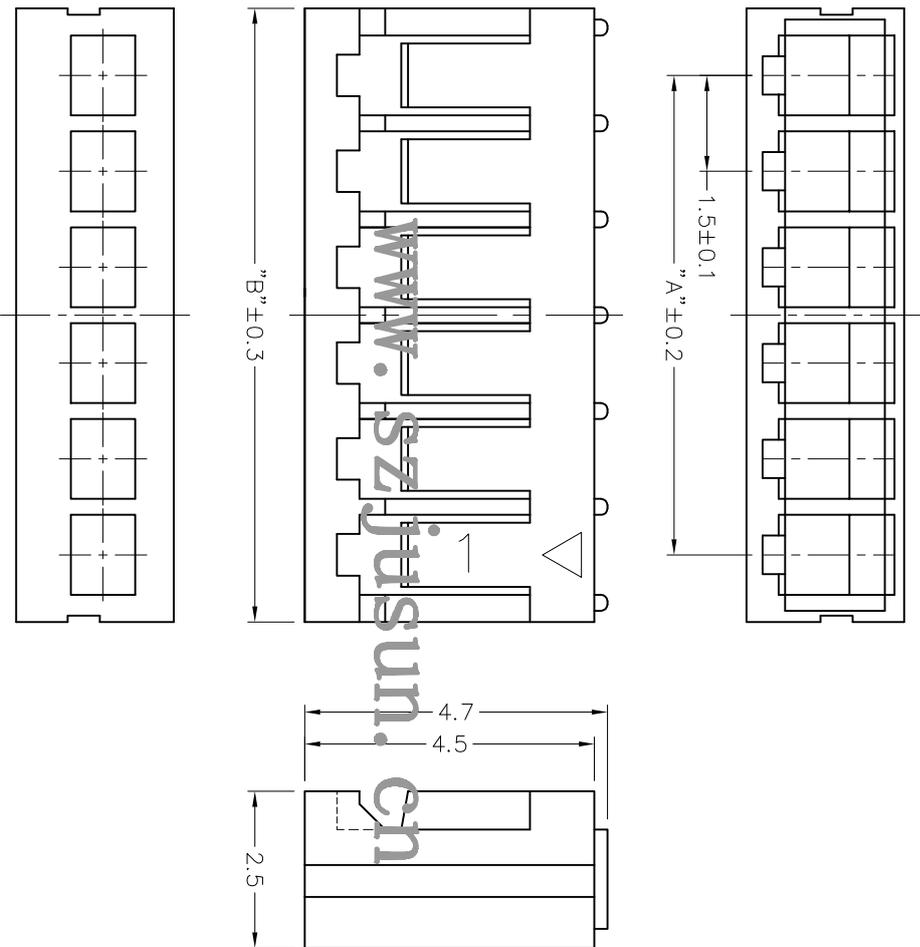

■ 技术参数 SPECIFICATIONS






- ◆ 适用线规: AWG#26~#30
Applicable Wire: AWG#26~#30
- ◆ 额定电压: 50V DC,AC(rms)
Rated voltage: 50V DC,AC(rms)
- ◆ 额定电流: 1A (AWG #26)
Rated Current: 1A (AWG #26)
- ◆ 耐压值: 500V AC/minute
Withstand voltage: 500V AC/minute.
- ◆ 工作温度: -25°C ~ +85°C
Working Temp : -25°C ~ +85°C
- ◆ 绝缘电阻: ≥500 MΩ
Insulation resistance: ≥500 MΩ
- ◆ 接触电阻: ≤5mΩ
Contact resistance: ≤5mΩ

■ 材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V2
Insulator: Nylon66, UL94-V2

		GENERAL TOLERANCE		SCALE: 9:1		DRAWN:		DATE: 2014.7.3		DOC. NO:		TITLE: 工程图		REV. A	
		XX. ±0.40		UNIT: mm	CHECK:	DATE: 2014.7.3	PARTS NO: 1.5T-5-NY(SZN)	SHEET: 1/1							
X. ±0.30															
.X ±0.25	X.° ± 2°	SIZE: A4	APPROVE:	DATE: 2014.7.3											
.XX ±0.15	.X° ± 1°														

恒泰实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

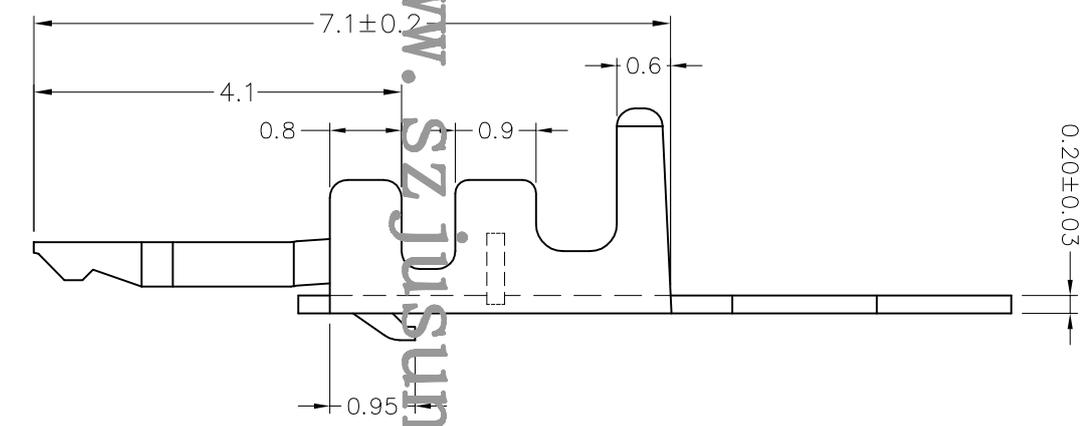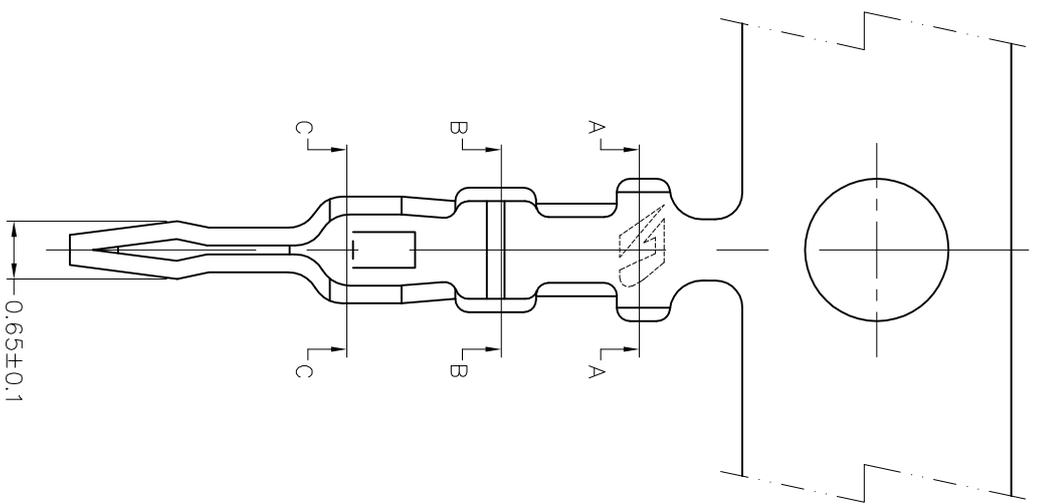

- Notes:
1. MATERIAL: PHOSPHOR BRONZE, JIS C5191R-H, HV 200±5.
 2. Finish: Tin-plating
 3. Wire range: AWG #30~#26

www.szjusun.cn

		炬森实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		GENERAL TOLERANCE XX. ±0.40 X. ±0.30 .X ±0.25 .XX ±0.15		SCALE: 12.5:1 UNIT: mm SIZE: A4		DRAWN: CHECK: APPROVE:		DATE: 2014.7.3 DATE: 2014.7.3 DATE: 2014.7.3		DOC. NO: PARTS NO: 1.5T-5-T(SZN)		TITLE: 工程图		REV. A SHEET: 1/1	
--	--	--	--	---	--	---------------------------------------	--	------------------------------	--	--	--	-------------------------------------	--	------------	--	----------------------	--