


REV	DESCRIPTION	MARK
XI	First edition	

SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1A, AC, DC (AWG#26)
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500M Ω min
- Temperature range: -25°C - +85°C
- Contact resistance: 20m Ω max

TERMINAL

- Thickness: 0.20mm
- Material: Phosphor bronze
- Wire Range: AWG#28-#32
- Q'TY: 15000 pcs/reel

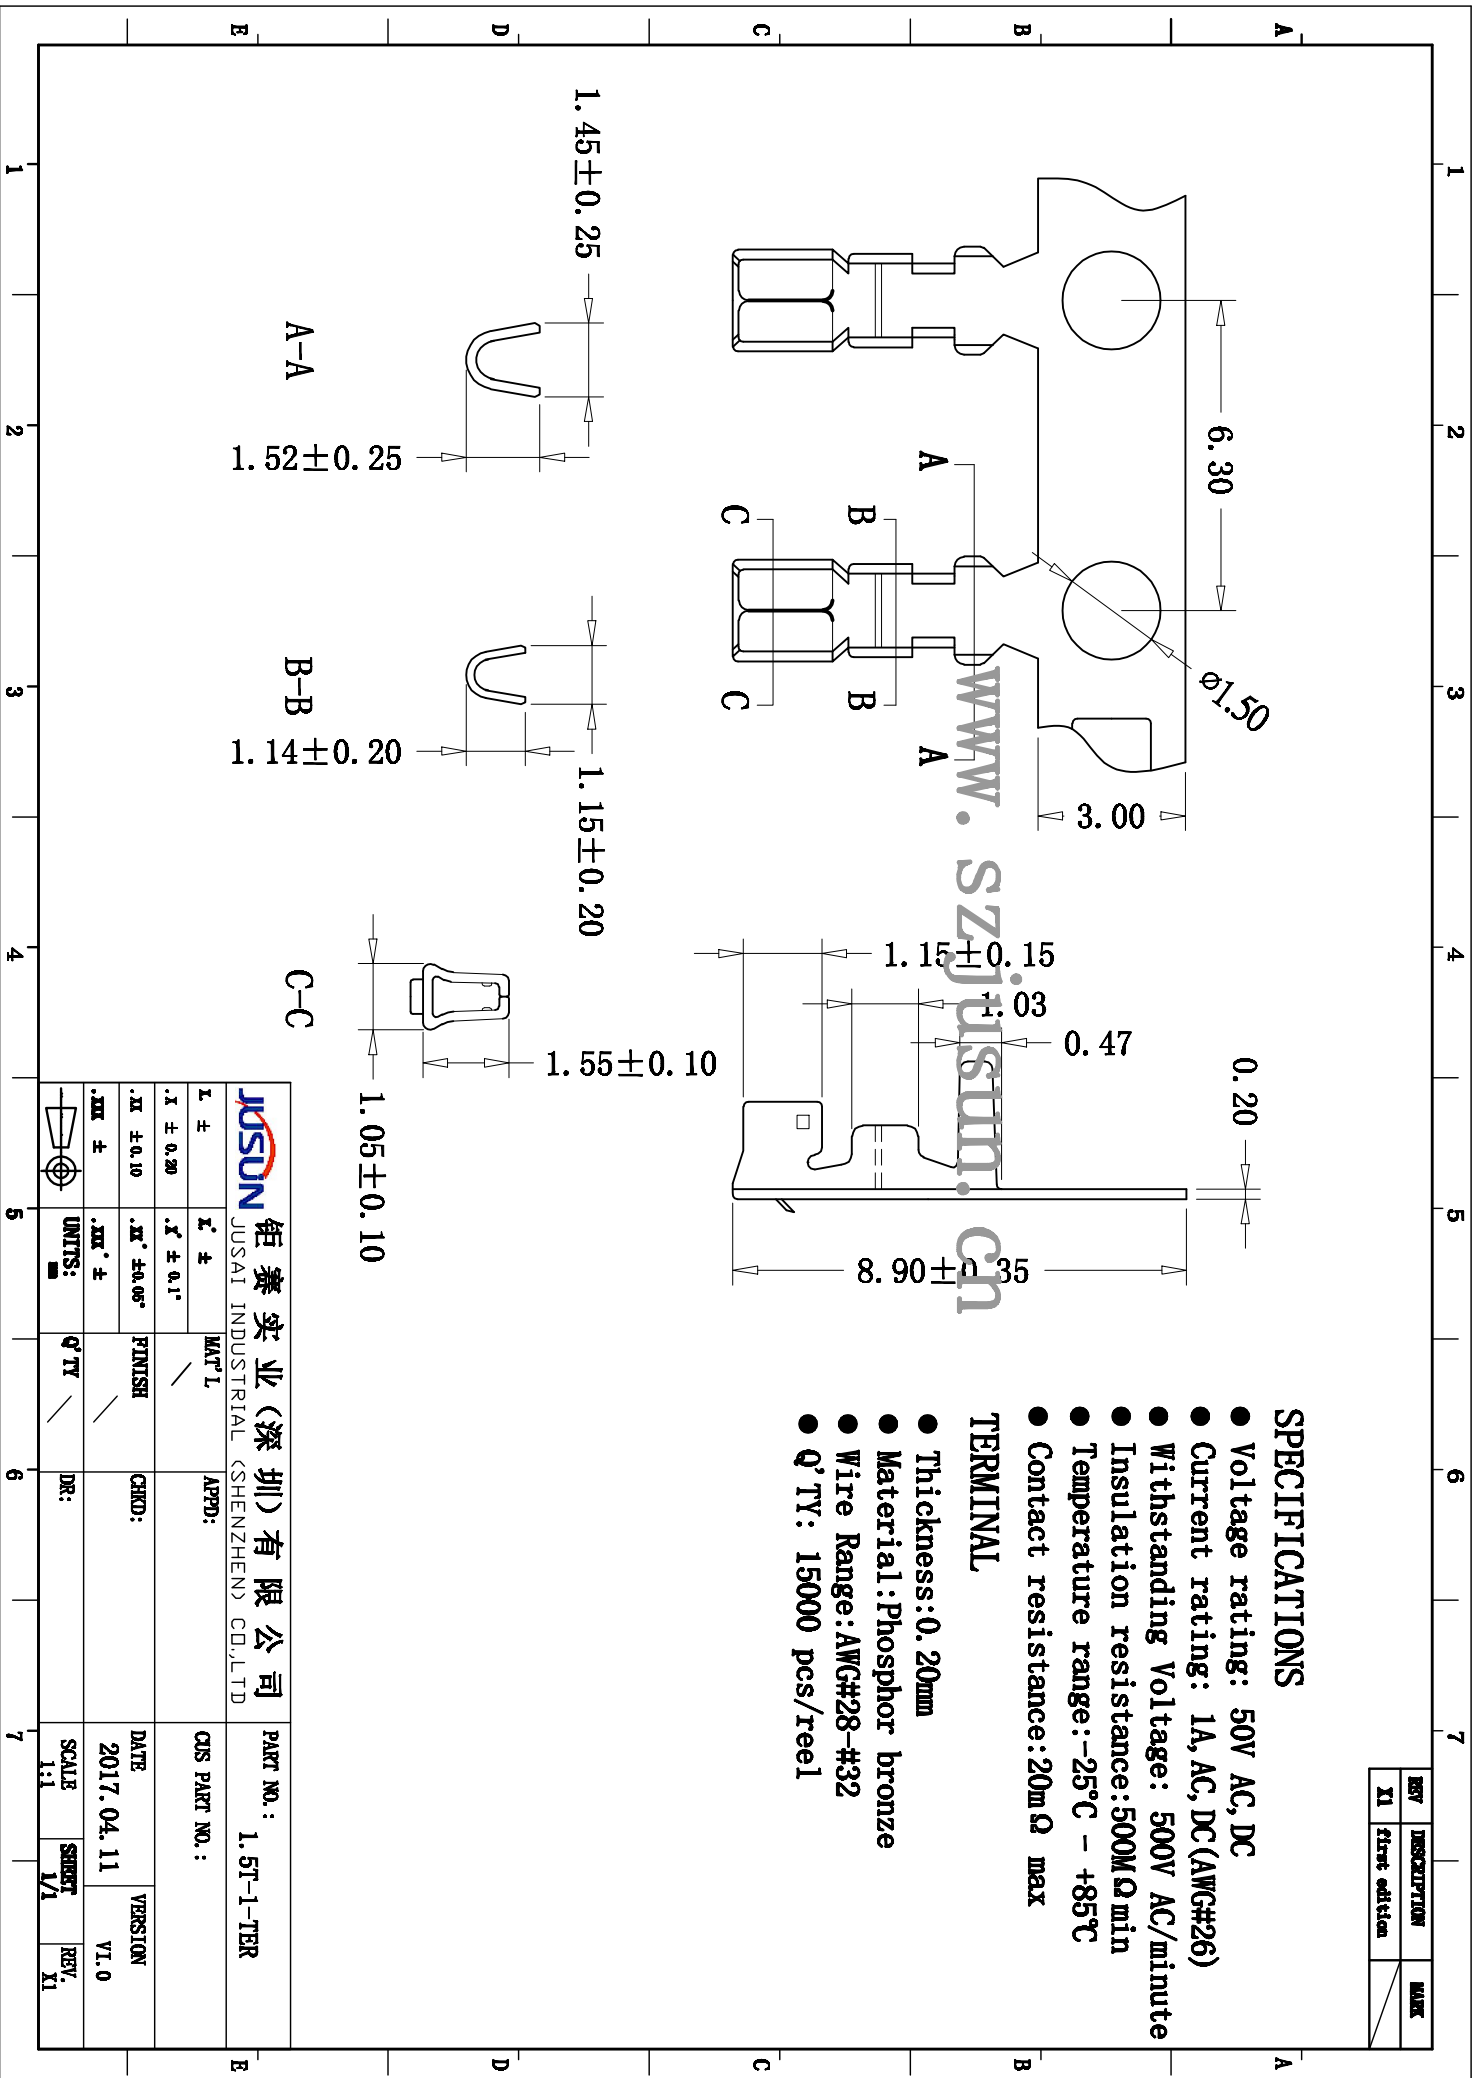

		鉅赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: 1.5T-1-TER CIS PART NO.:	
L ±	L' ±	MAT'L	APPD:	DATE	VERSION
.I ± 0.20	.I' ± 0.1'	✓		2017.04.11	VI.0
.X ± 0.10	.X' ± 0.05"	FINISH	CHKD:	SCALE	REVISION
.XX ±	.XX' ±	✓		1:1	VI.0
UNIT: mm	UNIT: mm	Q'TY	DR:	SHEET	REV.
		✓		1/1	XI