
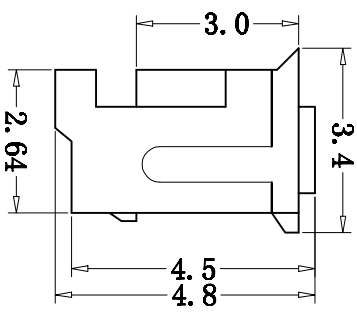
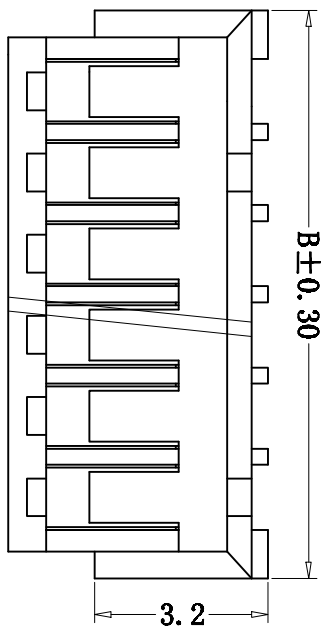


尺寸	Pin数	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P	13P	14P	15P	16P
A		1.50	3.00	4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50
B		4.50	6.00	7.50	9.00	10.50	12.00	13.50	15.00	16.50	18.00	19.50	21.00	22.50	24.00	25.50

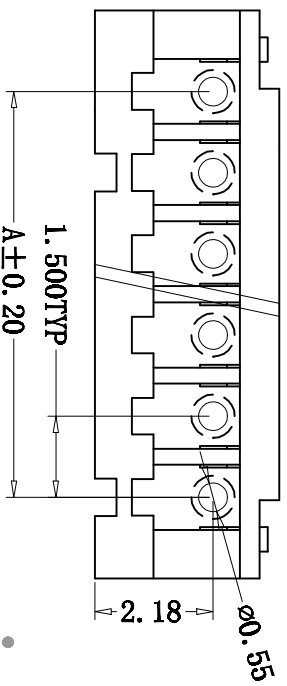

www.szjusun.cn

SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1A, AC, DC (AWG#26)
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500M Ω /min
- Temperature range: -25 - +85 $^{\circ}$ C
- Contact resistance: 20m Ω max

HOUSING

- Poles: 02-16
- Material: Nylon 66, UL94V-0
- Q'TY: 1000 pcs/bag

REV	DESCRIPTION	MARK
XI	First edition	

		钰赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: 1.5T-1-ny CIS PART NO.:	
L ±	L' ±	MAT'L	APPD:	DATE	VERSION
.1 ± 0.20	.1' ± 0.1"	/		2017.04.11	V1.0
.X ± 0.10	.X' ± 0.05"	FINISH	CHKD:	SCALE	
.XX ±	.XX' ±	/		1:1	
UNITS:	Q'TY	DR:	SHEET	REV.	
			1/1	XI	