
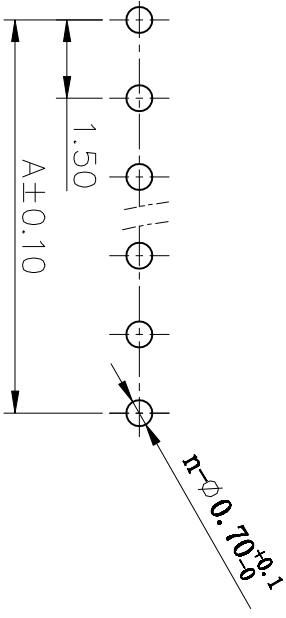
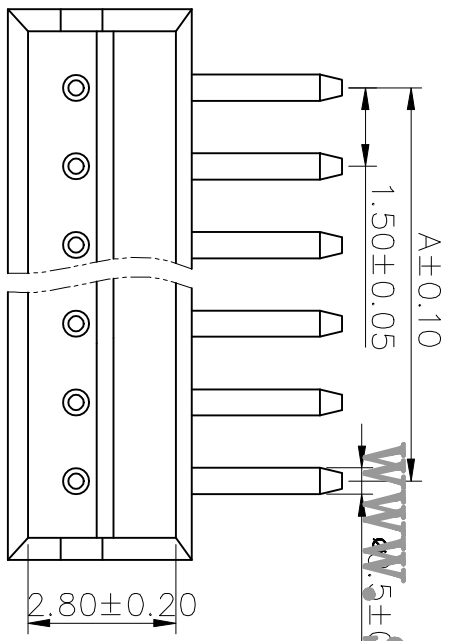
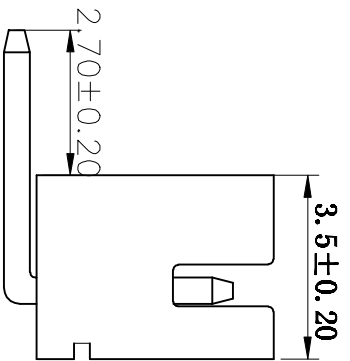


REV	DESCRIPTION	MARK
XI	First edition	

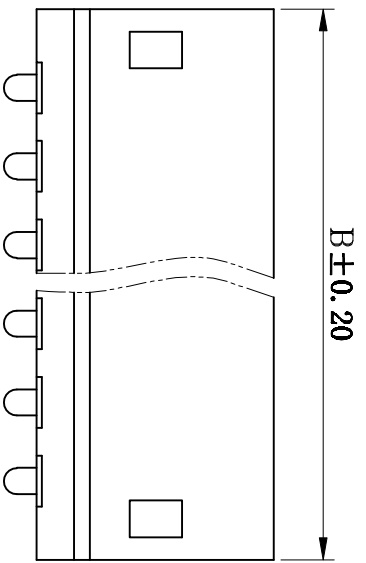

www.szjusun.cn

SPECIFICATIONS

- Voltage rating: 150V AC, DC
- Current rating: 1A, AC, DC (AWG#26)
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500M Ω/min
- Temperature range: -25 °C - +85 °C
- Contact resistance: 20mΩ

WAFER

- Poles: 02-16
- Material: Contact: Brass, Tin plated
- Base: Nylon 66, UL94V-0
- Q'TY: 1000 pcs/bag

孔位	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

		钜赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: 1.5T-1-nAW CBS PART NO.:	
L ±	L' ±	MAT'L	APPD:	DATE	VERSION
.1 ± 0.1	.1' ± 0.1'	✓		2017.05.05	VI.0
.X ± 0.05	.X' ± 0.05'	FINISH	CHRD:	SCALE	SHEET
.XX ±	.XX' ±	✓		1:1	1/1
UNIT: mm	UNIT: mm	Q'TY	DR:	SCALE	REV.
		✓		1:1	XI