

REV	DESCRIPTION	MARK
XI	First edition	




### SPECIFICATIONS

- Voltage rating: 50V AC, DC
- Current rating: 1A, AC, DC(AWG#26)
- Withstanding Voltage: 500V AC/minute
- Insulation resistance:500M  $\Omega$  min
- Temperature range:-25°C - +85°C
- Contact resistance:20m  $\Omega$  max

### WAFER

- Poles:02-16
- Material:Nylon 66, UL94V-0
- Q'TY: 1000 pcs/bag

Poles	DIMENSION(mm)	
	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

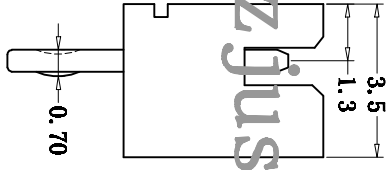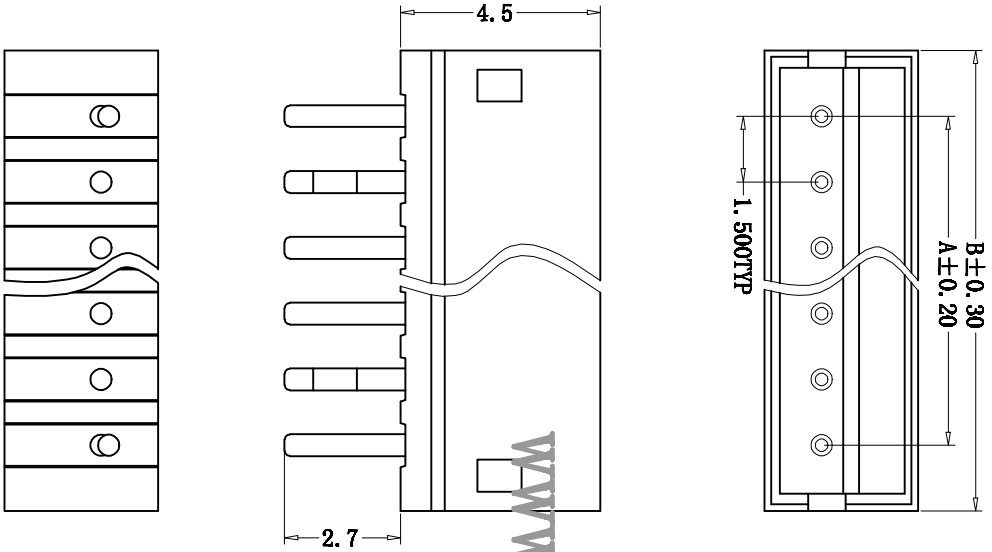

WWW.SZJUSUN.CN

**JUSUN** 钜赛实业(深圳)有限公司  
 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

<b>USE:</b>	<b>APPD:</b>	<b>CHKD:</b>	<b>DR:</b>	<b>TITLE:</b>	<b>PART NO.:</b>	<b>SCALE</b>	<b>SHEET</b>	<b>REV.</b>
<b>FINISH</b>	<b>Q'TY</b>	<b>DR:</b>	<b>1:1</b>	<b>1.5T-1-nA</b>	<b>1/1</b>	<b>1/1</b>	<b>XI</b>	