
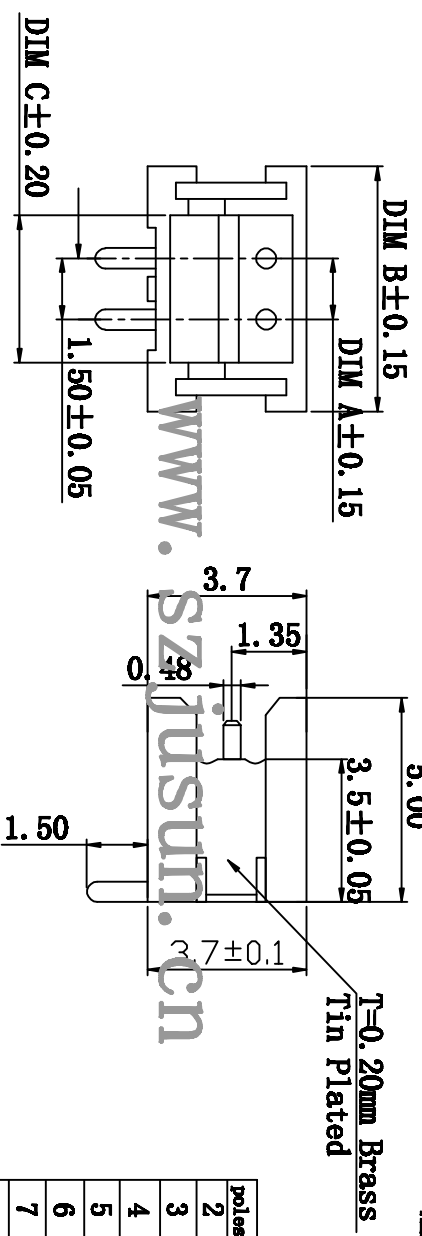



REV	DESCRIPTION	MARK
X1	First edition	

**SPECIFICATIONS:**

pitch BETWEEN poles:1.50mm  
 Current Rating:1amp AC  
 Voltage Rating:50V AC  
 Insulation Resistance:500M $\Omega$  Max.  
 Withstand Voltage:500V AC/Minute  
 Temperature Range:-25 $^{\circ}$  C to +85 $^{\circ}$  C  
 Features:  
 Available Number of circuits:2to13  
 Material:Nylon 9T UL 94V-0  
 Contact  
 Material:0.50mm(0.02 $^{\circ}$ ) Flatpin, Brass, tin plated:  
 ALL materials must be GP materials

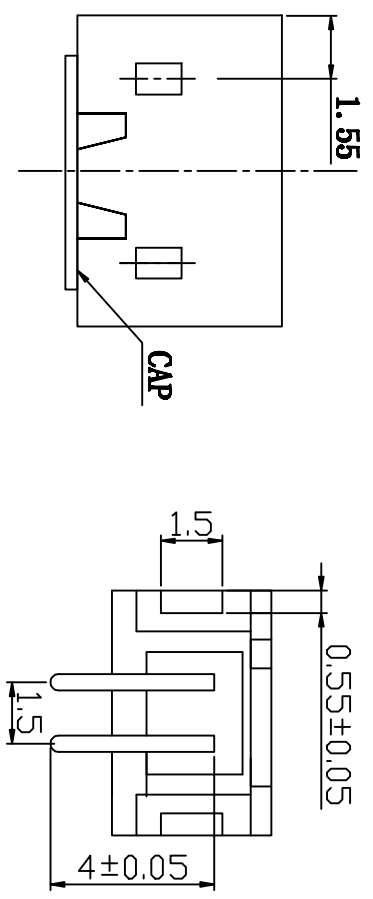

poles	DIM A	DIM B	DIM C
2	1.50	6.00	3.60
3	3.00	7.50	5.10
4	4.50	9.00	6.60
5	6.00	10.50	8.10
6	7.50	12.00	9.60
7	9.00	13.50	11.10
8	10.50	15.00	12.60
9	12.00	16.50	14.10
10	13.50	18.00	15.60
11	15.00	19.50	17.10
12	16.50	21.00	18.60
13	18.00	22.50	20.10

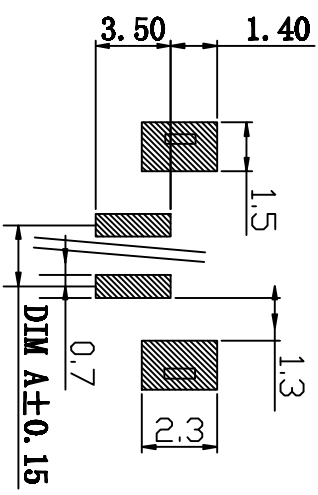

**JUSUN 钜赛实业(深圳)有限公司**  
 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

X ±	X' ±	MAT'L	APPD:	PART NO.:	1.5T-1-nAB
X ± 0.1	X' ± 0.1'	FINISH	CHKD:	CUS PART NO.:	
XX ± 0.05	XX' ± 0.05'	UNITS:	Q'TY	DR:	
XXX ±	XXX' ±	SCALE	1:1	SHEET	1/1
		DATE	2017.10.21	VERSION	V1.0
		REV.		REV.	X1