



REV	DESCRIPTION	MARK
XI	First edition	

**SPECIFICATIONS**

- Voltage rating: 250V AC,DC
- Current rating: 2A,AC,DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance:1000MΩmin
- Temperature range:-25 C TO +85°C
- Applicable PC board thickness:0.03"~0.063 (0.8mm~1.6mm)
- Contact resistance:Initial Value/10ma max After environmental Texting/20m

**HOUSING**

- Poles:2-16
- Material:Nylon 66, UL94V-0

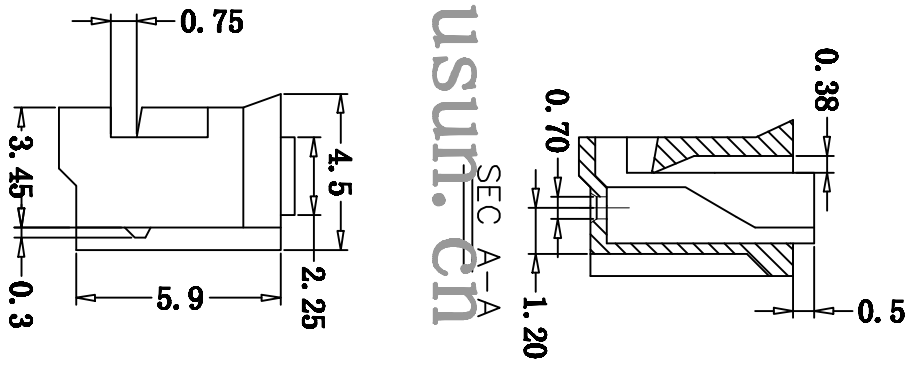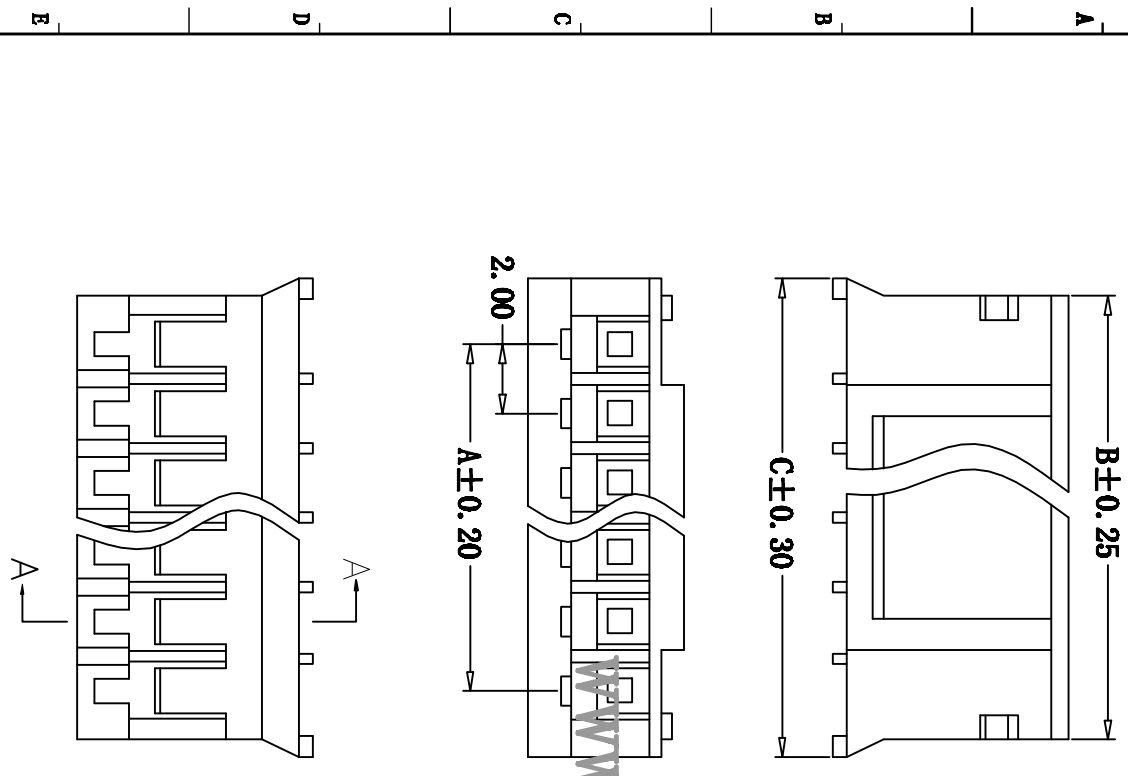

NO	PART NO	DIMENSION (mm)		
		A	B	C
2	PH-2Y	2.00	4.60	5.80
3	PH-3Y	4.00	6.60	7.80
4	PH-4Y	6.00	8.60	9.80
5	PH-5Y	8.00	10.60	11.80
6	PH-6Y	10.00	12.60	13.80
7	PH-7Y	12.00	14.60	15.80
8	PH-8Y	14.00	16.60	17.80
9	PH-9Y	16.00	18.60	19.80
10	PH-10Y	18.00	20.60	21.80
11	PH-11Y	20.00	22.60	23.80
12	PH-12Y	22.00	24.60	25.80
13	PH-13Y	24.00	26.60	27.80
14	PH-14Y	26.00	28.60	29.80
15	PH-15Y	28.00	30.60	31.80
16	PH-16Y	30.00	32.60	33.80

WWW.SZJUSUN.EN

**JUSUN** 钜赛实业(深圳)有限公司  
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: PH-nY

PART NO.: USE: MAT'L FINISH APPD: CHGD: DR: SCALE 1:1 SHEET 1/1 REV. XI

