


REV	DESCRIPTION	MARK
XI	First edition	

SPECIFICATIONS

- Voltage rating: 250V AC,DC
 - Current rating: 2A,AC,DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance:1000MΩ/min
 - Temperature range:-25C TO +85C
 - Applicable PC board thickness:0.80±0.063 (0.8mm-1.6mm)
 - Contact resistance:Initial Value/10ma max After environmental Texting/20ma
- WAFER**
- Part No: PH-nAWD
 - Poles:2-16
 - Material:Nylon 66, UL94V-0
 - QTY: 1000 pcs/bag

PIN	DIMENSION (mm)	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

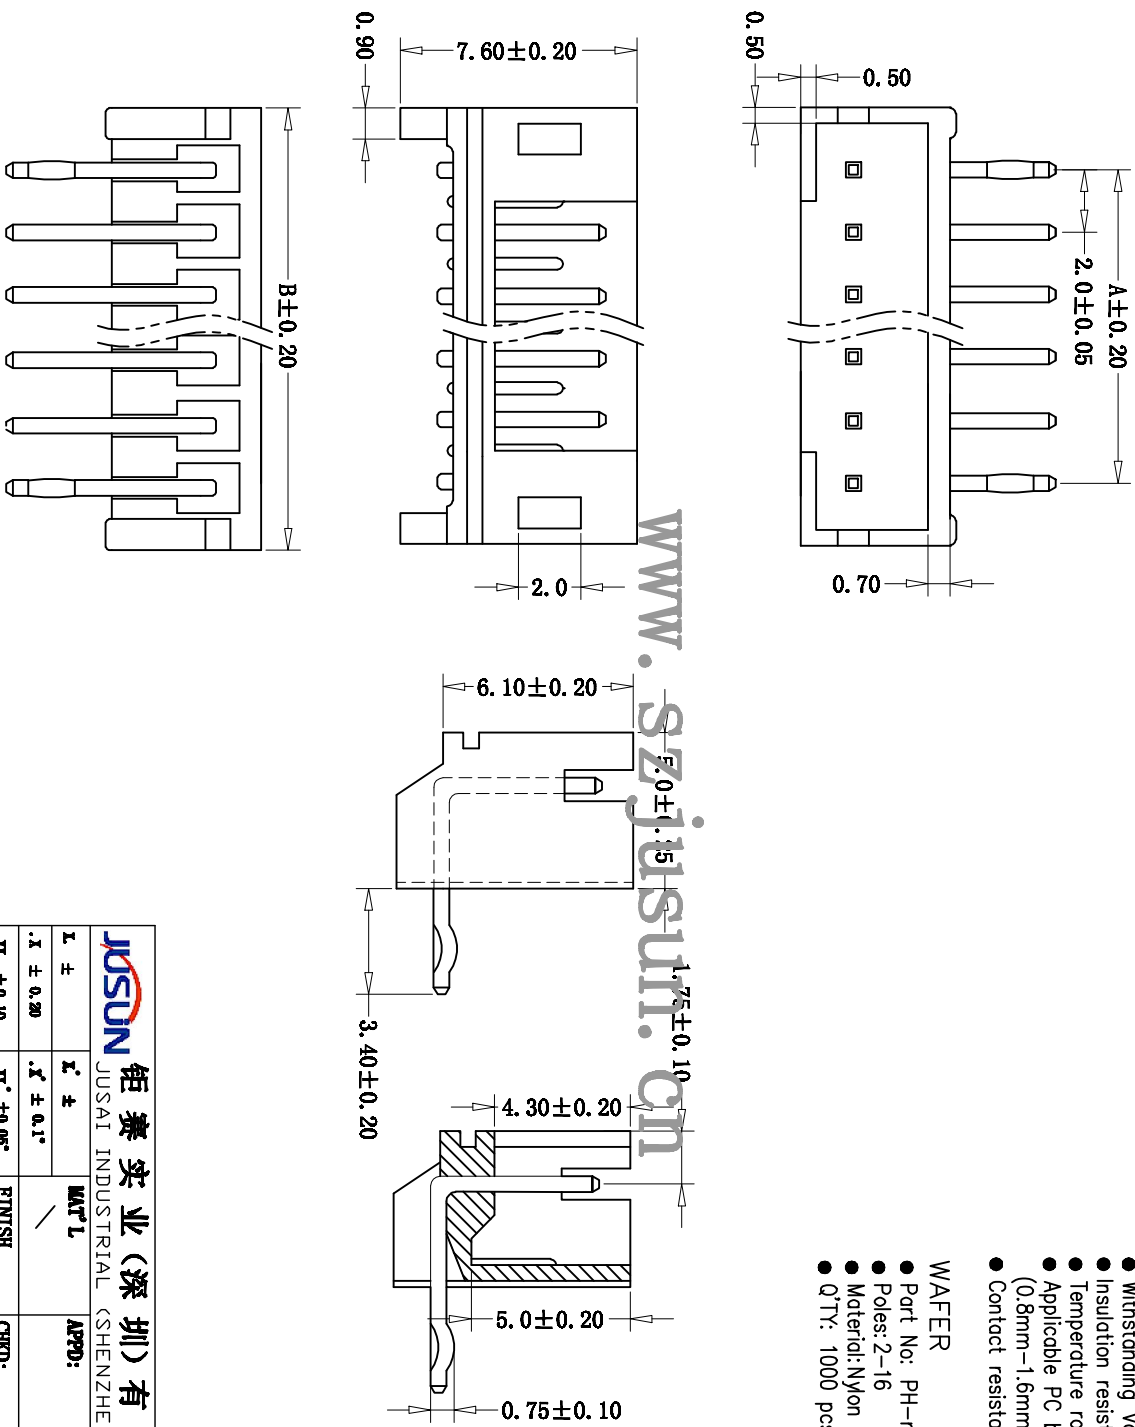

www.szjusun.cn

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

PART NO.: PH-nAWD

WAFER
MATERIAL: PH-nAWD
FINISH: CHND:
DATE: 2016.06.07
VERSION: V1.0

APPRO: DR: DR:
SCALE: 1:1
SHEET: 1/1
REV: XI

