
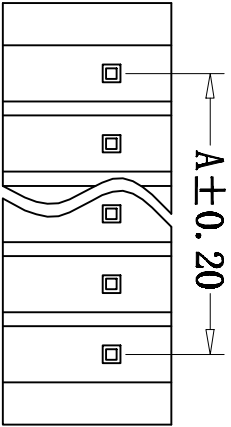


REV	DESCRIPTION	MARK
XI	First edition	

SPECIFICATIONS

- Voltage rating: 250V AC,DC
 - Current rating: 2A, AC,DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩmin
 - Temperature range: -25°C - +85°C
(including temperature rise in applying electrical current)
 - Contact resistance: 30mΩ max
- WAFER**
- Poles: 2-16
 - Material: Nylon 66, UL94V-0
Brass tin-plating
 - Q'TY: 500 ,1000 pcs/bog

PIN	DIMENSION (mm)	
	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

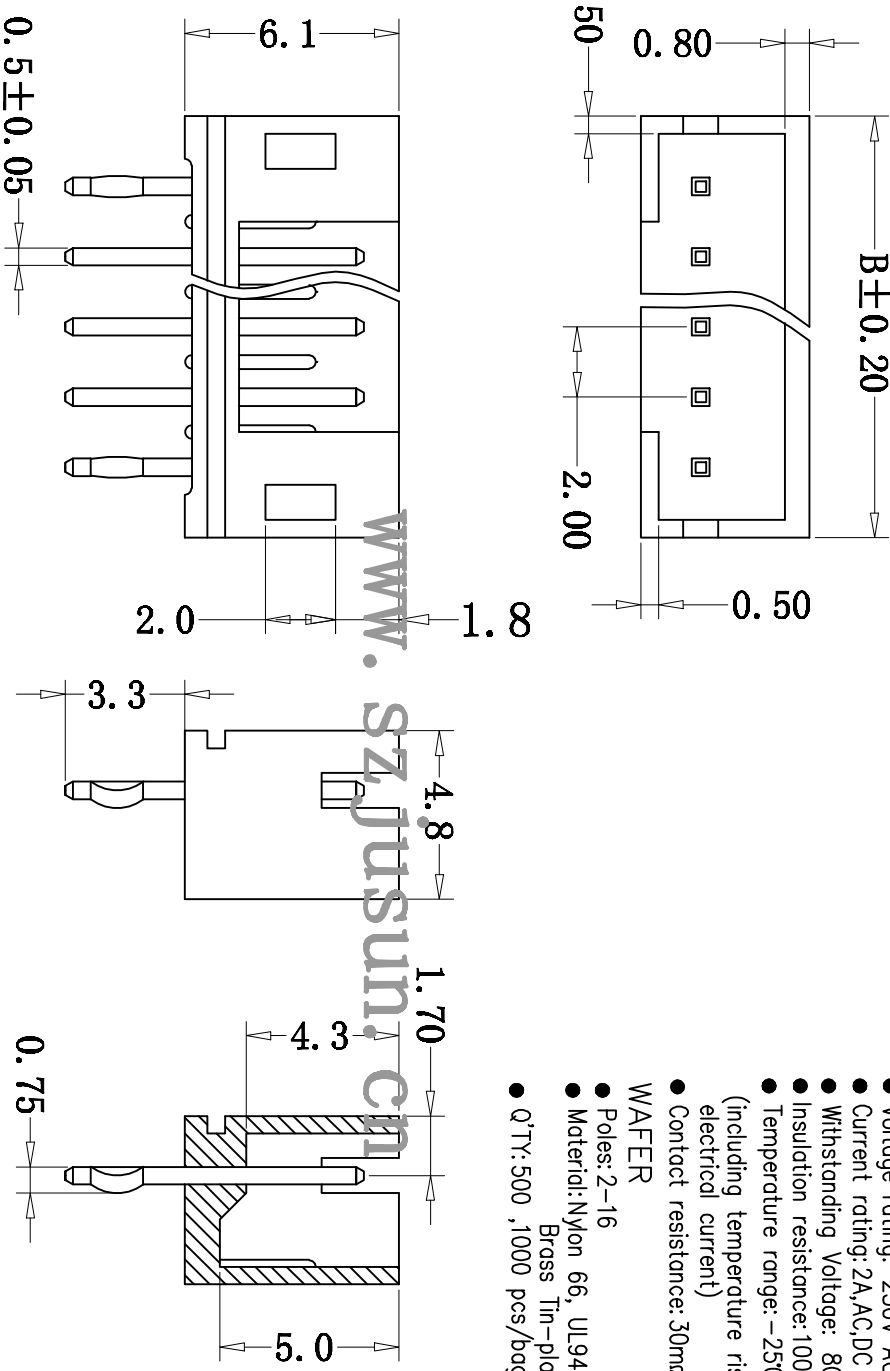

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: PH-na

USE:

PART NO.:

FINISH:

DWG NO.:

CHEKD:

SCALE

UNITS: mm

SHEET

DR:

REV.

XI