
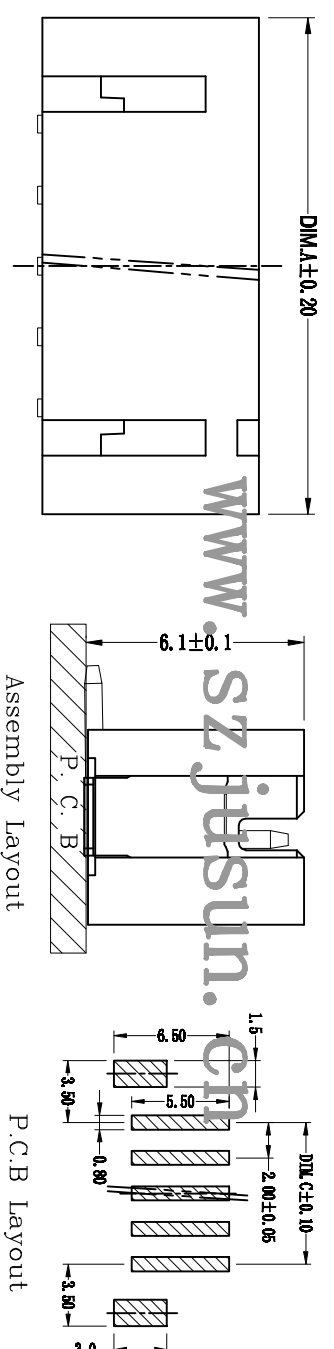


REV	DESCRIPTION	DATE
XI	First edition	

技术参数 SPECIFICATIONS

- ◆ 极数: 2\*16 Poles: 2\*16
  - ◆ 适用线规: AWG#30 #24  
Applicable: AWG#30 #24
  - ◆ 额定电压: AC, DC, 250V (有效值)  
Voltage rating: AC, DC, 250V (rms)
  - ◆ 额定电流: 2.0A AC, DC  
Current rating: 2.0A AC, DC
  - ◆ 耐压值: 800V AC/minute  
Withstand voltage: 800V AC/minute
  - ◆ 工作温度: -25℃~+85℃  
Working Temperature: -25℃~+85℃
  - ◆ 绝缘电阻: > 1000 MΩ  
Insulation resistance: > 1000 MΩ
  - ◆ 接触电阻: < 0.02 Ω  
Contact resistance: < 0.02 Ω
  - ◆ 适用印制板厚度: 0.8mm~1.6mm  
Applicable PC board thickness: 0.8mm~1.6mm
- 材料 MATERIAL
- ◆ 本体: 尼龙 U94F-0 Water:Nylon, U94F-0
  - ◆ 插针: 黄铜 PDI: Brass
  - ◆ 端子: 磷青铜 Terminal: Phosphor bronze
- 包装方式 PACKAGE
- ◆ 捆带包装 Tape and Beel Package
  - ◆ 管装 Pipe Package

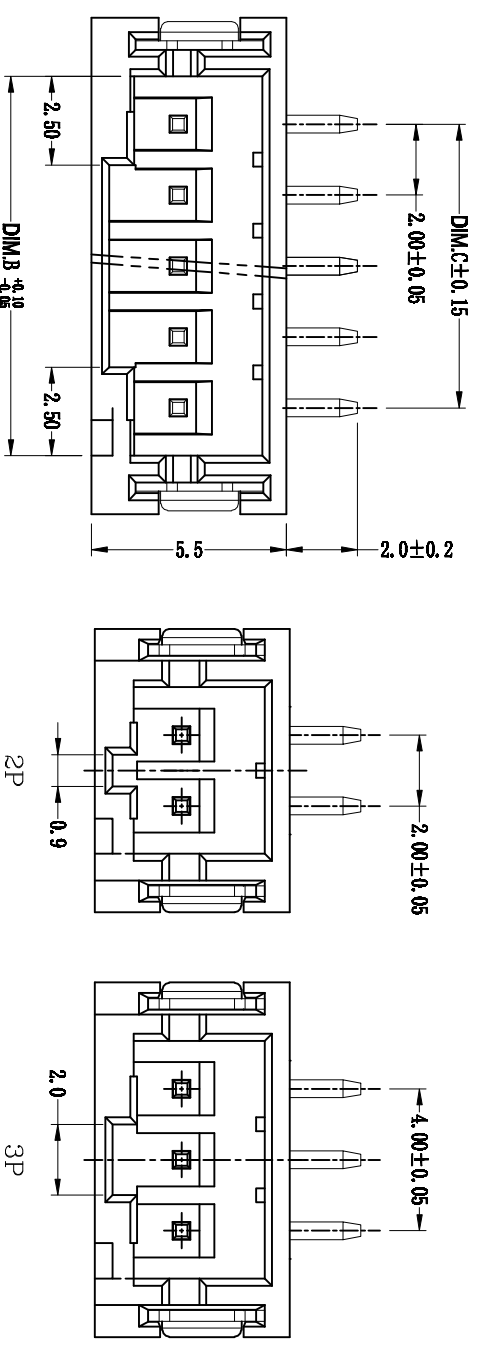

尺寸	2P	3P	4P	5P	6P	7P	8P	9P	10P	11P	12P	13P	14P	16P	18P
A	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	34.0	36.0
B	4.7	6.7	8.7	10.7	12.7	14.7	16.7	18.7	20.7	22.7	24.7	26.7	28.7	30.7	32.7
C	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0

**JUSUN** 巨赛实业(深圳)有限公司  
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: PH-nAB

USE: MAT'L

PART NO.:

FINISH

APPD:

DWG NO.:

CHEKD:

SCALE 1:1

DR: Q' TY

SHEET 1/1

REV. XI

