
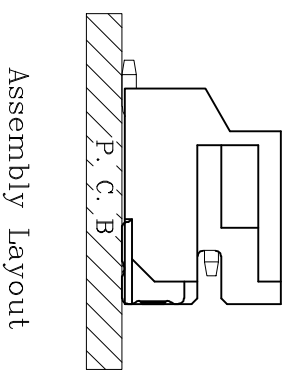
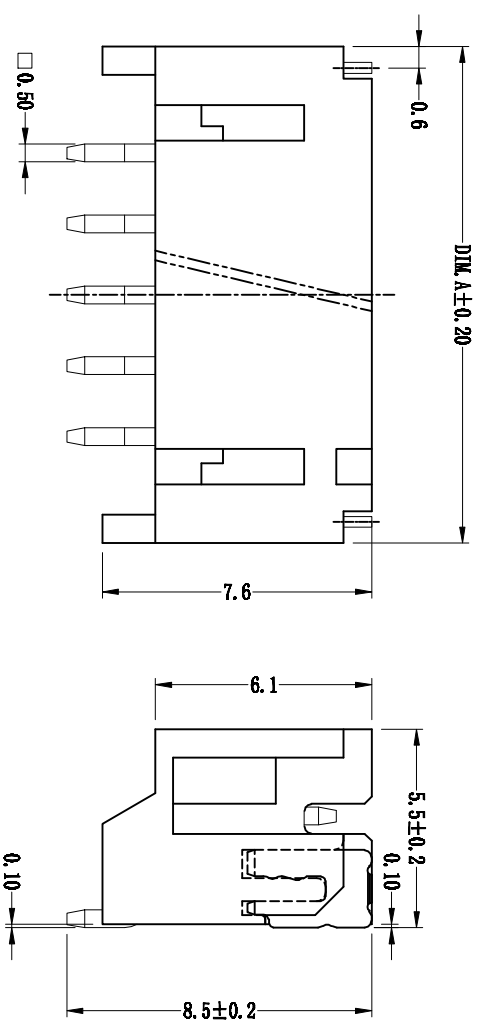


REV	DESCRIPTION	DATE
XI	First edition	

PIN	A	B	C
2P	8.0	4.7	2.0
3P	10.0	6.7	4.0
4P	12.0	8.7	6.0
5P	14.0	10.7	8.0
6P	16.0	12.7	10.0
7P	18.0	14.7	12.0
8P	20.0	16.7	14.0
9P	22.0	18.7	16.0
10P	24.0	20.7	18.0
11P	26.0	22.7	20.0
12P	28.0	24.7	22.0
13P	30.0	26.7	24.0
14P	32.0	28.7	26.0
15P	34.0	30.7	28.0
16P	36.0	32.7	30.0

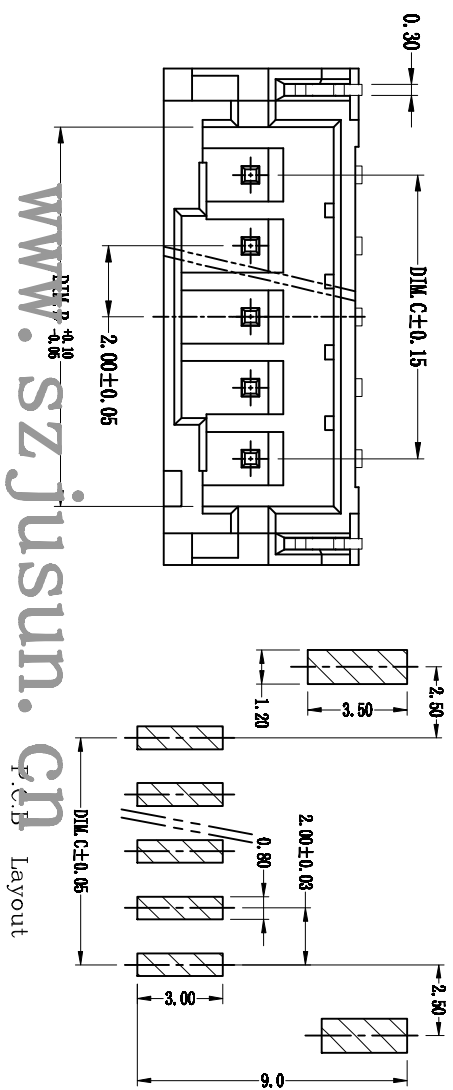

技术参数 SPECIFICATIONS

- ◆ 封装: 2\*16 Poles: 2\*16
  - ◆ 适用线规: AWG#30 #20  
Applicable: AWG#30 #20
  - ◆ 额定电压: AC, DC, 250V (有效值)  
Voltage rating: AC, DC, 250V (rms)
  - ◆ 额定电流: 2.0A AC, DC  
Current rating: 2.0A AC, DC
  - ◆ 耐压值: 800V AC/minute  
Withstand voltage: 800V AC/minute
  - ◆ 工作温度: -25°C~+85°C  
Working Temperature: -25°C~+85°C
  - ◆ 绝缘电阻: > 1000 MΩ  
Insulation resistance: > 1000 MΩ
  - ◆ 接触电阻: < 0.02 Ω  
Contact resistance: < 0.02 Ω
  - ◆ 适用印制板厚度: 0.8mm~1.6mm  
Applicable PC board thickness: 0.8mm~1.6mm
- 材料 MATERIAL
- ◆ 本体: 尼龙, UL94V-0 Vafar: Nylon, UL94V-0
  - ◆ 零件: 黄铜 PDI: Brass
  - ◆ 端子: 磷青铜 Terminal: Phosphor bronze
- 包装方式 PACKAGE
- ◆ 卷带包装 Tape and Reel Package
  - ◆ 管装 Pipe Package

<b>钰赛实业(深圳)有限公司</b> JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		<b>TITLE:</b> PH-nAWB	
<b>PART NO.:</b>	<b>USE:</b>	<b>PART NO.:</b>	<b>USE:</b>
<b>FINISH:</b>	<b>APPD:</b>	<b>FINISH:</b>	<b>APPD:</b>
<b>CHEK:</b>	<b>DR:</b>	<b>CHEK:</b>	<b>DR:</b>
<b>SCALE:</b> 1:1	<b>SHEET:</b> 1/1	<b>SCALE:</b> 1:1	<b>SHEET:</b> 1/1
<b>REV.:</b> XI		<b>REV.:</b> XI	