


| REV | DESCRIPTION | MARK |
|-----|---------------|------|
| X1 | First edition | |

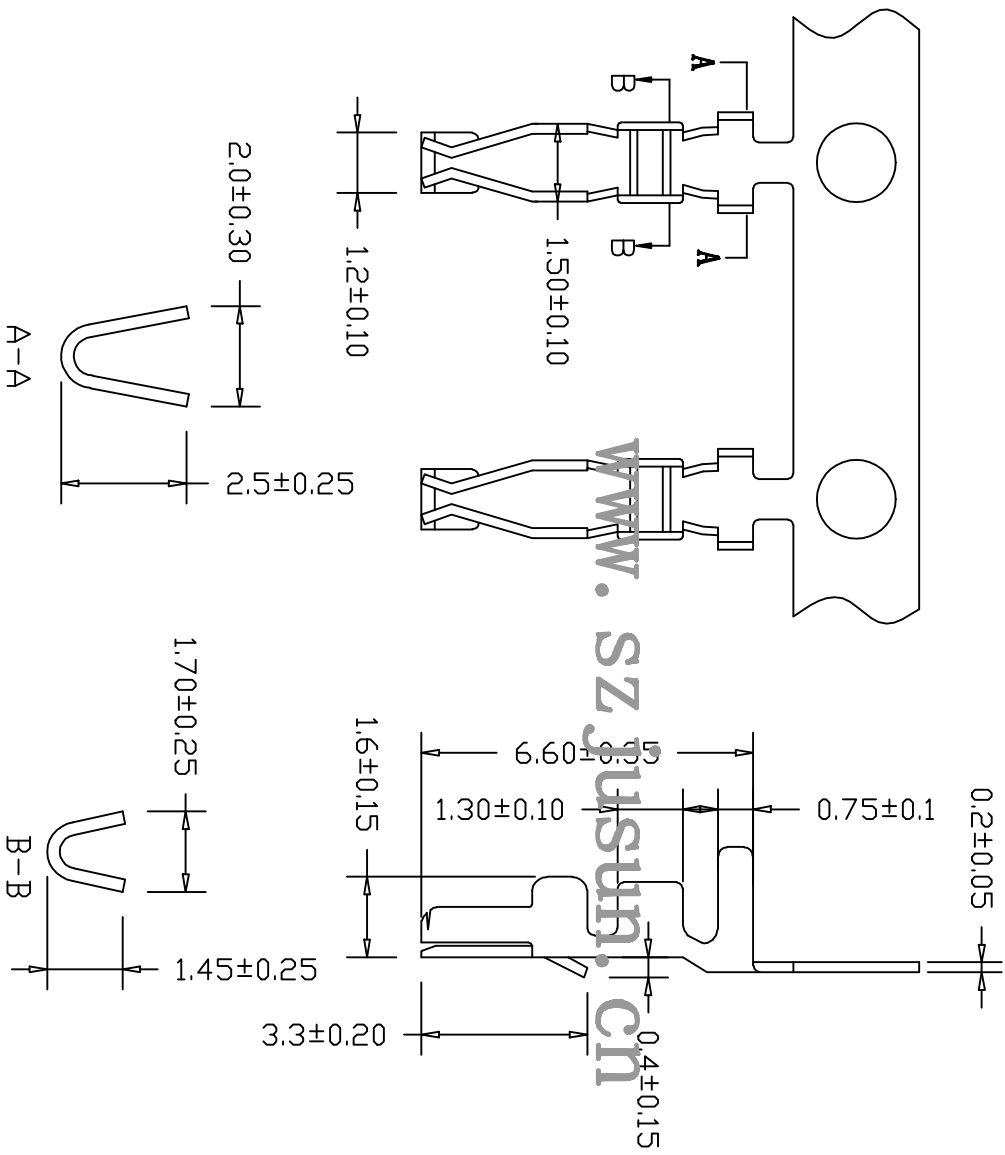

■ SPECIFICATIONS

- Voltage Rating: 250V AC/DC
- Current Rating: 3A AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation Resistance: 1,000MΩ min.
- Temperature Range: -25°C to +85°C
- Contact Resistance: 20mΩ max

■ TERMINAL

- Wire Range: AWG#22-#28
- Material: Phos. Bronze
- Finish: Tin Plated
- Thickness: 0.2mm
- Q'TY: 10,000PCS/Reel

| | | | |
|--|-----------|-----------------------------|-------|
| 巨赛实业(深圳)有限公司 JUSUN INDUSTRIAL (SHENZHEN) CO.,LTD | | PHD-TER PART NO.: | |
| X ± | X' ± | MAT'L | USE: |
| X ± 0.2 | X' ± | | |
| XX ± 0.1 | XX' ± | FINISH | APPD: |
| XXX ± | XXX' ± | | CHKD: |
| | UNITS: mm | Q'TY | DR: |
| SCALE 1:1 | SHEET 1/1 | REV. X1 | |