
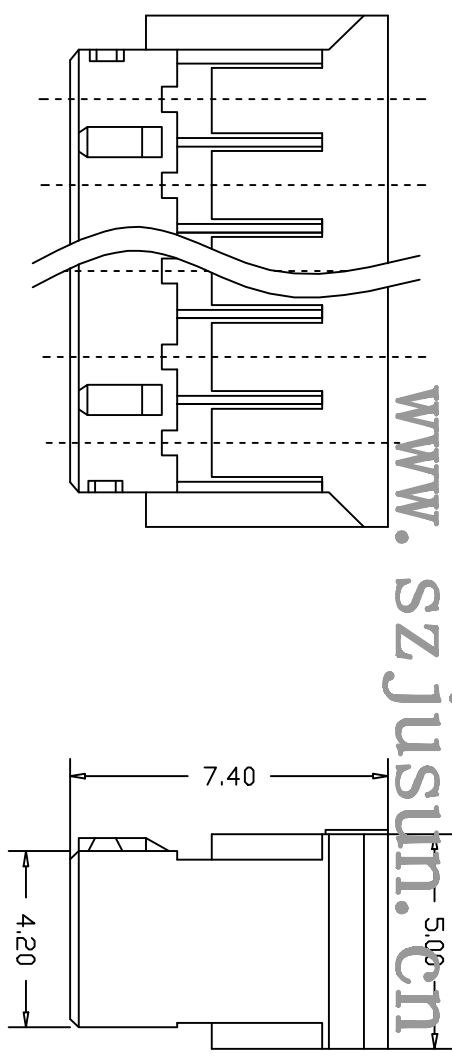


REV	DESCRIPTION	MARK
X1	First edition	

■ SPECIFICATIONS

- Voltage Rating: 250V AC/DC
- Current rating: 3A AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1,000M Ω min
- Temperature range: -25 $^{\circ}$ C to +85 $^{\circ}$ C
- Contact Resistance: 20m Ω max
- HOUSING
- Poles: 03x2-16x2
- Material: Nylon 66 UL94V-0
- Q`TY: 500/1,000 pcs/Tape & bag

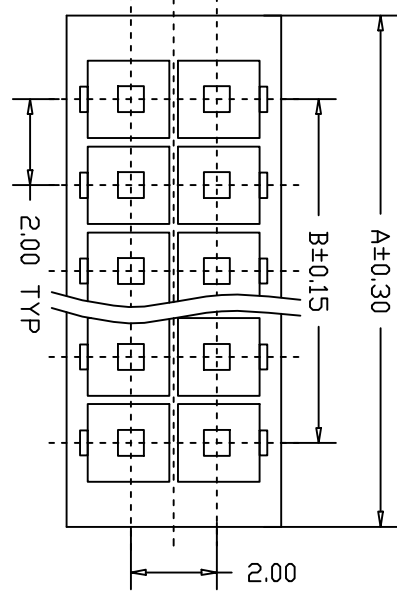

No. of Contacts	DIMENSIONS	
	DIM A	DIM B
2X3Y	7.90	4.00
2X4Y	9.90	6.00
2X5Y	11.90	8.00
2X6Y	13.90	10.00
2X7Y	15.90	12.00
2X8Y	17.90	14.00
2X9Y	19.90	16.00
2X10Y	21.90	18.00
2X11Y	23.90	20.00
2X12Y	25.90	22.00
2X13Y	27.90	24.00
2X14Y	29.90	26.00
2X15Y	31.90	28.00
2X16Y	33.90	30.00

www.szjusun.com

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: **PHD-2XnY**

MAT'L: USE: PART NO.:

X ± X' ± APPD: DWG NO.:

XX ± 0.1 XX' ± FINISH CHKD: SCALE 1/1 SHEET 1/1 REV. X1

XXX ± XXX' ± UNITS: DR: Q'TY MARK

UNIT: mm