


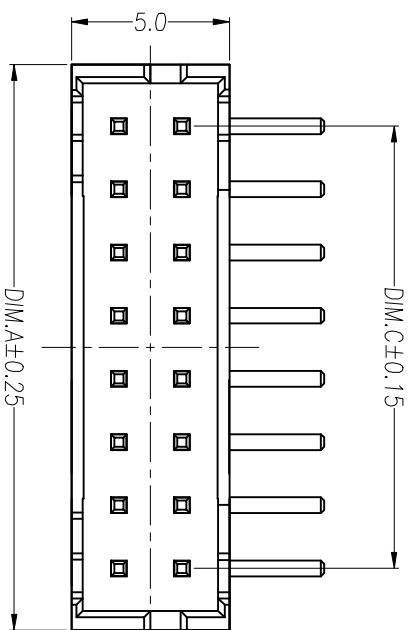


No. of Contacts	DIMENSIONS		
	DIM A	DIM B	DIM C
2X2A	5.90	/	2.00
2X3A	7.90	2.00	4.00
2X4A	9.90	4.00	6.00
2X5A	11.90	6.00	8.00
2X6A	13.90	8.00	10.00
2X7A	15.90	10.00	12.00
2X8A	17.90	12.00	14.00
2X9A	19.90	14.00	16.00
2X10A	21.90	16.00	18.00
2X11A	23.90	18.00	20.00
2X12A	25.90	20.00	22.00
2X13A	27.90	22.00	24.00
2X14A	29.90	24.00	26.00
2X15A	31.90	26.00	28.00
2X16A	33.90	28.00	30.00
2X17A	35.90	30.00	32.00

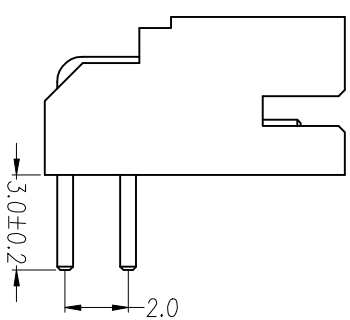

P.C.B. Layout

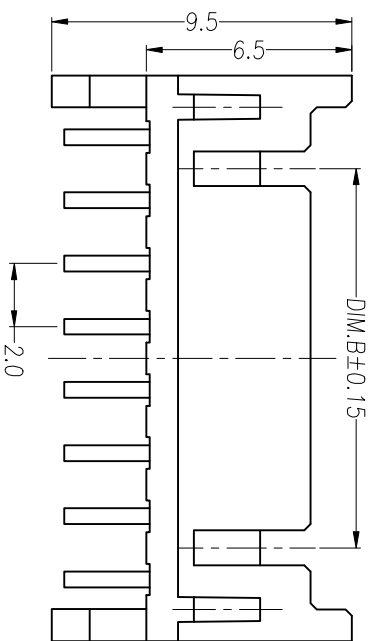

www.szjusun.cn

技术参数 SPECIFICATIONS

- ◆ 间距: 2.0 PITCH
 - ◆ 线数: 4-34 Poles: 4-34
 - ◆ 适用线径: AWG#24 ~ #28
 - ◆ Applicable wires: AWG#24 ~ #28
 - ◆ 额定电压: 250V DC/AC(有效值)
 - ◆ Voltage rating: 250V DV/AC(rms)
 - ◆ 额定电流: 2.0A
 - ◆ Current rating: 2.0A
 - ◆ 耐压值: 800V AC(有效值)
 - ◆ Withstand voltage: 800V AC(rms)
 - ◆ 工作温度: -25℃ ~ +85℃
 - ◆ Working Temperature: -25℃ ~ +85℃
 - ◆ 绝缘电阻: > 1000 MΩ
 - ◆ Insulation resistance: > 1000 MΩ
 - ◆ 接触电阻: < 0.02 Ω
 - ◆ Contact resistance: < 0.02 Ω
 - ◆ 适用印刷板厚度: 0.8MM ~ 1.6MM
 - ◆ Applicable PC board thickness: 0.8mm ~ 1.6mm
- 接触件 (TERMINAL)
- ◆ P/N: 黄铜
 - ◆ PIN Material: Brass
 - ◆ 塑胶本体 (HOUSING)
 - ◆ 材质: 尼龙46, UL 94V-0
 - ◆ Material: Nylon46, UL94-0
- 包装方式 PACKAGE
- ◆ 袋装 Bag Package

REV	DESCRIPTION	DATE
XI	first edition	

		钜赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: PHD-2X1AWD	
USE: MAT'L		APPD: FINISH		PART NO.:	
CHKD:		Q'TY		DR:	
SCALE 1:1		SHEET 1/1		REV. XI	