




REV	DESCRIPTION	MARK
XI	First edition	

Part No.	A	B	C
2AV	2.0	4.75	6.0
3AV	4.0	6.75	8.0
4AV	6.0	8.75	10.0
5AV	8.0	10.75	12.0
6AV	10.0	12.75	14.0
7AV	12.0	14.75	16.0
8AV	14.0	16.75	18.0
9AV	16.0	18.75	20.0
10AV	18.0	20.75	22.0
11AV	20.0	22.75	24.0
12AV	22.0	24.75	26.0
13AV	24.0	26.75	28.0
14AV	26.0	28.75	30.0
15AV	28.0	30.75	32.0
16AV	30.0	32.75	34.0

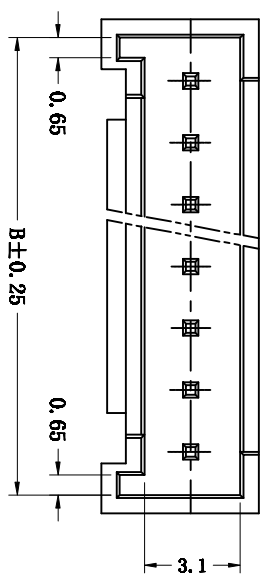

P.C.B. Layout

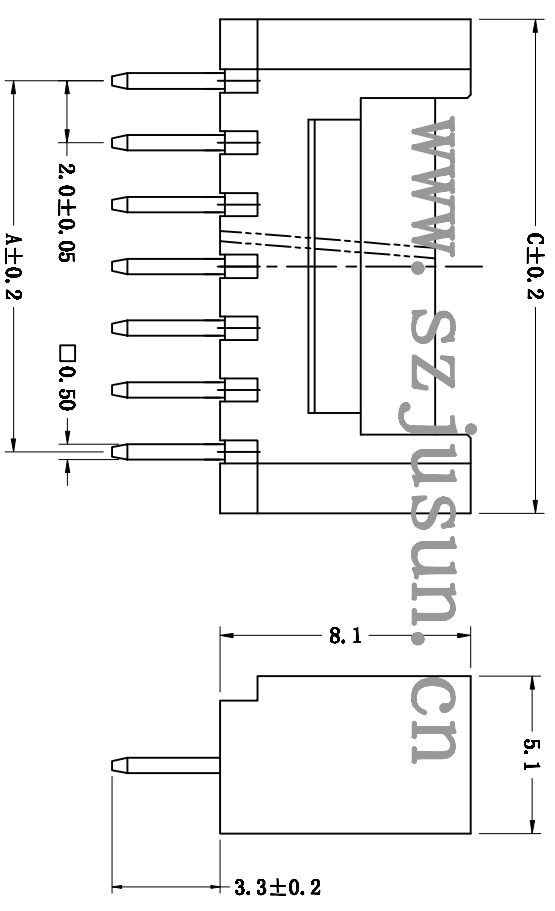

技术参数 SPECIFICATIONS

- ◆ 板数: 2\*16 Poles: 2\*16
- ◆ 适用标准: AMS32 #28
- ◆ Applicable: AMS32 #28
- ◆ 额定电压: AC, DC, 100V (有效值)
- ◆ Voltage rating: AC, DC, 100V (rms)
- ◆ 额定电流: 1.0A, AC, DC
- ◆ Current rating: 1.0A, AC, DC
- ◆ 耐压值: 800V AC/minute
- ◆ Withstand voltage: 800V AC/minute
- ◆ 工作温度: -25°C~+85°C
- ◆ Working Temperature: -25°C~+85°C
- ◆ 绝缘电阻: > 500 MΩ
- ◆ Insulation resistance: > 500 MΩ
- ◆ 接触电阻: < 0.02 Ω
- ◆ Contact resistance: < 0.02 Ω
- ◆ 适用印制板厚度: 0.8mm
- ◆ Applicable PC board thickness: 0.8mm

材料 MATERIAL

- ◆ 本体: 尼龙66, (白色) UL94V-0  
Wafer: Nylon, (White) UL94V-0
- ◆ 焊料: 共银 (厚度50~60 μ, 锡层厚100~120 μ)
- ◆ 端子: 磷青铜 Terminal: Phosphor bronze

包装方式 PACKAGE

- ◆ 袋装 Bag Package
- ◆ 管装 Pipe Package

**JUSUN** 巨赛实业(深圳)有限公司  
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: PHS-na

USE: MAT'L

FINISH

DR: DR:

L ±	L' ±	MAT'L	USE:	TITLE:
.I ± 0.30	.I' ±			PHS-na
.X ± 0.10	.X' ±	FINISH	APPD:	
.XX ±	.XX' ±		CHKD:	
UNITS: mm	UNITS: mm	Q'TY	DR:	
SCALE 1:1	SHEET 1/1	REV. XI		