
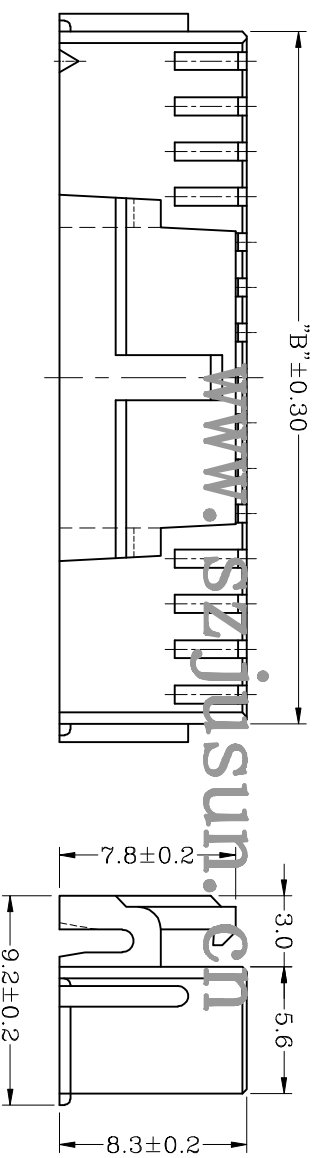


	2x3P	2x4P	2x5P	2x6P	2x7P	2x8P	2x9P	2x10P	2x11P	2x12P	2x13P	2x14P	2x15P	2x16P	2x17P	2x18P	2x19P	2x20P	2x30P
A	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	34.0	36.0	38.0	58.0
B	6.6	8.6	10.6	12.6	14.6	16.6	18.6	20.6	22.6	24.6	26.6	28.6	30.6	32.6	34.6	36.6	38.6	40.6	60.6

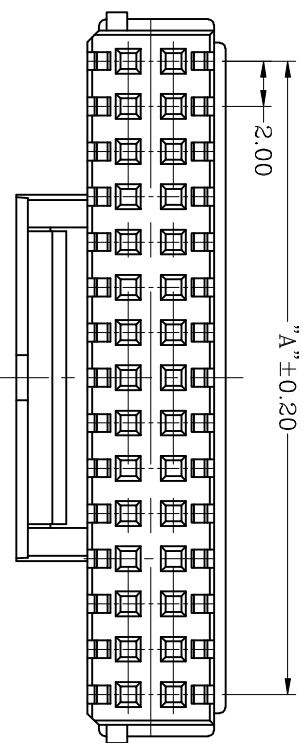

技术参数 SPECIFICATIONS


- ◆ 极数: 12~60 Poles: 12~60
- ◆ 额定电压: AC, DC, 250V Rated voltage: AC, DC, 250V
- ◆ 额定电流: 3.0A AC, DC Rated Current: 3.0A AC, DC
- ◆ 耐压值: 1000V AC/minute Withstand voltage: 1000V AC/minute
- ◆ 工作温度: -25° C ~ +85° C Working Temperature: -25° C ~ +85° C
- ◆ 绝缘电阻: ≥1000 MΩ Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤30mΩ Contact resistance: ≤30mΩ

材料 MATERIAL

- ◆ 塑胶: 尼龙66 (Nylom66), UL94V-0

包装方式 PACKAGE

- ◆ 袋装 Bag Package

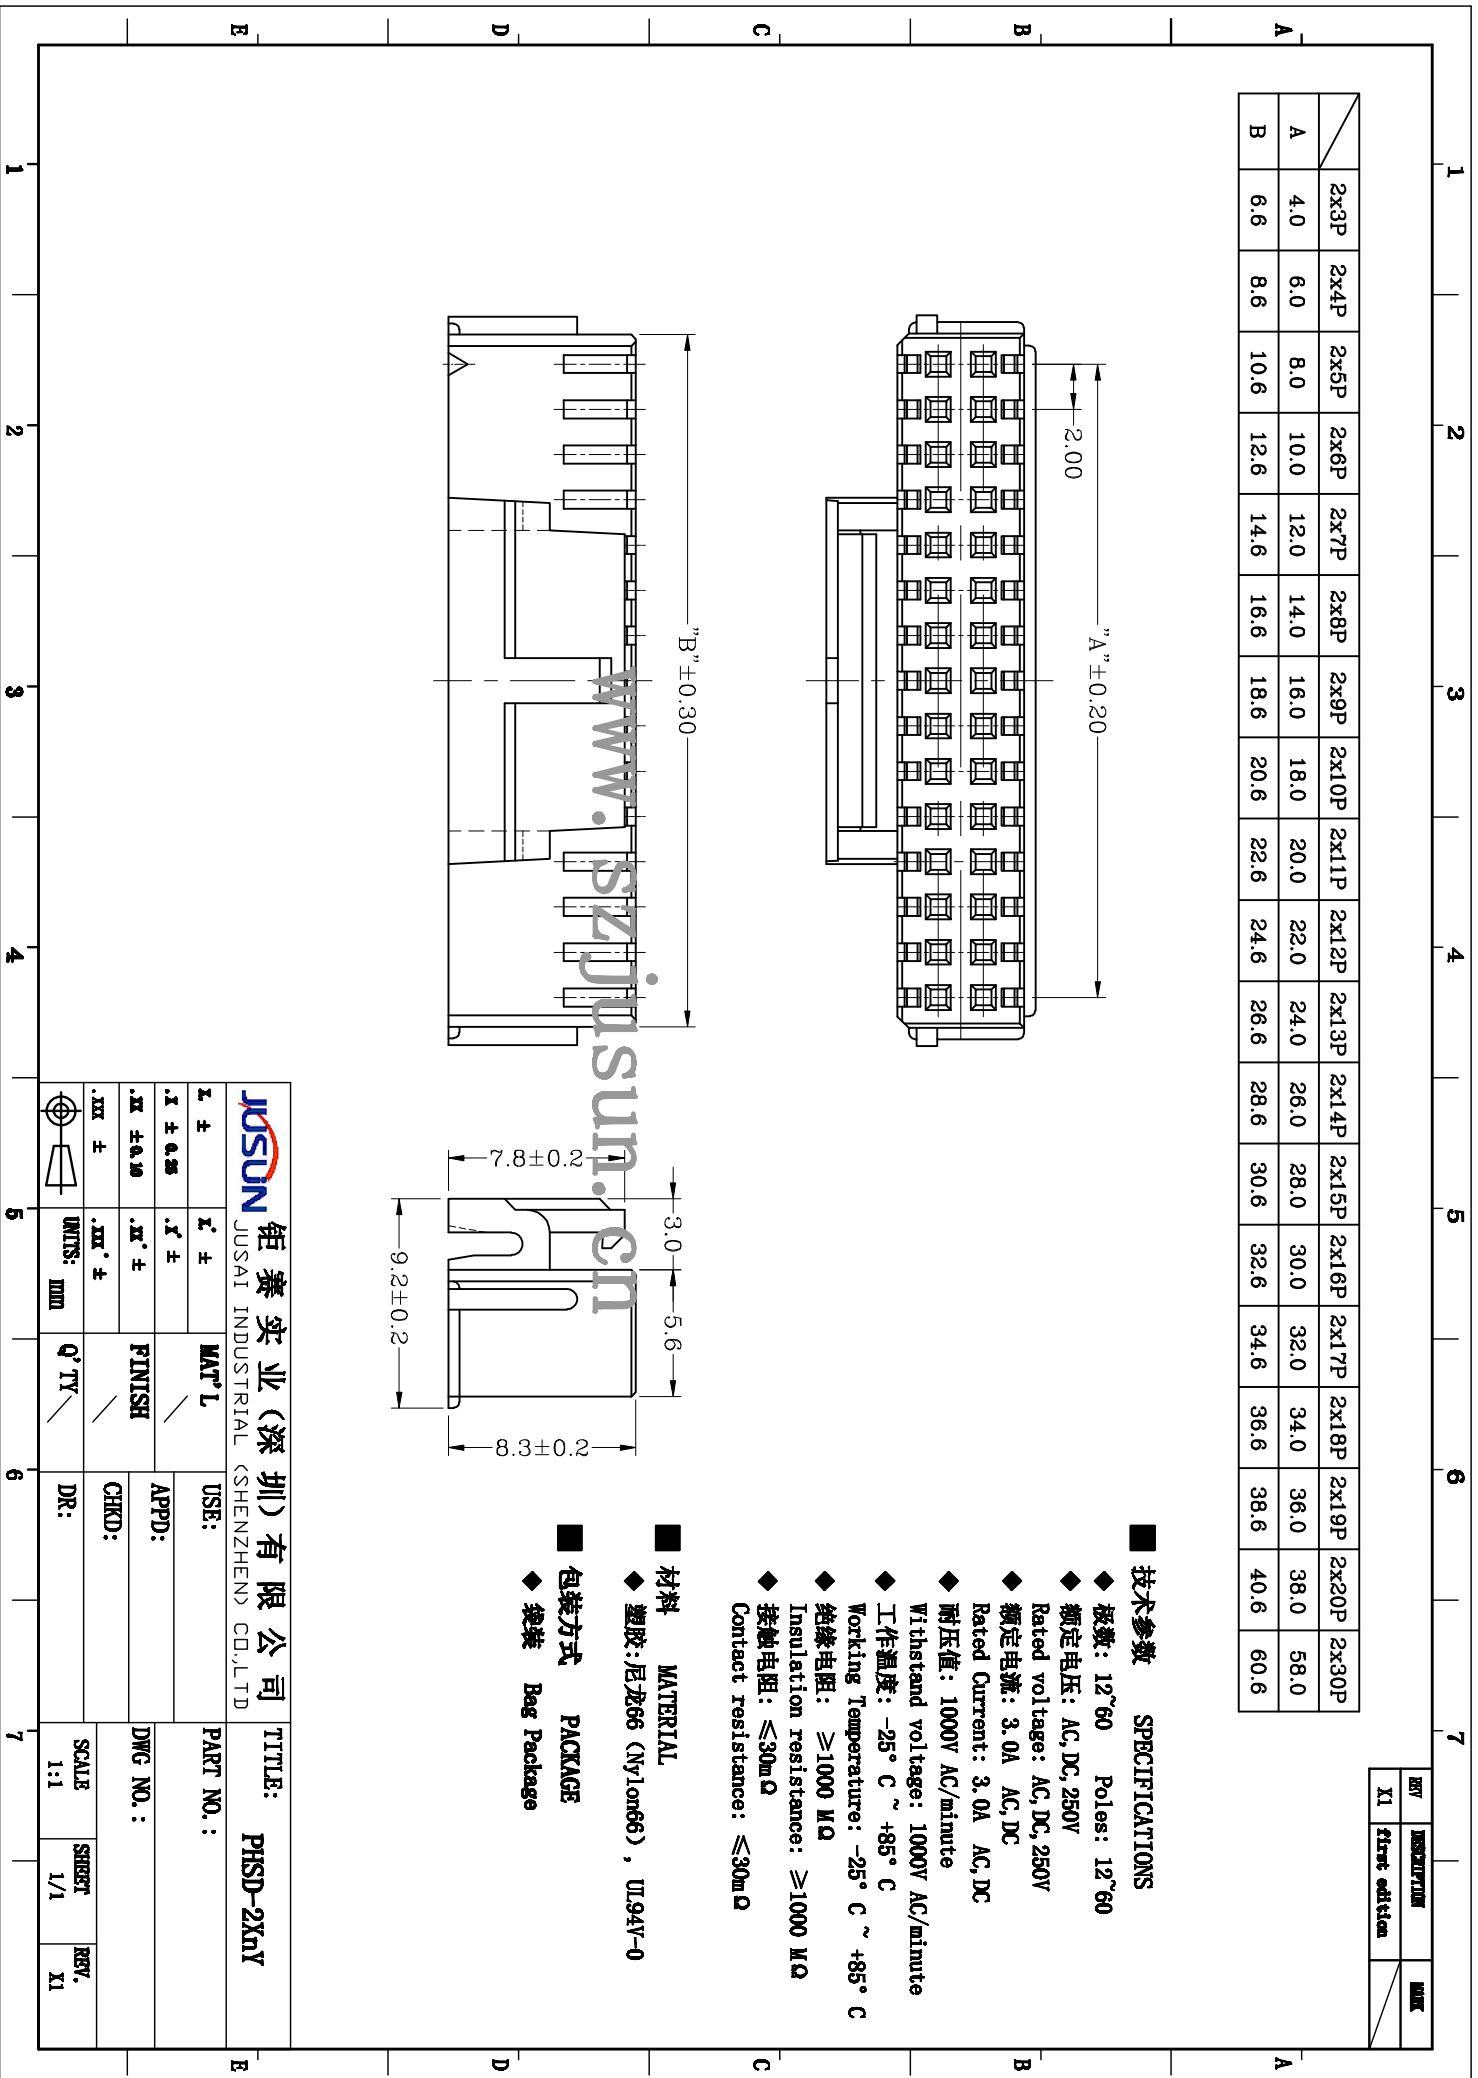

REV	DESCRIPTION	DATE
XI	First edition	

矩赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: PHSD-2XNY	
USE: MAT'L	APPD: FINISH	PART NO.:	SCALE: 1:1
CHEKD:	DR:	DWG NO.:	SHEET: 1/1
UNITS: mm	Q'TY		REV.: XI