
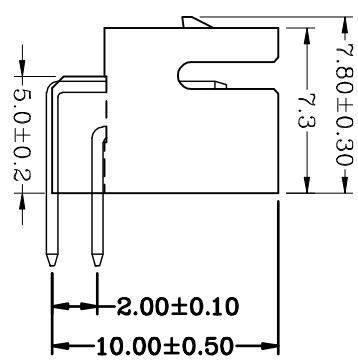
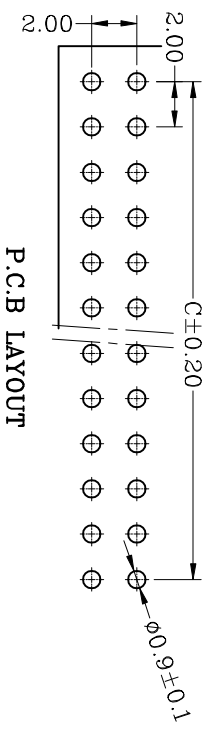
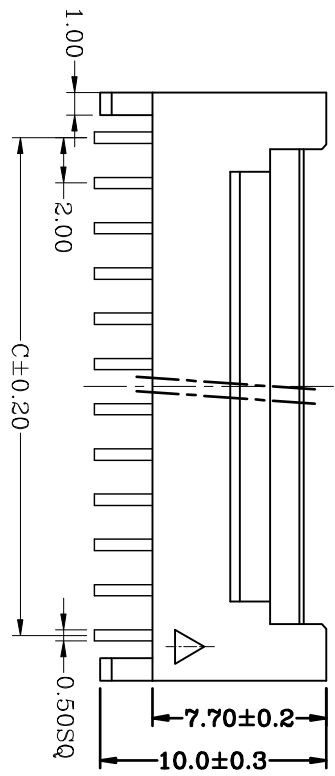


	2x3P	2x4P	2x5P	2x6P	2x7P	2x8P	2x9P	2x10P	2x11P	2x12P	2x13P	2x14P	2x15P	2x16P	2x17P	2x18P	2x19P	2x20P	2x30P
A	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	34.0	36.0	38.0	40.0	42.0	62.0
B	6.8	8.8	10.8	12.8	14.8	16.8	18.8	20.9	22.8	24.8	26.8	28.8	30.8	32.8	34.8	36.8	38.8	40.8	60.8
C	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	34.0	36.0	38.0	58.0

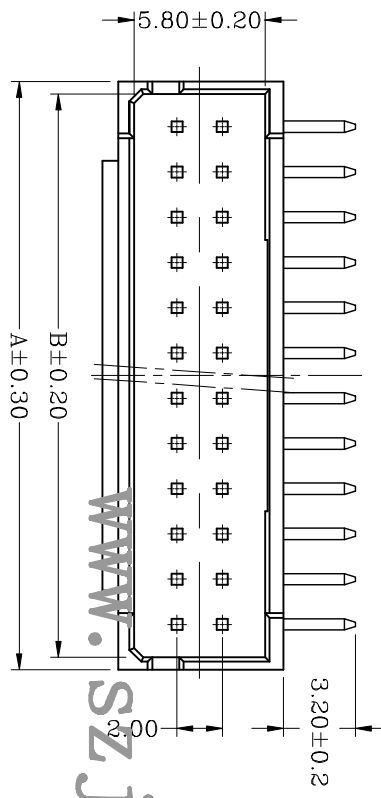

■ 技术参数 SPECIFICATIONS

- ◆ 极数: 12~60 Poles: 12~60
 - ◆ 额定电压: AC, DC, 250V
 - ◆ Rated voltage: AC, DC, 250V
 - ◆ 额定电流: 3.0A AC, DC
 - ◆ Rated Current: 3.0A AC, DC
 - ◆ 耐压值: 1000V AC/minute
 - ◆ Withstand voltage: 1000V AC/minute
 - ◆ 工作温度: -25° C ~ +85° C
 - ◆ Working Temperature: -25° C ~ +85° C
 - ◆ 绝缘电阻: ≥1000 MΩ
 - ◆ Insulation resistance: ≥1000 MΩ
 - ◆ 接触电阻: ≤30mΩ
 - ◆ Contact resistance: ≤30mΩ
- 材料 MATERIAL
- ◆ 塑胶: 尼龙46 (Nylon46), UL94V-0
 - ◆ PIN料: 黄铜 (Brass)
- 包装方式 PACKAGE
- ◆ 袋装 Bag Package

		鉅赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: PHSD-2XNAW	
1 ± .1 ± 0.05 .XX ± 0.15 .XX ±	1 ± .1 ± .XX ± .XX ±	MAT'L FINISH Q'TY	USE: APPD: CHECKD: DR:	PART NO.:	SCALE: 1:1 SHEET: 1/1 REV: XI