
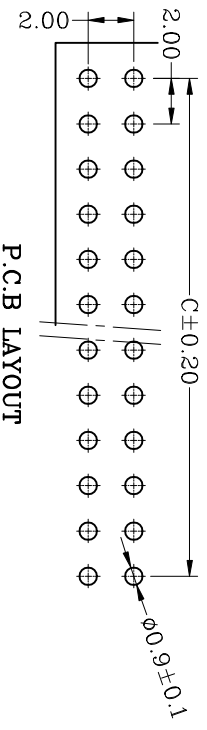
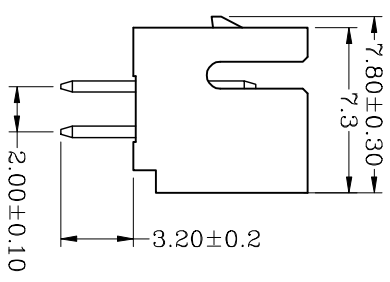
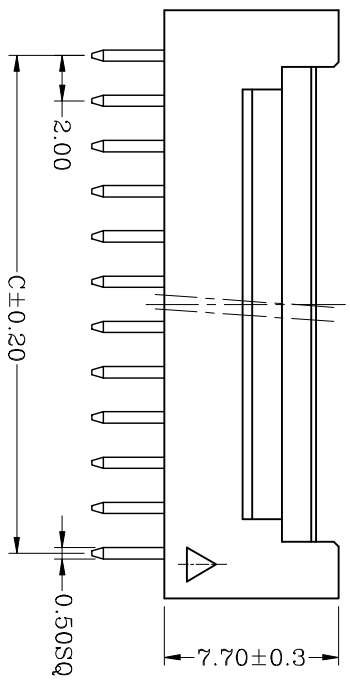


	2x6P	2x7P	2x8P	2x9P	2x10P	2x11P	2x12P	2x13P	2x14P	2x15P	2x16P	2x17P	2x18P	2x19P	2x20P	2x30P
A	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	34.0	36.0	38.0	40.0	42.0	62.0
B	12.8	14.8	16.8	18.8	20.9	22.8	24.8	26.8	28.8	30.8	32.8	34.8	36.8	38.8	40.8	60.8
C	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	28.0	30.0	32.0	34.0	36.0	38.0	58.0

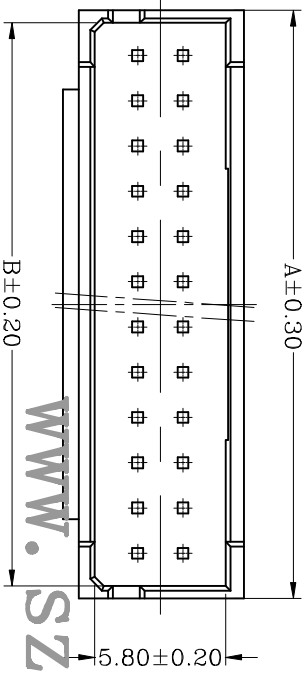

www.szjusun.cn

■ 技术参数 SPECIFICATIONS

- ◆ 极数: 12~60 Poles: 12~60
- ◆ 额定电压: AC, DC, 250V Rated voltage: AC, DC, 250V
- ◆ 额定电流: 3.0A AC, DC Rated Current: 3.0A AC, DC
- ◆ 耐压值: 1000V AC/minute Withstand voltage: 1000V AC/minute
- ◆ 工作温度: -25° C ~ +85° C Working Temperature: -25° C ~ +85° C
- ◆ 绝缘电阻: ≥1000 MΩ Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤30mΩ Contact resistance: ≤30mΩ

■ 材料 MATERIAL

- ◆ 塑胶: 尼龙46 (Nylon46), UL94V-0
- ◆ PIN针: 黄铜 (Brass)

■ 包装方式 PACKAGE

- ◆ 袋装 Bag Package

矩赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: PHS-2XnA	
尺寸 L ± 0.15 W ± 0.15 H ± 0.05	公差 L ± 0.15 W ± 0.15 H ± 0.05	UNIT: mm	SCALE: 1:1
APPD: /	FINISH: /	CHEKD: /	SHEET: 1/1
DR: /	QTY: /	DR: /	REV.: XI
USE: /		PART NO.: /	
APPD: /		DWG NO.: /	