


REV	DESCRIPTION	MARK
X1	First edition	

- SPECIFICATIONS
- Voltage Rating: 250V AC/DC
 - Current rating: 2A AC/DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1,000M Ω min
 - Temperature range: -25°C- +85°C
 - Contact Resistance: 20m Ω max
- HOUSING
- Poles: 2-16
 - Material: Nylon 66 UL94V-0
- QTY: 1,000 pcs/Tape bag

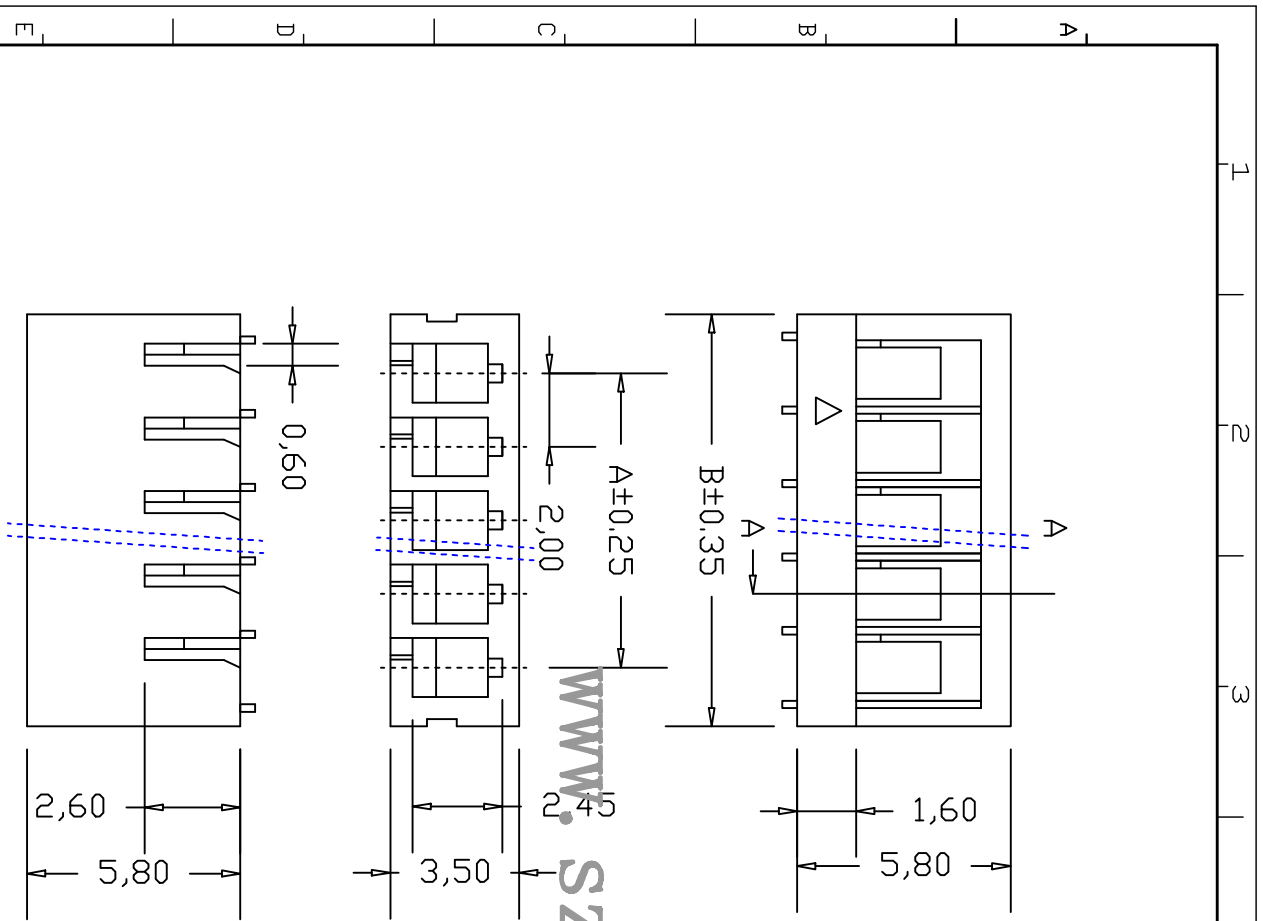

Part NO.	Dimensions (mm)	
	A	B
SAN-2Y	2.00	5.20
SAN-3Y	4.00	7.20
SAN-4Y	6.00	9.20
SAN-5Y	8.00	11.20
SAN-6Y	10.00	13.20
SAN-7Y	12.00	15.20
SAN-8Y	14.00	17.20
SAN-9Y	16.00	19.20
SAN-10Y	18.00	21.20
SAN-11Y	20.00	23.20
SAN-12Y	22.00	25.20
SAN-13Y	24.00	27.20
SAN-14Y	26.00	29.20
SAN-15Y	28.00	31.20
SAN-16Y	30.00	33.20

JUSON 钜赛实业(深圳)有限公司		JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD	
X ±	X' ±	MAT'L	USE:
X ± 0.25	X' ±	Phosphor bronze	
XX ± 0.15	XX' ±	FINISH	APPD:
XXX ±	XXX' ±	Tin Plated	CHKD:
UNITS: mm	UNITS: mm	Q'TY	DR:
TITLE: SAN-nY		PART NO.:	
SCALE 1:1	SHEET 1/1	REV. X1	