


REV	DESCRIPTION	MARK
XI	first edition	

**SPECIFICATIONS**

- Voltage rating: 250V AC,DC
  - Current rating: 3A,AC,DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance:1000M $\Omega$ min
  - Temperature range:-25 C - +85C  
(including temperature rise in applying electrical current)
  - Contact resistance:30m $\Omega$  max
- WAFER
- Poles:2-16
  - Material:Nylon 66, UL94V-0  
Brass, Tin-plating
  - QTY:1000 pcs/bag

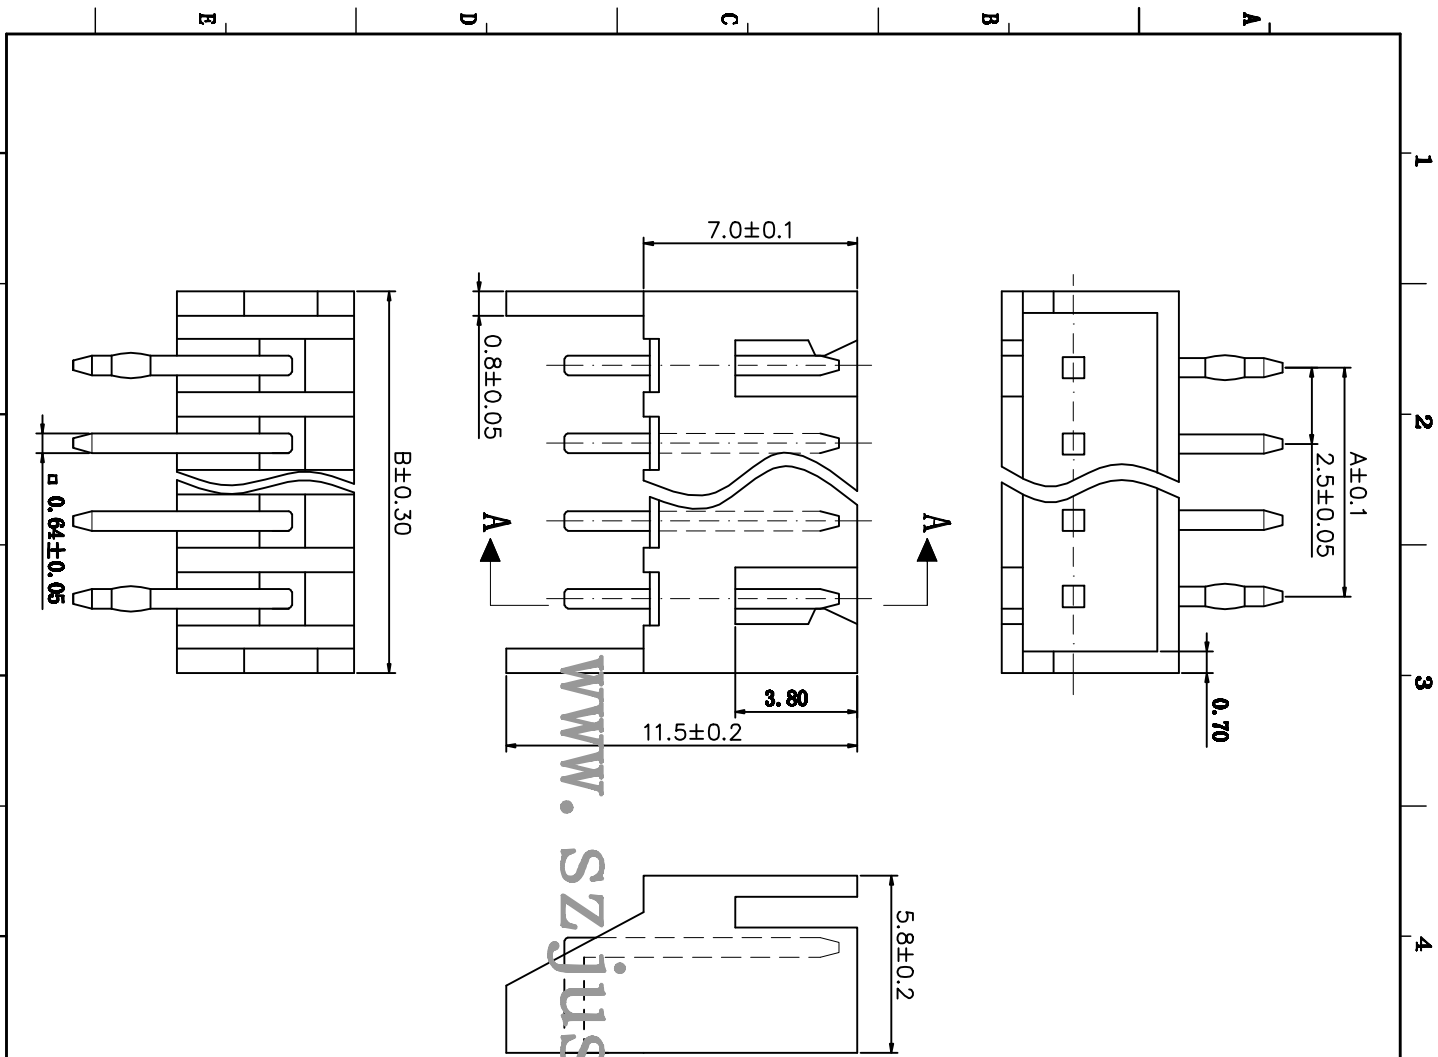

**SECTION A-A**

PIN	DIMENSION (mm)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00

**JUSON** 钜赛实业(深圳)有限公司  
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

L ±	L' ±	MAT'L	USE:	PART NO.:	TITLE:
.X ± 0.25	.X' ±	FINISH	APPD:		XH-nAWD
.XX ± 0.10	.XX' ±	DR:	CHEKD:	DWG NO.:	
.XXX ±	.XXX' ±	Q'TY	SCALE	SHEET	REV.
UNITS: mm			1:1	1/1	XI