

REV	DESCRIPTION	DATE
XI	Draw edition	


SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 3A,AC,DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25°C - +85°C
(including temperature rise in applying electrical current)
- Contact resistance: 30m Ω max

WAFER


- Poles: 2-16
- Material: Nylon 66, UL94V-0
- Brass Tin-plating
- Qty 1000 pcs/bag

www.szjusun.com

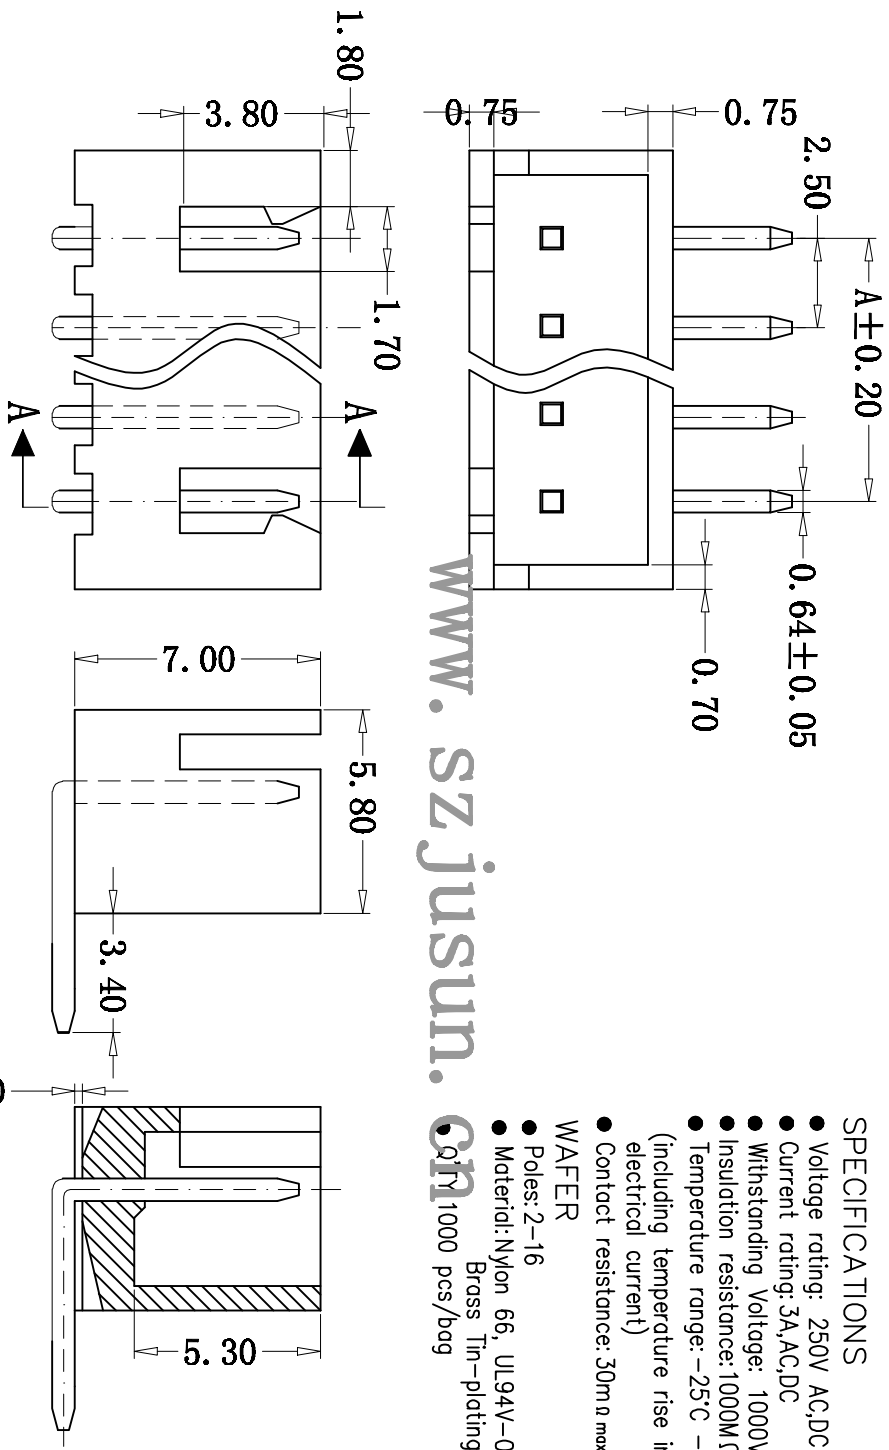

PIN	DIMENSION (mm)	
	A	B
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	40.00

SECTION A-A

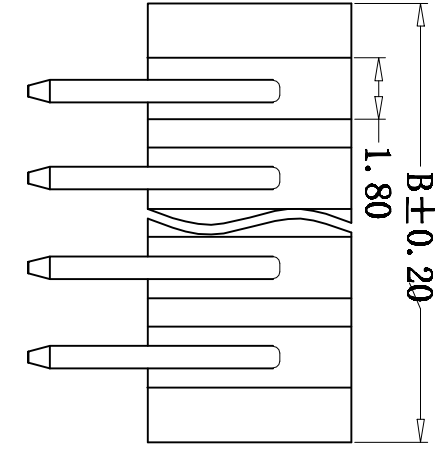

		钜赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: XH-nAW	
USE: .I ± 0.3 .II ± 0.10 .III ±	MAT'L / FINISH /	APPD: / CHEKD: / DR: /	PART NO.:	SCALE 1:1	SHEET 1/1
UNIT: mm			Q'TY	REV. XI	