


REV	DESCRIPTION	DATE
XI	Draw edition	

SPECIFICATIONS



- Voltage rating: 250V AC,DC
 - Current rating: 3A,AC,DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance:1000M Ohm
 - Temperature range: -25°C - +85°C (including temperature rise in applying electrical current)
 - Contact resistance: 30m Ω max
- WAFER
- Poles: 2-16
 - Material: Nylon 66, UL94V-0
 - Brass Tin-plating
 - Q'TY: 1000 pcs/bag

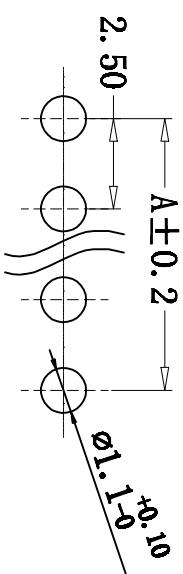

PCB Layout

NO	DIMENSION (mm)	
	A	B
1	2.50	7.50
2	2.50	7.50
3	5.00	10.00
4	7.50	12.50
5	10.00	15.00
6	12.50	17.50
7	15.00	20.00
8	17.50	22.50
9	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00

SECTION A-A

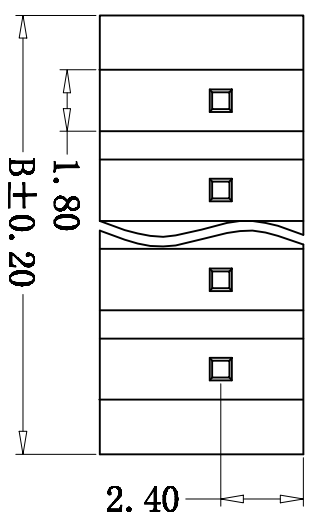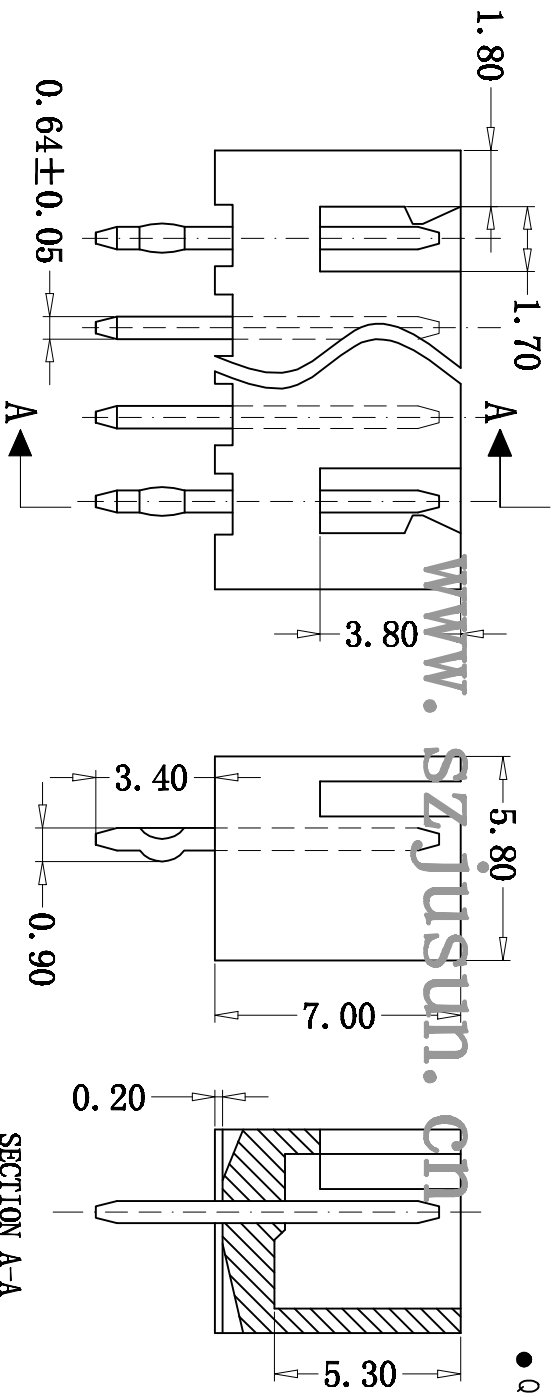

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

USE: MAT'L FINISH

APPD: DR: Q'TY

CHEKD: DR: Q'TY

UNITS: mm

SCALE 1:1

SHEET 1/1

REV. XI

TITLE: XH-na
PART NO.:
DWG NO.:
SCALE 1:1
SHEET 1/1
REV. XI

WWW.SZJUSUN.COM