

REV	DESCRIPTION	MARK
X1	first edition	


SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 3A,AC,DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance:1000MΩmin
- Temperature range:-25°C - +85°C (including temperature rise in applying electrical current)
- Applicable PC board thickness:0.063"(1.6mm)
- Contact resistance:Initial Value/10ma max
After environmental Texting/20ma

WAFFER

- Poles:2-16
- Material:Nylon 66, UL94V-0

www.szjusun.cn

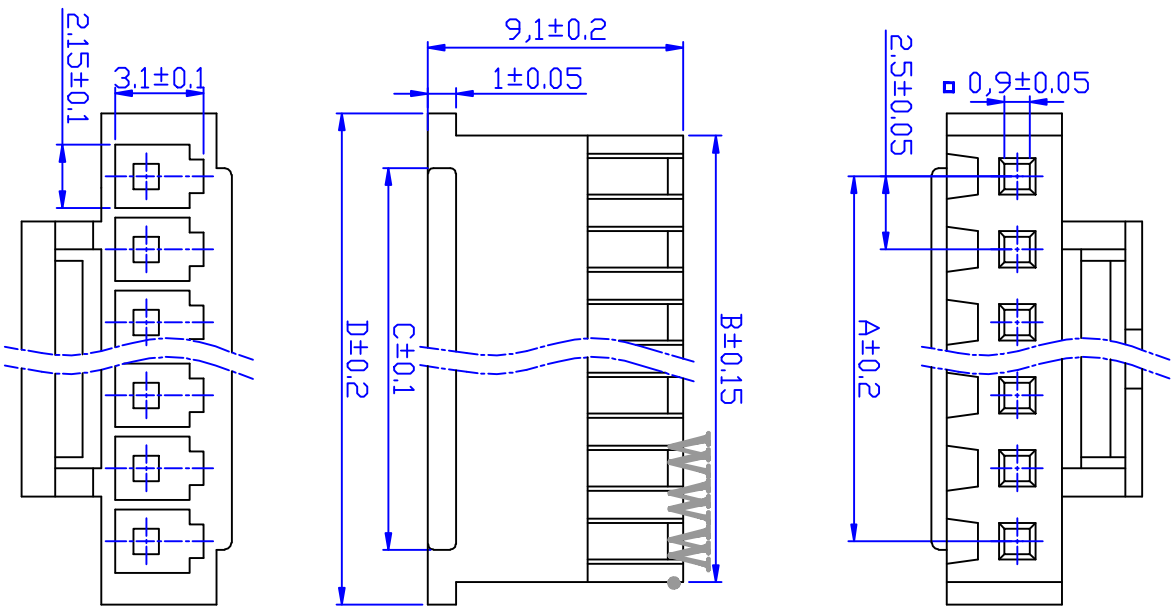

孔位	A	B	C	D
2	2.50	5.00	3.50	7.50
3	5.00	7.50	6.00	10.00
4	7.50	10.00	8.50	12.50
5	10.00	12.50	11.00	15.00
6	12.50	15.00	13.50	17.50
7	15.00	17.50	16.00	20.00
8	17.50	20.00	18.50	22.50
9	20.00	22.50	21.00	25.00
10	22.50	25.00	23.50	27.50
11	25.00	27.50	26.00	30.00
12	27.50	30.00	28.50	32.50
13	30.00	32.50	31.00	35.00
14	32.50	35.00	33.50	37.50
15	35.00	37.50	36.00	40.00
16	37.50	40.00	38.50	42.50

JUSUN 巨赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

X ±	X' ±	MAT'L	APPD:	PART NO.:	XHS-nY
X ± 0.1	X' ± 0.1*	∕		CUS PART NO.:	
XX ± 0.05	XX' ± 0.05*	FINISH	CHKD:	DATE	VERSION
XXX ±	XXX' ±	∕		2017.04.08	VI.0
UNITS: mm	Q'TY	DR:	SCALE 1:1	SHEET 1/1	REV. X1