

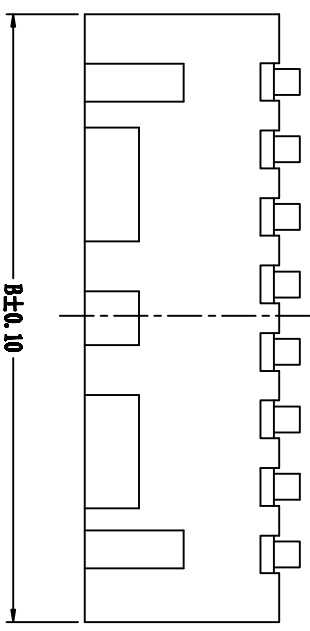


REV	DESCRIPTION	DATE
XI	First edition	

Poles	A	B	C
2 A	2.5	7.5	4.00
3 A	5.0	10.0	3.30
4 A	7.5	12.5	5.72
5 A	10.0	15.0	8.22
6 A	12.5	17.5	10.72
7 A	15.0	20.0	13.22
8 A	17.5	22.5	15.72
9 A	20.0	25.0	18.22
10A	22.5	27.5	20.72
11A	25.0	30.0	23.22
12A	27.5	32.5	25.72
13A	30.0	35.0	28.22
14A	32.5	37.5	30.72
15A	35.0	40.0	33.72
16A	37.5	42.5	35.72

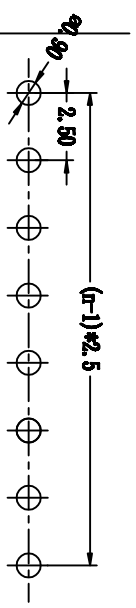

www.szjusun.cn

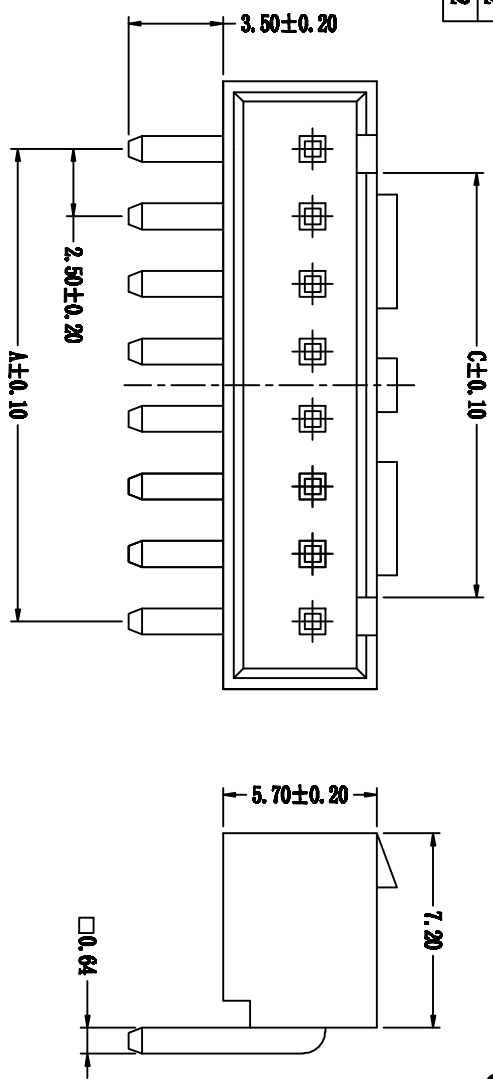

- ### SPECIFICATIONS
- Voltage rating: 250V AC,DC
  - Current rating: 3A,AC,DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance:1000MΩmin
  - Temperature range:-25°C - +85°C (including temperature rise in applying electrical current)
  - Contact resistance: 30mΩ max
- ### WAFER
- Poles: 2-16
  - Material: Nylon 66, UL94V-0
  - Brass Tin-plating
  - Q'TY: 1000 pcs/bag

<b>钰赛实业(深圳)有限公司</b> JUSUN INDUSTRIAL (SHENZHEN) CO.,LTD		<b>TITLE:</b> XHS-PAW	
<b>USE:</b> MAT'L	<b>APPD:</b>	<b>PART NO.:</b>	<b>SCALE</b> 1:1
<b>FINISH:</b>	<b>CHEKD:</b>	<b>DR:</b>	<b>SHEET</b> 1/1
<b>UNITS:</b> mm	<b>Q'TY:</b>	<b>REV.</b> XI	