
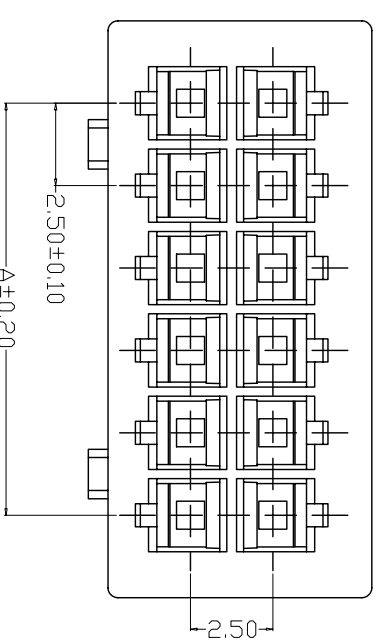
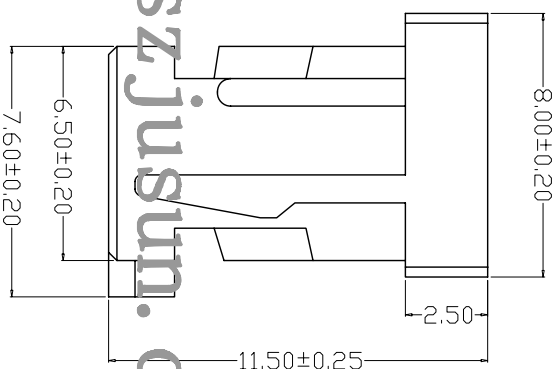
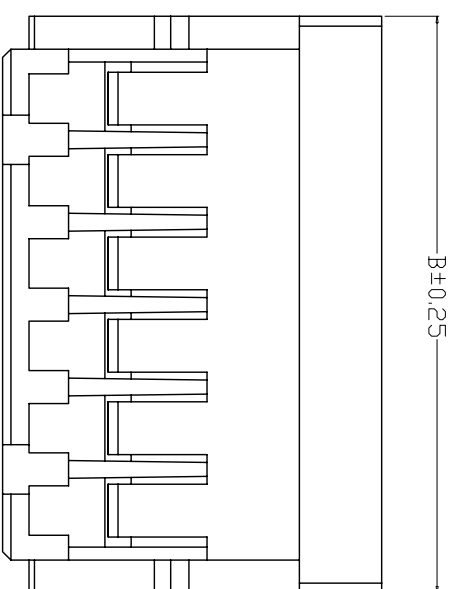



SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 30mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltagng: 800V AC/minute
- 7、Material:Housing PA66, UL94V-0

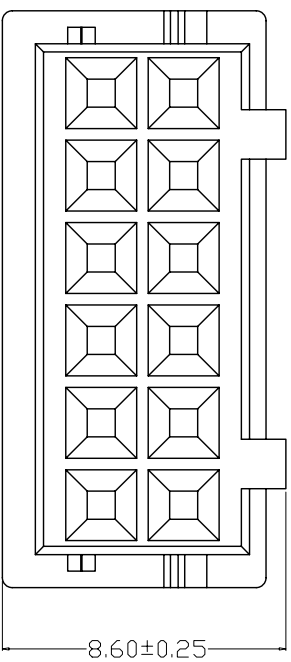

www.szjusun.cn

版本 REV.	日期 DATE	ECN NO.	变更内容 DESCRIPTION	制图 DRAWN

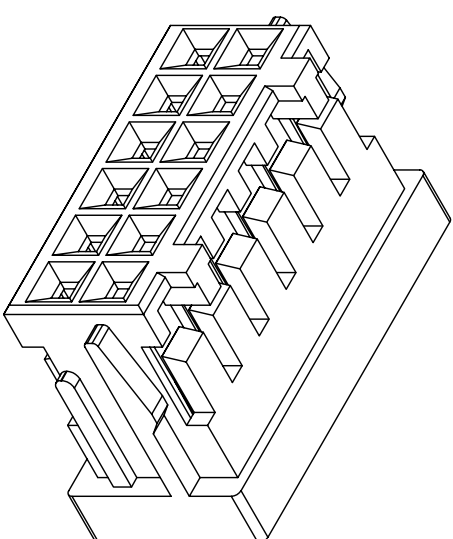

编 号	尺寸 (mm)	
	A	B
A2557-2*02Y	2.50	7.50
A2557-2*03Y	5.00	10.00
A2557-2*04Y	7.50	12.50
A2557-2*05Y	10.00	15.00
A2557-2*06Y	12.50	17.50
A2557-2*07Y	15.00	20.00
A2557-2*08Y	17.50	22.50
A2557-2*09Y	20.00	25.00
A2557-2*10Y	22.50	27.50
A2557-2*11Y	25.00	30.00
A2557-2*12Y	27.50	32.50
A2557-2*20Y	47.50	52.50

GENERAL TOLERANCE		制 图 DRAWING	料号 PART NO.	A2557-2*02nY	版本 REV.	A
X.X±0.25	X.±2°	审 核 CHECK	品 名 TITLE	XHD2_5孔座	页次 SHEET	1/1
X.XX±0.20		核 准 APPROVAL	客户料号 CUST. NO.			
X.XXX±0.10		单 位 UNITS	比 例 SCALE	1:1		
		MM				

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD