


REV	DESCRIPTION	MARK
X1	First edition	

**SPECIFICATIONS**

- Voltage Rating: 250V AC/DC
- Current Rating: 2.5A AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation Resistance: 1,000M $\Omega$ min
- Temperature Range: -25°C to +85°C
- Contact Resistance: 20m $\Omega$ max

**TERMINAL**

- Wire Range: AWG#22-#28
- Material: Phos. Bronze
- Finish: Tin Plated
- Thickness: 0.20mm
- Q`TY: 10,000PCS/roll

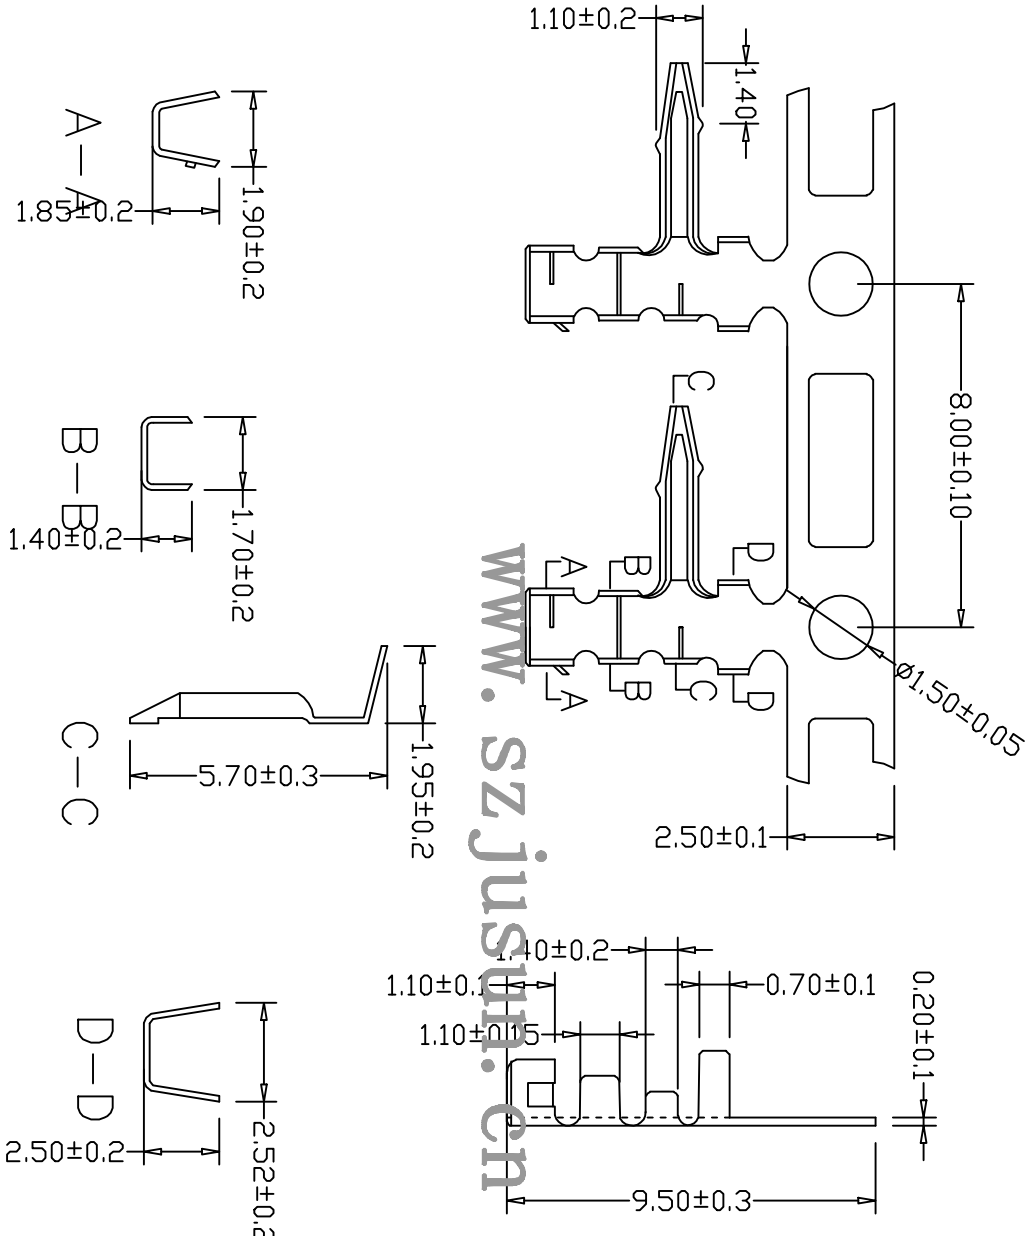

www.szjustin.cn

<b>巨赛实业(深圳)有限公司</b> JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: <b>JC25-TER</b>	
X ± X ± 0.20 XX ± 0.10 XXX ±	X* ± X* ± XX* ± XXX* ±	MAT'L Phosphor bronze	USE: APP'D: CHK'D: DR:
FINISH Tin Plated		PART NO.: DWG NO.: SCALE 1:1	
Q`TY 		SHEET 1/1 REV. X1	