
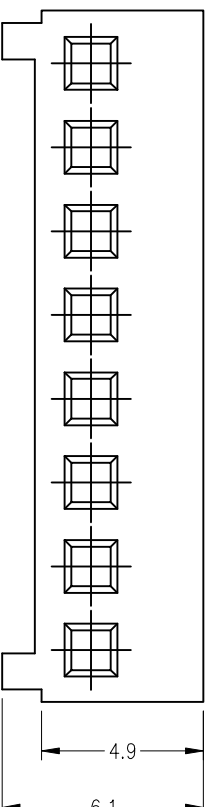
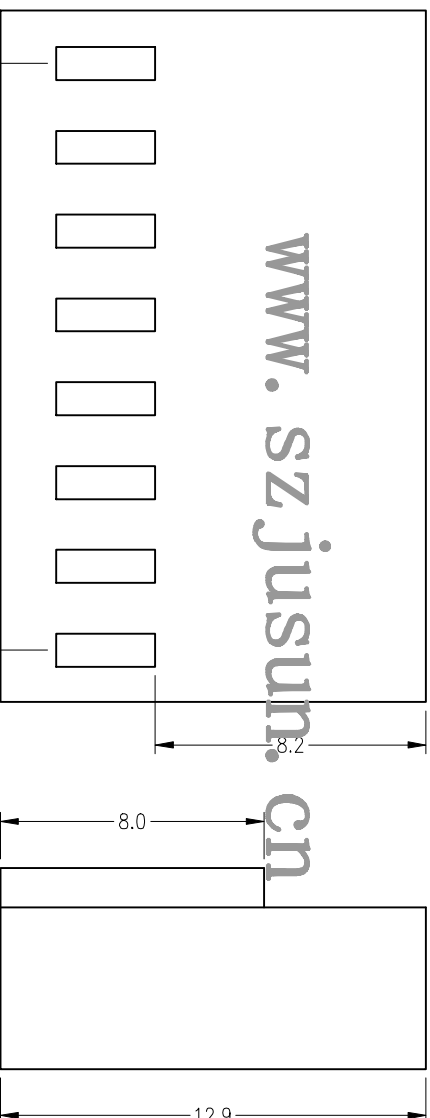


Part No	A	B
2510-2Y	2.54	5.8
2510-3Y	5.08	8.34
2510-4Y	7.62	10.88
2510-5Y	10.16	13.33
2510-6Y	12.70	15.87
2510-7Y	15.24	18.41
2510-8Y	17.78	20.95
2510-9Y	20.32	23.49
2510-10Y	22.86	26.03
2510-11Y	25.40	28.57
2510-12Y	27.94	31.11
2510-13Y	30.48	33.65
2510-14Y	33.02	36.19
2510-15Y	35.56	38.73
2510-16Y	38.10	41.27
2510-17Y	40.64	43.81
2510-18Y	43.18	46.35
2510-19Y	45.72	48.89
2510-20Y	48.26	51.43

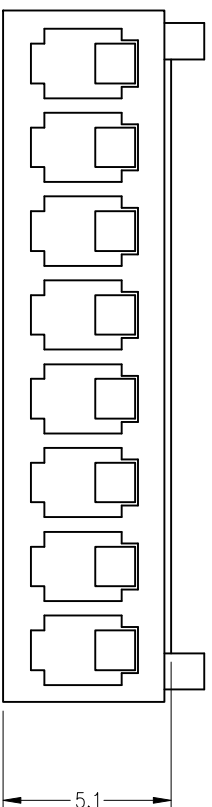

www.szjusun.cn

REV	DESCRIPTION	MARK
X1	First edition	

■ 技术参数 (SPECIFICATIONS)

- ◆ 极数: 2~20
- ◆ Poles: 2~20
- ◆ 适用线规: AWG#28-#22
- ◆ Applicable wire: AWG#28-#22
- ◆ 额定电压: AC,DC,250V(50HZ有效值)
- ◆ Voltage rating: AC,DC,250V(200HZ)
- ◆ 额定电流: 3.0A,AC,DC
- ◆ Current rating: 3.0A,AC,DC
- ◆ 耐压值: 1000V AC/minute
- ◆ Withstand voltage: 1000V AC/minute
- ◆ 工作温度: -25 C--+85 C
- ◆ Working Temperature: -25 C--+85 C
- ◆ 绝缘电阻: >1000 ohm
- ◆ Insulation resistance: >1000 ohm
- ◆ 接触电阻: < 0.02 oh
- ◆ Contact resistance: < 0.02 oh

■ 材料 MATERIAL

- ◆ 端子: 磷青铜
- ◆ Terminal: Phosphor bronze
- ◆ 外壳 (Housing)
- ◆ 材质: 尼龙 · UL 94V-0
- ◆ Material: Nylon, UL94-0

矩赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: 2510-nY
MAT'L I ± 0.20 II ± 0.30 III ±	MAT'L I ± 0.1° II ± 0.05° III ±	APPD: FINISH CRD: Q'TY DR:
UNITS: 	DATE 2016.04.20	VERSION V1.0
SCALE 1:1	SHEET 1/1	REV. X1