
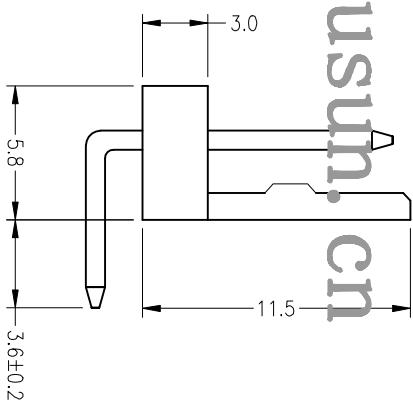
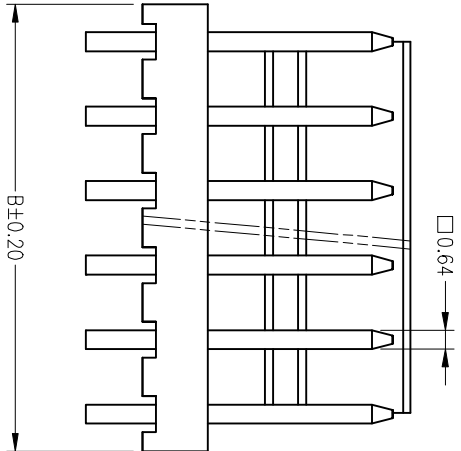


REV	DESCRIPTION	MARK
XI	First edition	

■ 技术参数 (SPECIFICATIONS)

- ◆ 极数: 2-20
Poles: 2-20
 - ◆ 适用线规: AWG#28-#22
Applicable wire: AWG#28-#22
 - ◆ 额定电压: AC,DC,250V(50HZ有效值)
Voltage rating: AC,DC,250V(200HZ)
 - ◆ 额定电流: 3.0A,AC,DC
Current rating: 3.0A,AC,DC
 - ◆ 耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/minute
 - ◆ 工作温度: -25°C~+85°C
Working Temperature: -25°C~+85°C
 - ◆ 绝缘电阻: ≥1000 MΩ
Insulation resistance: ≥1000 MΩ
 - ◆ 接触电阻: ≤0.02 Ω
Contact resistance: ≤0.02 Ω
- 材料 MATERIAL
- ◆ PIN 针: 黄铜
PIN Material: Brass
 - ◆ 针座 (Wafer)
材质: PA66, UL 94V-0
Material: PA66, UL94-0

Part No	A	B	Part No	A	B
2510-2AW	2.54	5.08	2510-10AW	22.86	26.40
2510-3AW	5.08	7.62	2510-11AW	25.40	27.94
2510-4AW	7.62	10.16	2510-12AW	27.94	30.48
2510-5AW	10.16	12.70	2510-13AW	30.48	33.02
2510-6AW	12.70	15.24	2510-14AW	33.02	35.56
2510-7AW	15.24	17.78	2510-15AW	35.56	38.10
2510-8AW	17.78	20.32	2510-16AW	38.10	40.64
2510-9AW	20.32	22.86	2510-20AW	48.26	50.80

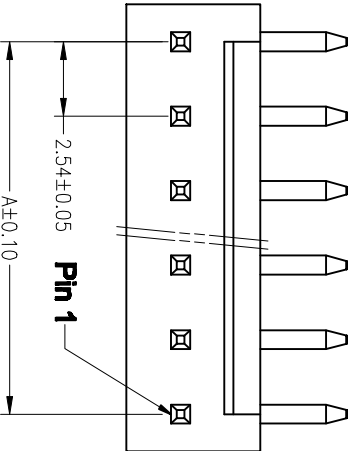

www.szjusun.cn

矩赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: 2510-nAW	
APPD: MATE L		CIS PART NO.:	
X ± .X ± 0.30 .XX ±	X' ± .X' ± 0.1" .XX' ±	FINISH:	CRD:
	UNITS: mm	QTY	DR:
SCALE 1:1	SHEET 1/1	DATE 2017.04.20	VERSION V1.0
			REV. XI