


REV	DESCRIPTION	MARK
X1	first edition	

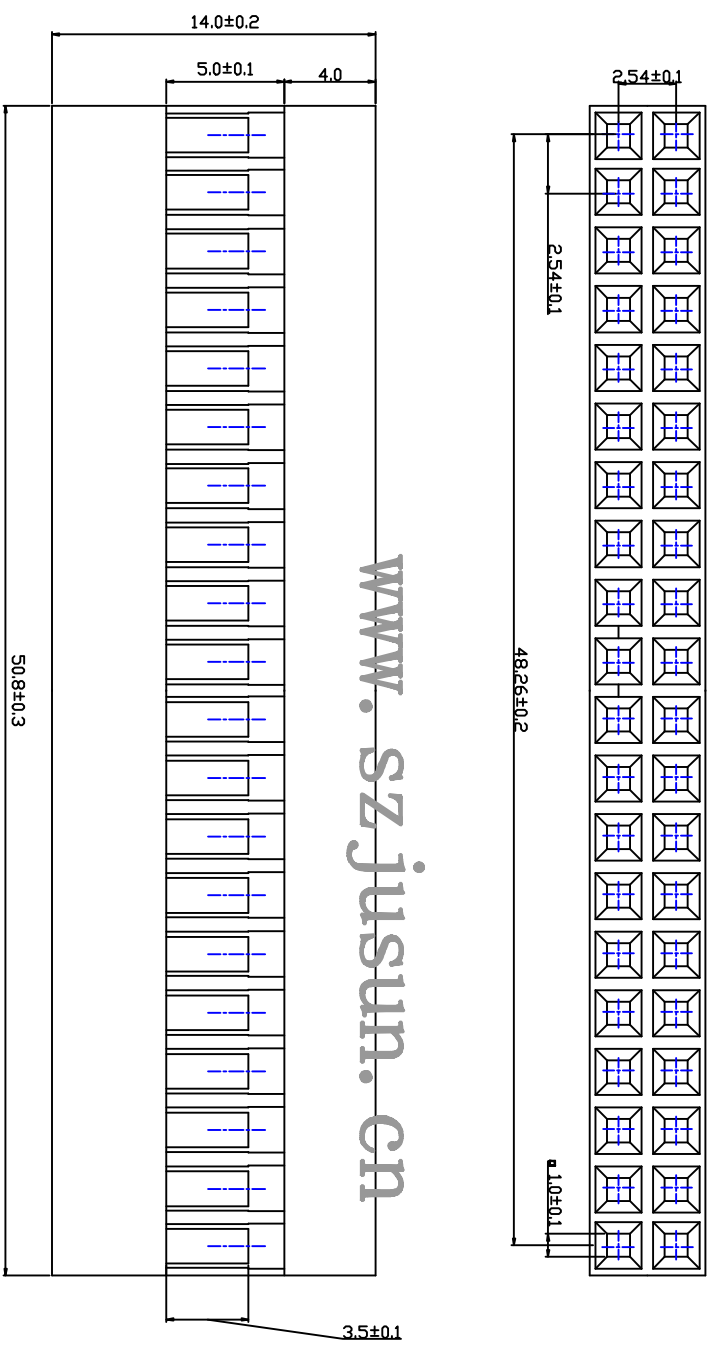

WWW.SZJUSUN.CN

技术要求:

- 1、胶壳表面无缺料,无飞边变形、目视切面没有纹点、无明显划痕、斑点花纹油污等。
- 2、规格: 额定电流: 1A, AC, DC;
额定电压: 500V, AC, DC;
工作温度: -25 C~+85 C;
耐压值: 1000V, AC/min;
接触电阻: 30mΩ /Max;
绝缘电阻: 1000MΩ /Min;
- 3、材质: 胶壳: PP0 UL94V-0

JUSUN 巨赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		PART NO.: 杜邦2.54-2X20Y (HSG)	
X ±	X' ±	MAT'L	APPD:
X ± 0.1	X' ± 0.1'	PBT	
XX ± 0.05	XX' ± 0.05'	FINISH	CHKD:
XXX ±	XXX' ±	Q'TY	DR:
UNIT: mm	UNIT: mm		
SCALE 1/1	SHEET 1/1	DATE 2017.05.27	VERSION V1.0
REV. X1			