
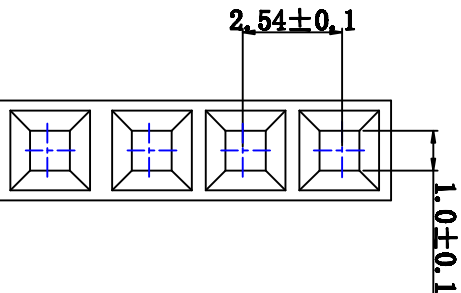


| REV | DESCRIPTION | MARK |
|-----|---------------|------|
| X1 | first edition | |

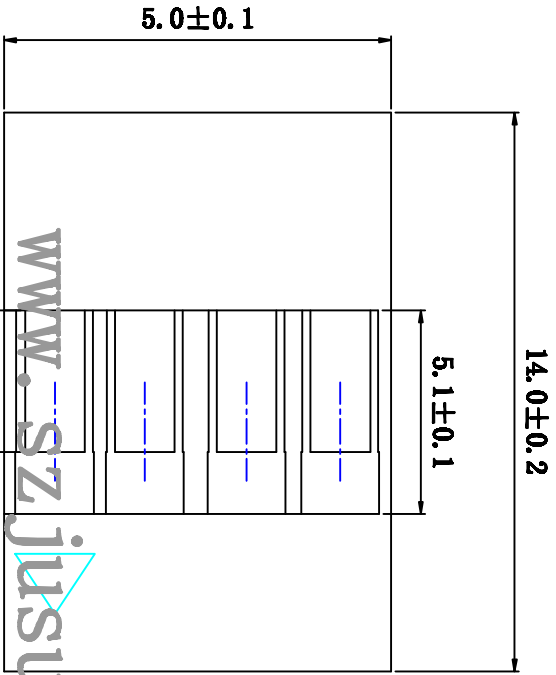

www.szjusun.cn

- 技术要求:**
- 1、胶壳表面无缺料,无飞边变形、目视切面没有纹点、无明显划痕、斑点花纹油污等。
 - 2、规格: 额定电流:1A, AC, DC;
额定电压:500V, AC, DC;
工作温度:-25 C~+85 C;
耐压值:1000V, AC/min;
接触电阻:30mΩ/Max;
绝缘电阻:1000MΩ/Min;
 - 3、材质: 胶壳: PBT UL94V-0

| | | | | | |
|-------------------------------------|-------------|-------------------------------------|-------|--------------------|---------|
| JUSUN | | 巨赛实业(深圳)有限公司 | | PART NO.: | |
| JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD | | JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD | | 杜邦2.54-1X4Y (ISSG) | |
| X ± | X' ± | MAT'L | APPD: | DWG NO.: | |
| X ± 0.30 | X' ± 0.1° | PA46 | | | |
| XX ± 0.10 | XX' ± 0.05° | FINISH | CHKD: | DATE | VERSION |
| XXX ± | XXX' ± | | | 2017.07.02 | V1.0 |
| UNIT: mm | UNIT: mm | Q'TY | DR: | SCALE | SHEET |
| | | | | 1/1 | 1/1 |
| | | | | REV. | REV. |
| | | | | X1 | X1 |