

REV	DESCRIPTION	MARK
X1	first edition	


SPECIFICATIONS

- Voltage rating: 600V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 1800V AC/minute
- Insulation resistance: 500M Ω min
- Temperature range: -25 °C - +85 °C
- Contact resistance: 20m Ω

HOUSING

- Part No: BHS3.5-nY
- Poles: 2-5
- Material: Nylon 66 UL94V-0
- Q'TY: 1000 pcs/bag

Poles	PART NO	DIMENSION (mm)		
		A	B	C
2	BHS4.0-2Y	4.00	9.80	6.35
3	BHS4.0-3Y	8.00	13.80	10.35
4	BHS4.0-4Y	12.00	17.80	14.35
5	BHS4.0-5Y	16.00	21.80	18.35

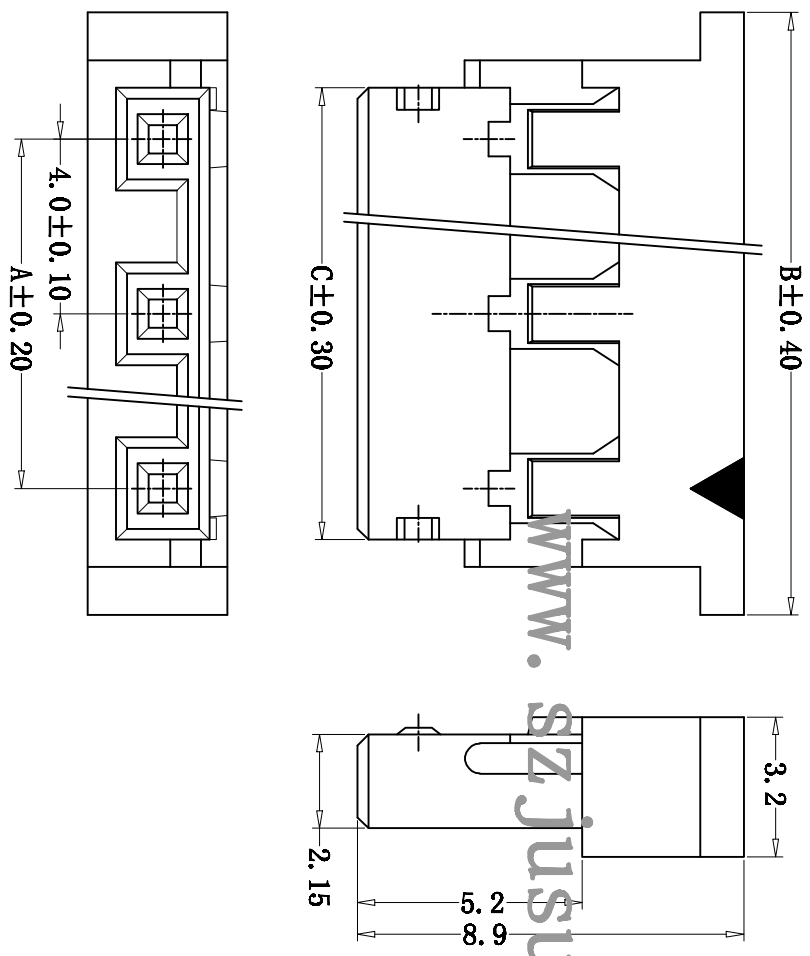

		炬赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: BHS4.0-nY	
K. ±	K' ±	MAT'L	USE:	PART NO.:	
.I ± 0.1	.X' ±	/	APPD:	DWG NO.:	
.IX ± 0.05	.XI' ±	FINISH	CHKD:	SCALE 1:1	
.XXX ±	.XXX' ±	/	DR:	SHEET 1/1	
	UNITS: mm	Q'TY		REV. X1	