


REV	DESCRIPTION	MARK
X1	First edition	

■ SPECIFICATIONS

- Voltage Rating: 250V AC/DC
- Current Rating: 7A AC/DC
- Withstanding Voltage: 1500V AC/minute
- Insulation Resistance: 1,000M Ω min.
- Temperature Range: -25 $^{\circ}$ C to +85 $^{\circ}$ C
- Contact Resistance: 20m Ω max

■ TERMINAL

- Wire Range: AWG#18-#22
- Material: Brass
- Finish: Tin Plated
- Thickness: 0.25mm
- QTY: 4,000PCS/Reel

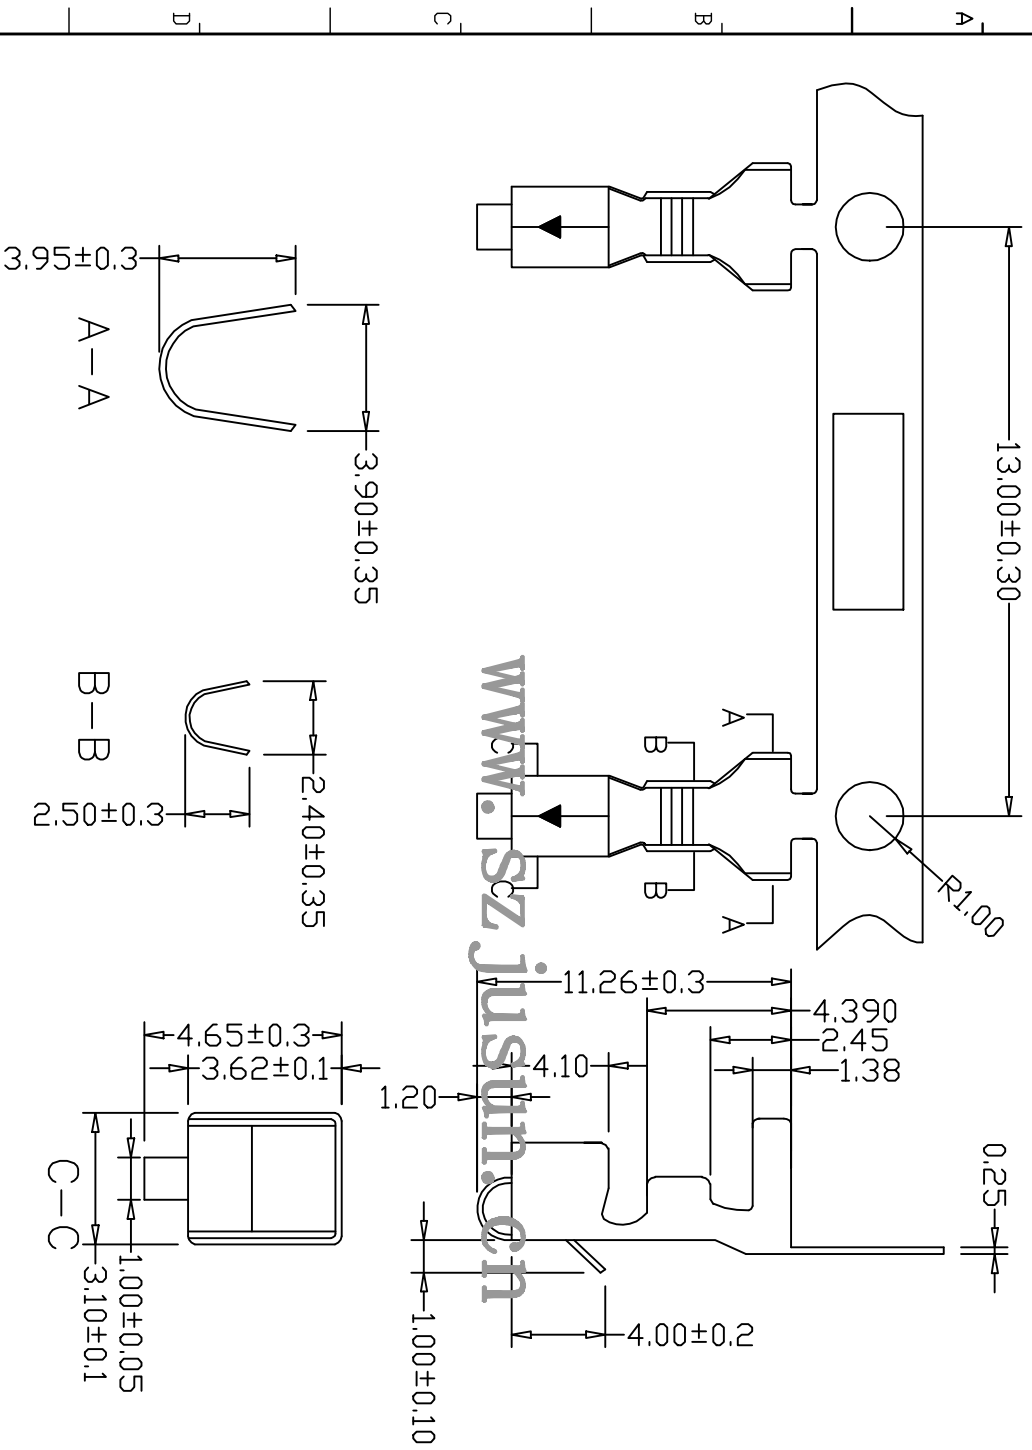

WWW.SZJUSTON.COM

钰赛实业(深圳)有限公司 JUSUN INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: VH-Ter PART NO.:	
X ±	X' ±	MAT'L	USE:
X ± 0.2	X' ±	FINISH	APP'D:
XX ± 0.1	XX' ±	CHKD:	DR:
XXX ±	XXX' ±	UNIT	Q'TY
		mm	
SCALE 1:1		SHEET 1/1	REV. X1