

REV	DESCRIPTION	DATE
XI	After edition	



SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 7A,AC,DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25°C - +85°C
- Applicable PC board thickness: 0.063 (1.6mm)
- Contact resistance: Initial Voice/10ma max
After environmental
Texting/20m

HOUSING

- Poles: 2-15
- Material: Nylon 66, UL94V-0
- Q'TY: 500, 1000 pcs/bag

POLE	DIMENSION (mm)	
	A	B
2	3.96	8.20
3	7.92	12.20
4	11.88	16.20
5	15.84	20.20
6	19.80	24.20
7	23.76	28.20
8	27.72	32.20
9	31.68	36.20
10	35.64	40.20
11	39.60	44.16
12	43.56	48.12
13	47.52	52.08
14	51.48	56.04
15	55.44	60.00

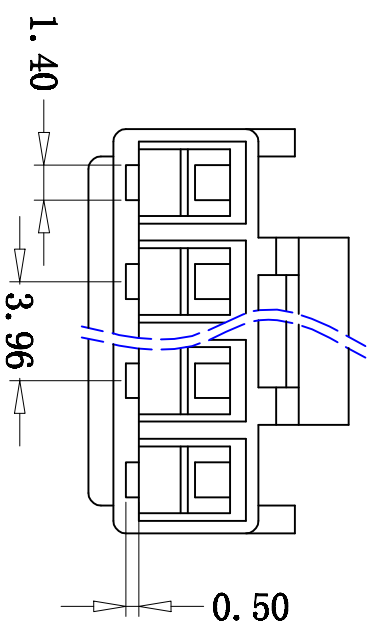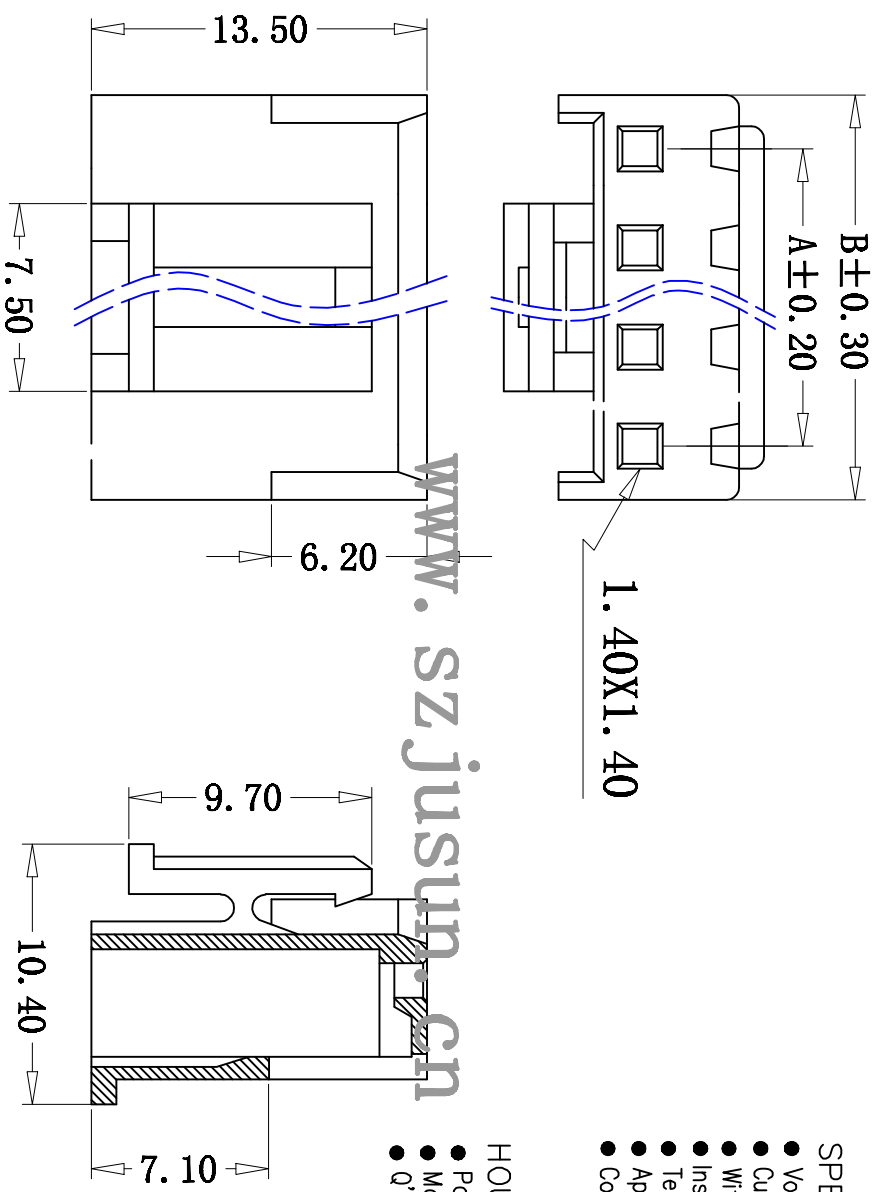

JUSUN 钜赛实业(深圳)有限公司
JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD

TITLE: VH-nY
PART NO.:

\pm	\pm	\pm	USE:	
± 0.03	\pm	\pm	MAT'L	
± 0.1	\pm	\pm	FINISH	
\pm	\pm	\pm	CHEK:	
UNITS: mm	Q'TY	DR:	APPD:	DWG NO.:

SCALE	SHEET	REV.
1:1	1/1	XI