

REV	NO.	DATE	BY
II			


SPECIFICATIONS

- Voltage rating: 250V AC,DC
- Current rating: 7A,AC,DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance:1000M Ω /min
- Temperature range:±25 +85 $^{\circ}$ C
- Applicable PC board thickness:0.063 (1.6mm)
- Contact resistance:Initial Voice/10 μ s
After environmental
Texting/20 μ smax


WAFER

- Poles:2-12
- Material:Nylon 66, UL94V-0
- Q'TY: 500, 1000 pcs/bag

NO	DIMENSION (mm)			MATERIAL
	A	B	C	
2	3.96	8.00	5.18	NYLON 66 UL94V-0
3	7.92	11.96	9.14	
4	11.88	15.92	13.10	
5	15.84	19.88	17.06	
6	19.80	23.84	21.02	
7	23.76	27.80	24.98	
8	27.72	31.76	28.94	
9	31.68	35.72	32.90	
10	35.64	39.68	36.86	
11	39.60	43.64	40.82	
12	43.56	47.60	44.78	



SECTION A-A

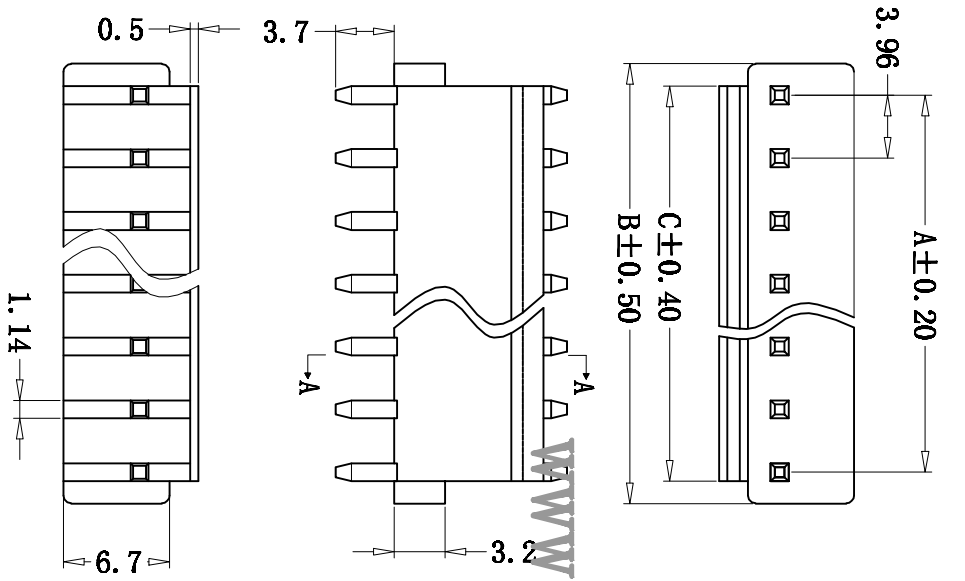

www.szjusun.cn

JUSUN 钜赛实业(深圳)有限公司 JUSAI INDUSTRIAL (SHENZHEN) CO.,LTD		TITLE: VH-1A	
USE:	MAT'L	APPD:	PART NO.:
FINISH:	CHKD:	DR:	DWG NO.:
UNITS: mm	Q'TY	SCALE 1:1	SHEET 1/1
		REV. XI	